




LLZ2V0 – LLZ75V

500mW Hermetically Sealed Glass Zener
Voltage Regulators

MINI MELF

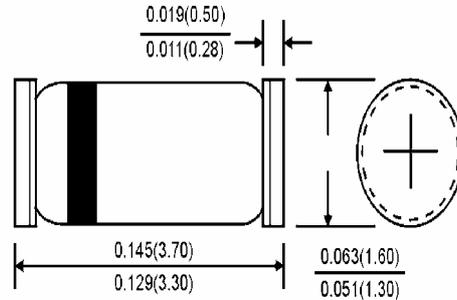

Features

- ✧ Zener voltage range 2.0 to 75 volts
- ✧ Mini-MELF package
- ✧ Surface device type mounting
- ✧ Hermetically sealed glass
- ✧ Compression bonded construction
- ✧ All external surfaces are corrosion resistant and leads are readily solderable
- ✧ RoHS compliant
- ✧ Matte Tin (Sn) lead finish
- ✧ Color band indicates negative polarity

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Type Number	Symbol	Value	Units
Power Dissipation	P_d	500	mW
Maximum Forward Voltage @ $I_F=200\text{mA}$	V_F	1.2	V
Storage Temperature Range	T_{STG}	-65 to + 200	°C
Operating Junction Temperature	T_J	+ 200	°C

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device	V _Z @ I _{ZT} (Volts) Nom	I _{ZT} mA	Z _{ZT} @ I _{ZT} Ω Max	I _R @ V _R (uA) Max	V _R Volts
LLZ2V0	2.0	5	100	120	0.5
LLZ2V2	2.2	5	100	120	0.7
LLZ2V4	2.4	5	100	120	1.0
LLZ2V7	2.7	5	110	100	1.0
LLZ3V0	3.0	5	120	50	1.0
LLZ3V3	3.3	5	120	20	1.0
LLZ3V6	3.6	5	100	10	1.0
LLZ3V9	3.9	5	100	5	1.0
LLZ4V3	4.3	5	100	5	1.0
LLZ4V7	4.7	5	80	5	1.0
LLZ5V1	5.1	5	80	5	1.5
LLZ5V6	5.6	5	60	5	2.5
LLZ6V2	6.2	5	60	5	3.0
LLZ6V8	6.8	5	20	2.0	3.5
LLZ7V5	7.5	5	20	0.5	4.0
LLZ8V2	8.2	5	20	0.5	5.0
LLZ9V1	9.1	5	25	0.5	6.0
LLZ10V	10.0	5	30	0.2	7.0
LLZ11V	11.0	5	30	0.2	8.0
LLZ12V	12	5	30	0.2	9.0
LLZ13V	13	5	35	0.2	10.0
LLZ15V	15	5	40	0.2	11.0
LLZ16V	16	5	40	0.2	12.0
LLZ18V	18	5	45	0.2	13
LLZ20V	20	5	45	0.2	15
LLZ22V	22	5	30	0.2	17
LLZ24V	24	5	35	0.2	19
LLZ27V	27	5	45	0.2	21
LLZ30V	30	5	55	0.2	23

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device	V _Z @ I _{ZT} (Volts) Nom	I _{ZT} mA	Z _{ZT} @ I _{ZT} Ω Max	I _R @ V _R (μ A) Max	V _R Volts
LLZ33V	33	5	65	0.2	25
LLZ36V	36	5	75	0.2	27
ZZL39V	39	5	85	0.2	30
LLZ43V	43	5	90	0.2	33
LLZ47V	47	5	90	0.2	36
LLZ51V	51	5	110	0.2	39
LLZ56V	56	5	110	0.2	43
LLZ62V	62	2	201	0.2	47
LLZ68V	68	2	230	0.2	51
LLZ75V	75	2	240	0.2	56

- Notes:
1. The type numbers listed have zener voltage as shown and have a standard tolerance on the nominal zener voltage of $\pm 5\%$.
 2. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances.
 3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK} .