




查询"5310F7"供应商

CML

INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

5310F Series T-1 LED Circuit Board Indicator

DESCRIPTION AND FEATURES

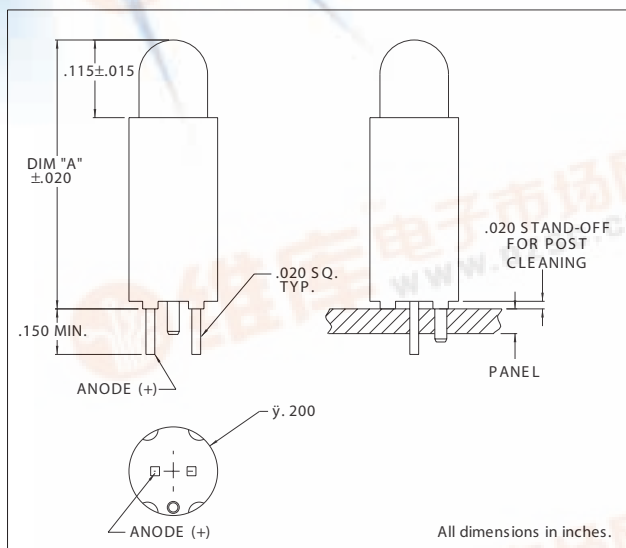

Features

- Block mounting, height and spacing alignment saves assembly cost and time.
- Standoffs prevent flux entrapment.
- Press-in mounting pin secures assembly to PC board while soldering.

Housing: Black Nylon, UL94V-O

Alternate LEDs are available in this package as standard variations.

Mounting hole pattern on page 1-X6.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)	DIM A (inches)
5310F1	Red	10	10	30	2.0	3.0	5	650	.580
5310F3	Amber	7	10	30	2.2	3.0	5	603	.580
5310F5	Green	16	10	30	2.2	3.0	5	562	.580
5310F7	Yellow	6.3	10	30	2.1	3.0	5	585	.580
5312F1	Red	10	10	30	2.0	3.0	5	650	.810
5312F5	Green	7	10	30	2.2	3.0	5	562	.810
5312F7	Yellow	6.3	10	30	2.1	3.0	5	585	.810
5315F1	Red	10	10	30	2.0	3.0	5	650	.550
5315F5	Green	7	10	30	2.2	3.0	5	562	.550
5315F7	Yellow	6.3	10	30	2.1	3.0	5	585	.550



CML
INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

America:
CML Innovative Technologies, Inc.
147 Central Avenue
Hackensack - NJ 07601 - USA
Tel: 1-201-489-8989
Fax: 1-201-489-6911
e-mail: americas@cml-it.com

Europe:
CML Technologies GmbH & Co. KG
Robert-Bunsen-Str. 1
67098 Bad Dürkheim - GERMANY
Tel: +49 (0)6322 9567-0
Fax: +49 (0)6322 9567-88
e-mail: europe@cml-it.com

Asia:
CML Innovative Technologies, Inc.
61 Aida Street
Singapore 459975
Tel: (65) 9630-5003
e-mail: asia@cml-it.com

CML-IT reserves the right to make specification revisions that enhance the design and/or performance of the product