




# Model 36

[查询"36PR10KLF"供应商](#)


## ENVIRONMENTAL

|                                  |                  |
|----------------------------------|------------------|
| Operating Temperature Range      | -30°C to +100°C  |
| Rotational Life, 50 Cycles       | ±10% ΔR          |
| Load Life, 0.3W, 500 Hours, 70°C | ±5% ΔR           |
| Resistance to Solder Heat        | 260°C for 3 sec. |
| Aqueous cleaning not recommended |                  |

## ORDERING INFORMATION<sup>2</sup>

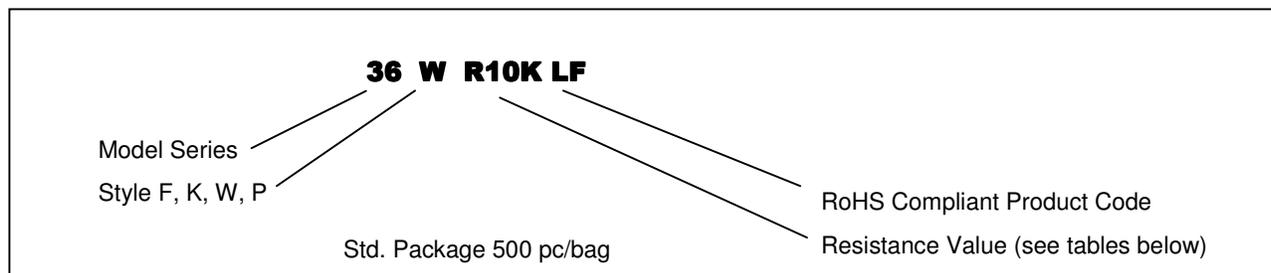

## CIRCUIT DIAGRAM



## STANDARD RESISTANCE VALUES AND MARKING


| Resistance<br>(ohms) | Part<br>Marking |
|----------------------|-----------------|
| 100                  | 12              |
| 200                  | 22              |
| 500                  | 52              |
| 1K                   | 13              |
| 2K                   | 23              |
| 5K                   | 53              |
| 10K                  | 14              |
| 20K                  | 24              |
| 50K                  | 54              |
| 100K                 | 15              |
| 200K                 | 25              |
| 500K                 | 55              |
| 1MEG                 | 16              |

<sup>2</sup> Contact our customer service for custom designs and features.


# Model 36

## OUTLINE DRAWING

Model 36F (Top Adjust)

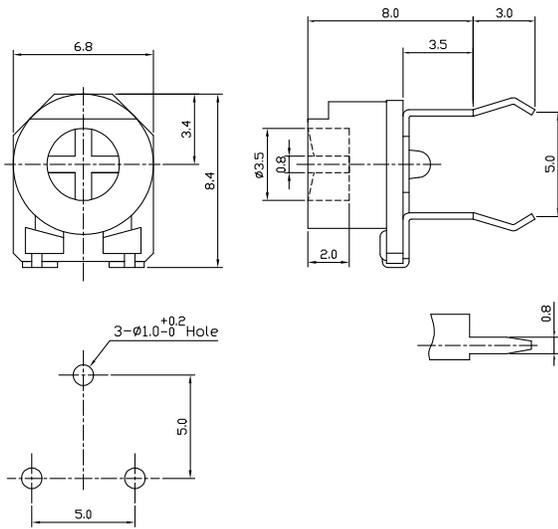


Model 36K (Side Adjust)

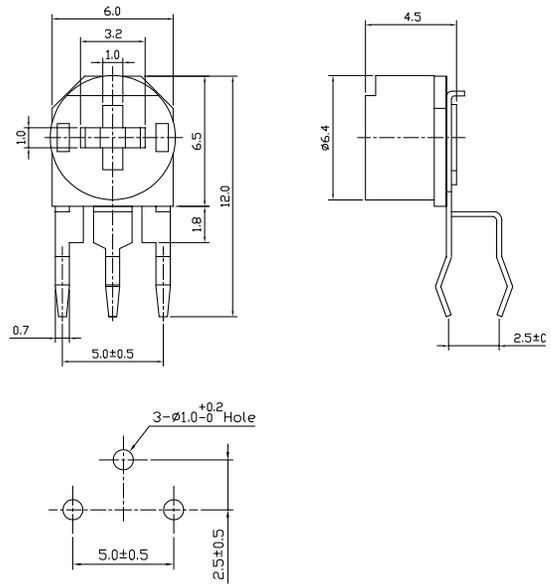


PCB MOUNTING PATTERN

Model 36W (Side Adjust)

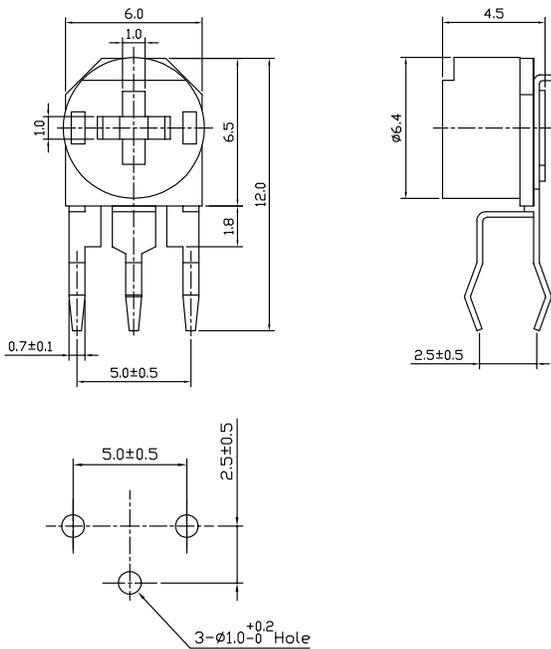

PCB MOUNTING PATTERN

Model 36P (Top Adjust)

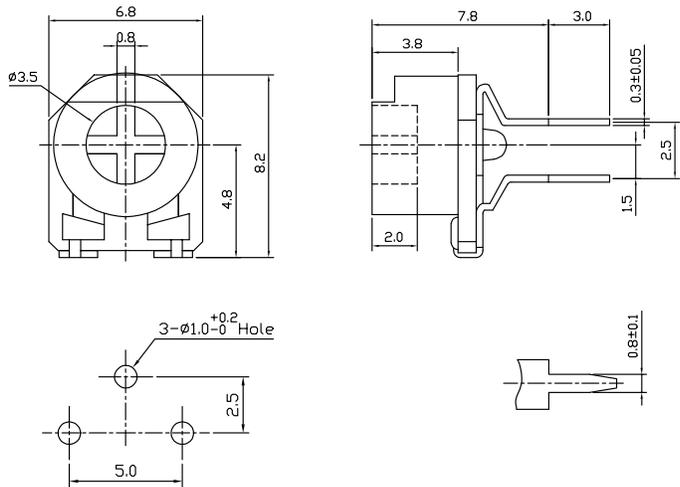

PCB MOUNTING PATTERN

<sup>3</sup> Dimensions are in millimeters.