

[查询"900AGQ"供应商](#)

SERIES 900 SWITCHES

SUB-MINIATURE SMT PUSHBUTTON SWITCHES



900 AGQ


SPECIFICATIONS

Rating:	100mA @ 50 VDC
Mechanical Life:	50,000 cycles typical
Contact Resistance:	80mΩ max. typical @ 2-4 VDC
Insulation Resistance:	100mA
Dielectric Strength:	100MΩ min.
Operating Force:	>1,000 Vrms at sea level
	50 ± 25 gf

MATERIALS

Housing:	4/6 Nylon
Actuator:	6T Nylon
Cover:	Stainless steel
Contacts:	Silver plated phosphor bronze
Terminals:	Silver plated brass
Spring:	Stainless steel

HOW TO ORDER

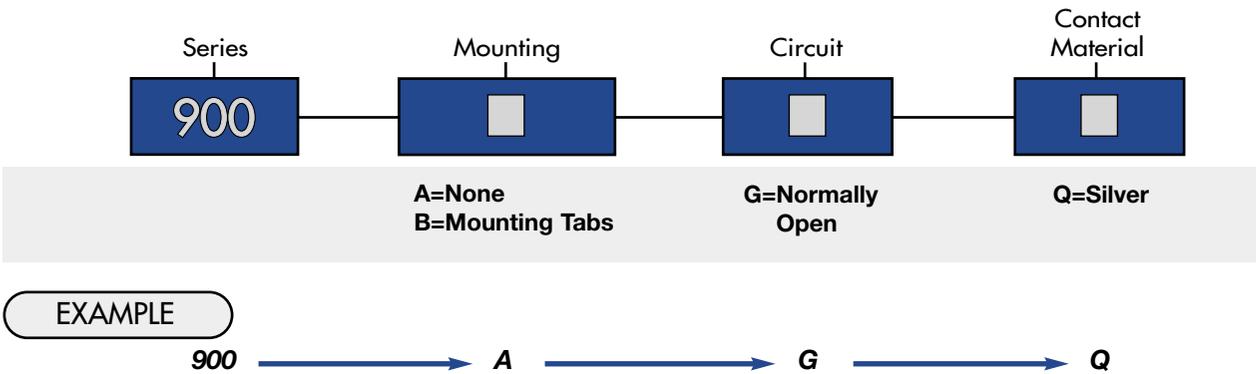



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

查询"900AGQ"供应商


SERIES 900 SWITCHES

SUB-MINIATURE SMT PUSHBUTTON SWITCHES



P.C. MOUNTING

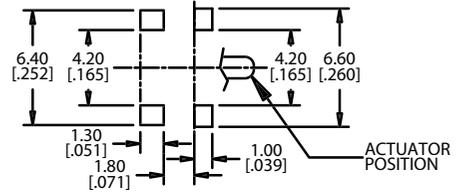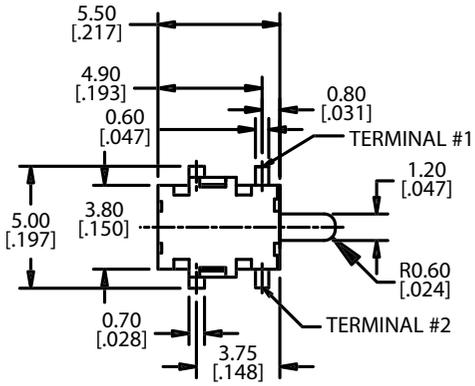

Schematic




P.C. MOUNTING

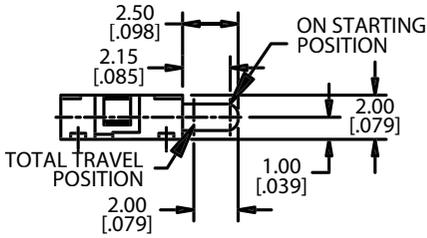


P.C. MOUNTING

WITH MOUNTING TABS

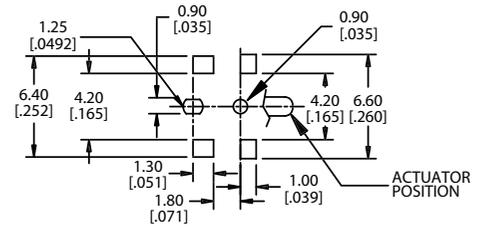

Schematic



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

900 SMT TAPE AND REEL

