



**CML**
**INNOVATIVE TECHNOLOGIES**
**WHERE INNOVATION COMES TO LIGHT**

### 3990A Series Panel Mounted LED Indicator

#### DESCRIPTION AND FEATURES

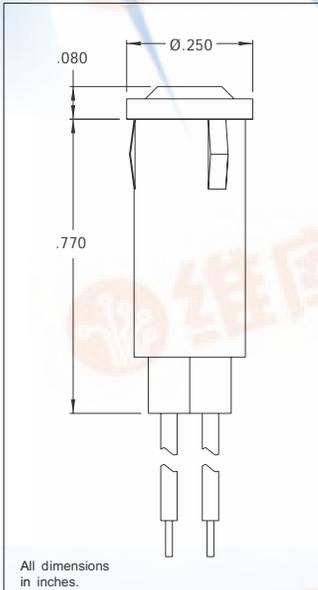

#### Features

Mounting: Will snap-fit in Ø.217/.221 hole in panels .031/.062 thick.

Wire Leads: No.24 AWG, 4.4/4.8 long, stripped .430/.570

Anode(+): Red lead

Housing: White nylon

Lens: Polycarbonate

#### ELECTRO-OPTICAL CHARACTERISTICS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @1ms-300pps (A)	Reverse Break-down Voltage Min. (V)	
3990A1	Red	10	10	30	2.0	3.0	1.0	5	
3990A3	Amber	7	10	30	2.2	3.0	.09	5	
3990A5	Green	16	10	30	2.2	3.0	.09	5	
3990A7	Yellow	6.3	10	30	2.1	3.0	1.0	5	
3991A6-5V	Blue	Use #680 Incandescent Lamp-5V, .06A, 200,000 Hours							


**CML**  
**INNOVATIVE TECHNOLOGIES**  
**WHERE INNOVATION COMES TO LIGHT**

America:  
 CML Innovative Technologies, Inc.  
 147 Central Avenue  
 Hackensack, NJ 07601 -USA  
 Tel: 1-201-489-8989  
 Fax: 1-201-489-6911  
 e-mail: americas@cml-it.com

Europe:  
 CML Technologies GmbH & Co.KG  
 Robert-Bunsen-Str.1  
 67098 Bad Dürkheim -GERMANY  
 Tel: +49 (0)6322 9567-0  
 Fax: +49 (0)6322 9567-88  
 e-mail: europe@cml-it.com

Asia:  
 CML Innovative Technologies, Inc.  
 61 Aida Street  
 Singapore 459975  
 Tel: (65)9630-5003  
 e-mail: asia@cml-it.com