



# MBRF1535CT THRU MBRF15100CT

Isolation 15.0 AMPS. Schottky Barrier Rectifiers



Voltage Range  
35 to 100 Volts  
Current  
15.0 Amperes


## Features

- ✧ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guardring for transient protection
- ✧ High temperature soldering guaranteed:  
260°C/10 seconds, 0.25"(6.35mm) from case

## Mechanical Data

- ✧ Cases: ITO-220AB molded plastic body
- ✧ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs. max
- ✧ Weight: 0.08 ounce, 2.24 grams

## ITO-220AB

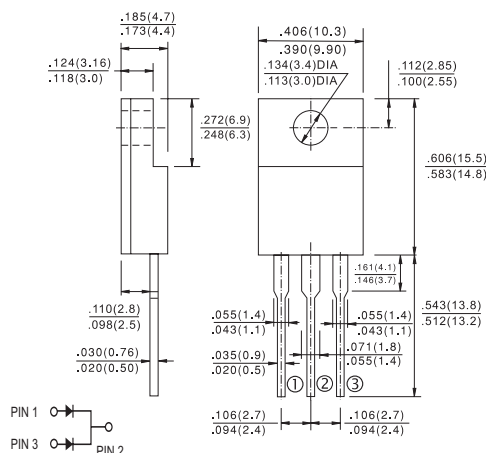

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number                                                                                                                                                                                                                               | Symbol            | MBRF<br>1535CT            | MBRF<br>1545CT | MBRF<br>1550CT         | MBRF<br>1560CT | MBRF<br>1590CT         | MBRF<br>15100CT | Units    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|----------------|------------------------|----------------|------------------------|-----------------|----------|
| Maximum Recurrent Peak Reverse Voltage                                                                                                                                                                                                    | V <sub>RRM</sub>  | 35                        | 45             | 50                     | 60             | 90                     | 100             | V        |
| Maximum RMS Voltage                                                                                                                                                                                                                       | V <sub>RMS</sub>  | 24                        | 31             | 35                     | 42             | 63                     | 70              | V        |
| Maximum DC Blocking Voltage                                                                                                                                                                                                               | V <sub>DC</sub>   | 35                        | 45             | 50                     | 60             | 90                     | 100             | V        |
| Maximum Average Forward Rectified Current<br>at T <sub>C</sub> =105°C                                                                                                                                                                     | I <sub>(AV)</sub> | 15                        |                |                        |                |                        |                 | A        |
| Peak Repetitive Forward Current (Rated V <sub>R</sub> , Square Wave,<br>20KHz) at T <sub>C</sub> =105°C                                                                                                                                   | I <sub>FRM</sub>  | 15.0                      |                |                        |                |                        |                 | A        |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave<br>Superimposed on Rated Load (JEDEC method )                                                                                                                                    | I <sub>FSM</sub>  | 150                       |                |                        |                |                        |                 | A        |
| Peak Repetitive Reverse Surge Current (Note 1)                                                                                                                                                                                            | I <sub>RRM</sub>  | 1.0                       |                | 0.5                    |                |                        |                 | A        |
| Maximum Instantaneous Forward Voltage at (Note 2)<br>I <sub>F</sub> =7.5A, T <sub>C</sub> =25°C<br>I <sub>F</sub> =7.5A, T <sub>C</sub> =125°C<br>I <sub>F</sub> =15A, T <sub>C</sub> =25°C<br>I <sub>F</sub> =15A, T <sub>C</sub> =125°C | V <sub>F</sub>    | –<br>0.57<br>0.84<br>0.72 |                | 0.75<br>0.65<br>–<br>– |                | 0.92<br>0.82<br>–<br>– |                 | V        |
| Maximum Instantaneous Reverse Current @ T <sub>C</sub> =25°C<br>at Rated DC Blocking Voltage (Note 2) @ T <sub>C</sub> =125°C                                                                                                             | I <sub>R</sub>    | 0.1<br>15.0               |                | 1.0<br>50.0            |                | 0.1<br>–               |                 | mA<br>mA |
| Voltage Rate of Change (Rated V <sub>R</sub> )                                                                                                                                                                                            | dV/dt             | 10,000                    |                |                        |                |                        |                 | V/μs     |
| Maximum Thermal Resistance Per Leg (Note 3)                                                                                                                                                                                               | R <sub>θJC</sub>  | 3.5                       |                |                        |                |                        |                 | °C/W     |
| Operating Junction Temperature Range                                                                                                                                                                                                      | T <sub>J</sub>    | -65 to +150               |                |                        |                |                        |                 | °C       |
| Storage Temperature Range                                                                                                                                                                                                                 | T <sub>STG</sub>  | -65 to +175               |                |                        |                |                        |                 | °C       |

Notes: 1. 2.0us Pulse Width, f=1.0 KHz

2. Pulse Test: 300us Pulse Width, 1% Duty Cycle

3. Thermal Resistance from Junction to Case with heatsink size of 2" x 3" x 0.25" AL-plate

# RATINGS AND CHARACTERISTIC CURVES (MBRF1535CT THRU MBRF15100CT)

FIG.1- FORWARD CURRENT DERATING CURVE

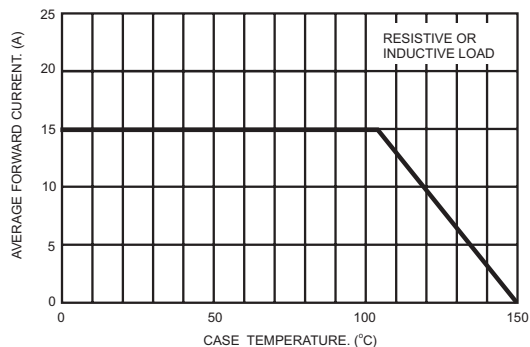


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

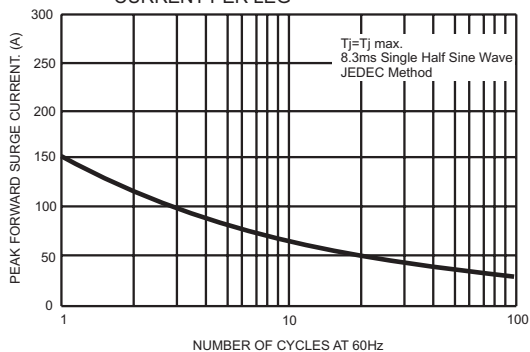


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

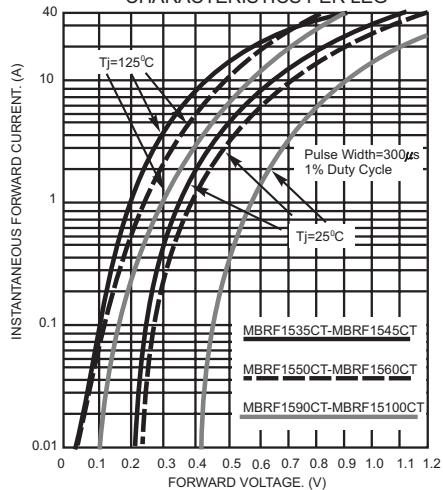


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

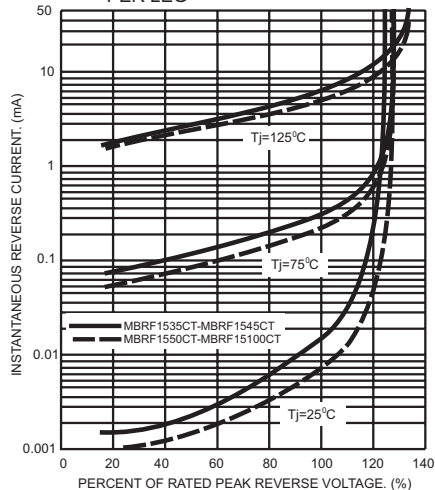


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

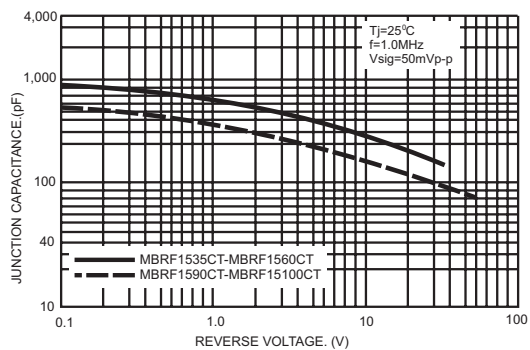


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS PER LEG

