



1 kHz to 1.28 MHz
8-Bit Programmable

2" x 4"
8-Pole Filters

Description

The 818 Series are digitally programmable low-pass and high-pass active filters that are tunable over a 256:1 frequency range. 818 filters are available with any one of five standard factory-set tuning ranges or 8-bit custom ranges from 1 kHz to 1.28 MHz. These units contain 8 CMOS logic inputs.

818 Series models are convenient, low profile, easy to use fully finished filters which require no external components or adjustments. They feature low harmonic distortion, and near theoretical amplitude characteristics. 818 filters operate from non-critical ± 12 to ± 18 Vdc power supplies, have a 5 k Ω (min.) input impedance, a 10 Ω (max.) output impedance and low-pass models offer dc voltage offset adjustment.

Features/Benefits:

- Low harmonic distortion and wide signal-to-noise ratio to 12-bit resolution
- Digitally programmable corner frequency allows selecting cut-off frequencies specific to each application
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time
- Factory-set tuning range, no external clocks or adjustments needed
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications

Applications

- Anti-alias and band-pass filtering
- Data acquisition systems
- Satellite and telecommunications
- Acoustic and vibration analysis and control
- Aerospace, navigation and sonar
- Medical research and electronic equipment
- Engine test and simulation
- Noise elimination
- Video systems
- Signal reconstruction



Programmable Specifications	Page
Digital Tuning & Control	2

Available Low-Pass Models:	Page
818L8B 8-pole Butterworth	3
818L8L 8-pole Bessel	3
818L8E 8-pole, 6-zero elliptic, 1.77	3
818L8D80 8-pole, 6-zero constant delay	3

Available High-Pass Models:	Page
818H8B 8-pole Butterworth	4
818H8E 8-pole, 6-zero elliptic, 1.77	4

General Specifications:	
Phase and phase match considerations	5 & 6
Ordering information	7
Pin-out/package data	7





Digital Tuning & Control Characteristics

8-Bit Programmable Filters

Digital Tuning Characteristics

The digital tuning interface circuits are two 4042 quad CMOS latches which accept the following CMOS-compatible inputs: eight tuning bits ($D_0 - D_7$), a latch strobe bit (C), and a transition polarity bit (P).

Filter tuning follows the tuning equation given below:

$$f_c = (f_{\max}/256) [1 + D_7 \times 2^7 + D_6 \times 2^6 + D_5 \times 2^5 + D_4 \times 2^4 + D_3 \times 2^3 + D_2 \times 2^2 + D_1 \times 2^1 + D_0 \times 2^0]$$

where $D_1 - D_7 = "0"$ or $"1"$, and

$f_{\max}$ = Maximum tuning frequency;

f_c = corner frequency;

Minimum tunable frequency = $f_{\max}/256$ (D_0 thru $D_7 = 0$);

Minimum frequency step (Resolution) = $f_{\max}/256$

Data Control Specifications

Data Control Lines

Functions	Latch Strobe (C)
	Transition Polarity (P)

Data Control Modes

Mode 1	P = 0; C = 0 frequency follows input codes
	P = 0; C = 0↑ frequency latched on rising edge
Mode 2	P = 1; C = 1 frequency follows input codes
	P = 1; C = 1↓ frequency latched on falling edge

Input Data Levels (CMOS Logic)

Input Voltage ($V_s = 15$ Vdc)

Low Level In	0 Vdc min.	4 Vdc max.
High Level In	11 Vdc min.	15 Vdc max.

Input Current

High Level In	-10^{-5} μ A typ.	-1 mA max.
Low Level In	$+10^{-5}$ μ A typ.	+1 μ A max.

Input Capacitance

5 pF typ	7.5 pF max.
----------	-------------

Latch Response

Data Set Up Time ¹	25 nS
Data Hold Time ²	50 nS
Strobe Pulse Width	80 nS min.

Input Data Format Frequency Select Bits

Positive Logic
Logic "1" = +Vs
Logic "0" = Gnd

Bit Weighting


D_0	LSB (least significant bit)
D_7	MSB (most significant bit)

Frequency Range 256 : 1, Binary Weighted

Pin-Out Key

IN	Analog Input Signal	D_7 Tuning Bit 7 (MSB)
OUT	Analog Output Signal	D_6 Tuning Bit 6
GND	Power and Signal Return	D_5 Tuning Bit 5
"P"	Transition Polarity Bit	D_4 Tuning Bit 4
"C"	Tuning Strobe Bit	D_3 Tuning Bit 3
+Vs	Supply Voltage, Positive	D_2 Tuning Bit 2
-Vs	Supply Voltage, Negative	D_1 Tuning Bit 1
Os	Optional Offset Adjustment	D_0 Tuning Bit 0 (LSB)
NC	No Connect (Highpass Models)	

OUT +Vs -Vs

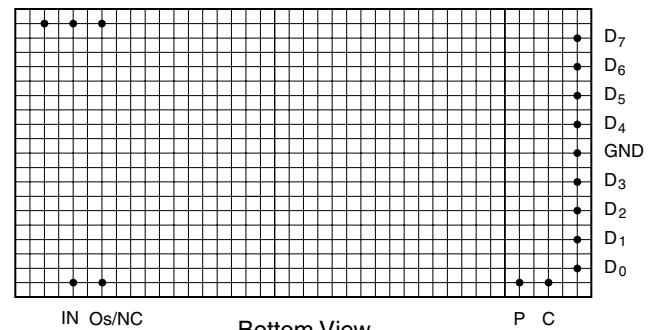

MSB	---	---	---	---	---	---	LSB	Bit Weight
2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	f_c Corner Frequency
D_7	D_6	D_5	D_4	D_3	D_2	D_1	D_0	
0	0	0	0	0	0	0	0	$f_{\max}/256$
0	0	0	0	0	0	0	1	$f_{\max}/128$
0	0	0	0	0	0	1	1	$f_{\max}/64$
0	0	0	0	0	1	1	1	$f_{\max}/32$
0	0	0	0	1	1	1	1	$f_{\max}/16$
0	0	0	1	1	1	1	1	$f_{\max}/8$
0	0	1	1	1	1	1	1	$f_{\max}/4$
0	1	1	1	1	1	1	1	$f_{\max}/2$
1	1	1	1	1	1	1	1	$f_{\max}$

Notes:

1.Frequency data must be present before occurrence of strobe edge.

2.Frequency data must be present after occurrence of strobe edge.



8-Bit Programmable

8-Pole Low-Pass Filters

Model	818L8B	818L8L	818L8E	818L8D80
Product Specifications				
Transfer Function	8-Pole, Butterworth	8-Pole, Bessel	8-Pole, 6 zero, Elliptic	8-Pole, 6 zero, Constant Delay
Size	2.0" x 4.0" x 0.4"	2.0" x 4.0" x 0.4"	2.0" x 4.0" x 0.4"	2.0" x 4.0" x 0.4"
Range f_c	1 kHz to 128 MHz	1 kHz to 1.28 MHz	1 kHz to 1.28 MHz	1 kHz to 1.28 MHz
Theoretical Transfer Characteristics	Appendix A Page 9	Appendix A Page 4	Appendix A Page 24	Appendix A Page 21
Passband Ripple (theoretical)	0.0 dB	0.0 dB	± 0.035 dB	0.15 dB
DC Voltage Gain (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
Stopband Attenuation Rate	48 dB/octave	48 dB/octave	80 dB min.	80 dB min.
Cutoff Frequency Stability Amplitude Phase	$f_c \pm 3\%$ max. $\pm 0.01\%$ /°C - 3 dB -360°	$f_c \pm 3\%$ max. $\pm 0.01\%$ /°C - 3 dB -182°	$f_r \pm 3\%$ max. $\pm 0.01\%$ /°C - 0.035 dB - 323.5°	$f_c \pm 3\%$ max. $\pm 0.01\%$ /°C - 3 dB -306°
Filter Attenuation (theoretical)	0.12 dB 0.80 f_c 3.01 dB 1.00 f_c 60.0 dB 2.37 f_c 80.0 dB 3.16 f_c	1.91 dB 0.80 f_c 3.01 dB 1.00 f_c 60.0 dB 4.52 f_c 80.0 dB 6.07 f_c	0.035 dB 1.00 f_r 3.01 dB 1.13 f_r 60.0 dB 1.67 f_r 80.0 dB 1.77 f_r	3.01 dB 1.00 f_c 60.0 dB 3.08 f_c 80.0 dB 3.57 f_c
Phase Match¹	See page 5 & 6	See page 5 & 6	See page 5 & 6	See page 5 & 6
Amplitude Accuracy (theoretical)	0 - 0.6 $f_c \pm 0.5$ dB max. ± 0.25 dB typ. 0.6 f_c - 1.0 $f_c \pm 1.0$ dB max. ± 0.6 dB typ.	0 - $f_c \pm 0.8$ dB max. ± 0.4 dB typ.	0 - 0.8 $f_r \pm 0.5$ dB max. ± 0.25 dB typ. 0.8 f_c - 1.0 $f_r \pm 1.0$ dB max. ± 0.5 dB typ.	0 - 0.8 $f_c \pm 0.5$ dB max. ± 0.25 dB typ. 0.8 f_c - 1.0 $f_c \pm 1.0$ dB max. ± 0.5 dB typ.
Total Harmonic Distortion @ 1 kHz	< - 88 dB typ.	< - 88 dB typ.	< - 88 dB typ.	< - 88 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	300 μ Vrms typ.	300 μ Vrms typ.	350 μ Vrms typ.	300 μ Vrms typ.
Narrow Band Noise (5 Hz - 100 kHz)	75 μ Vrms typ.	75 μ Vrms typ.	75 μ Vrms typ.	75 μ Vrms typ.
Filter Mounting Assembly	FMA-04A	FMA-04A	FMA-04A	FMA-04A

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.



8-Bit Programmable

8-Pole High-Pass Filters

Model	818H8B	818H8E		
Product Specifications				
Transfer Function	8-Pole, Butterworth	8-Pole, 6-zero, Elliptic		
Size	2.0" x 4.0" x 0.4"	2.0" x 4.0" x 0.4"		
Range f_c	1 kHz to 1.28 MHz	1 kHz to 1.28 MHz		
Theoretical Transfer Characteristics	Appendix A Page 29	Appendix A Page 37		
Passband Ripple (theoretical)	0.0 dB	± 0.035 dB		
Voltage Gain (non-inverting)	0 ± 0.5 dB to 1.28 MHz	0 ± 0.5 dB to 1.28 MHz		
Power Bandwidth	(-6 dB) 5 MHz	(-6 dB) 5 MHz		
Stopband Attenuation Rate	48 dB/octave	80 dB		
Cutoff Frequency Stability Amplitude Phase	$f_c \pm 3\%$ max. $\pm 0.01\%$ /°C - 3 dB -360°	$f_r \pm 3\%$ max. $\pm 0.01\%$ /°C - 0.035 dB -323.5°		
Filter Attenuation (theoretical)	80 dB 0.31 f_c 60 dB 0.42 f_c 3.01 dB 1.00 f_c 0.00 dB 2.00 f_c	80.0 dB 0.56 f_r 60.0 dB 0.60 f_r 3.01 dB 0.88 f_r 0.03 dB 1.00 f_r 00.0 dB 2.00 f_r		
Amplitude Accuracy (theoretical)	1.0 - 1.25 $f_c \pm 0.5$ dB max. ± 0.3 dB typ. 1.25 f_c -1.28MHz ± 1.0 dB max. ± 0.5 dB typ.	1.00 - 1.25 $f_r \pm 0.5$ dB max. ± 0.3 dB typ. 1.25 f_r -1.28MHz ± 1.0 dB max. ± 0.5 dB typ.		
Total Harmonic Distortion @ 1 kHz	< - 88 dB typ.	< - 88 dB typ.		
Wide Band Noise	400 μ Vrms typ.	450 μ Vrms typ.		
Narrow Band Noise	100 μ Vrms typ.	100 μ Vrms typ.		
Filter Mounting Assembly	FMA-04A	FMA-04A		

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.



1 kHz to 1.28 MHz

Phase and Phases Match Considerations

Phase Deviation from Theoretical:

The phase response of the amplifiers and the capacitance of the frequency control switches of the 818 series contribute to the overall phase response and cause it to deviate from theoretical. For the higher frequency models (-4 and -5), where the cutoff frequencies can be programmed up to 1.28MHz, the deviation from theoretical can be substantial.

Figure 1 is a normalized plot of the phase deviation from theoretical for an 818L8E-5 for programmed cutoff frequencies from 5kHz ($f_{c \min}$) to 1.28MHz ($f_{c \max}$). For f_c of 5kHz, the deviation from the 323° theoretical phase shift is 2° but for f_c of 1.28MHz the deviation is 78°. This set of curves can be used to estimate the deviation from theoretical phase for other models in the 818 series.

Figure 1 represents a "maximum deviation from theoretical phase" situation. Other models (i.e. -1 to -4) will exhibit a similar set of phase deviation curves with the phase scale being reduced by the ratio of the $f_{\max}$ of the model to the $f_{\max}$ of the -5. For example, an L8E-1, whose programming frequency range is from 1kHz to 256kHz (1/5 of the range of the -5 model) will have a similar set of phase deviation curves but the maximum phase deviation, at the highest frequency setting ($f_{c \max}$), will be approximately 1/5 that of the -5 model (78/5 = 15.6°). The other programmed settings of the -1 will also produce proportionally reduced phase deviations.

Unit to Unit Phase Match²

The actual phase shift through a filter at a frequency " f " is determined by its programmed frequency " f_c ", the theoretical phase response of the transfer function (B, L, E, or D80) and the phase deviation from theoretical which in turn depends upon component tolerances, the model # (i.e. -1 through -5) and frequency to which it is programmed. It is therefore not possible to have a meaningful unit to unit phase match that is specified by a single number.

For a group of the same model type and number, programmed to the same frequency, the unit to unit phase match can be approximated as a percentage of the theoretical phase shift with a correction term added to accommodate amplifier induced phase deviations.

EXAMPLE: Phase Match Calculation

$$\Delta\Phi(f)_{\max} = 0.02^\circ \times \Phi_{\tau}(f) + \frac{4.0^\circ \times f/f_c \times f_{\max}/1.28\text{MHz}}{\begin{matrix} 4.0^\circ - \text{L8L} \\ 3.0^\circ - \text{L8B \& L8D80} \\ 2.0^\circ - \text{L8L} \end{matrix}}$$

$$\Delta\Phi(f)_{\text{typ}} = 0.5 \times \Delta\Phi(f)_{\max}$$

where: $\Delta\Phi(f)$ = phase match at frequency f
 $\Phi_{\tau}(f)$ = theoretical phase shift at f
 f = frequency of interest
 $f_{\max}$ = maximum f_c of the model
 f_c = frequency to which the filter is programmed

Eg. - for an 818L8E-3, the phase deviation from theoretical at a frequency of 192kHz, when the cutoff frequency f_c is programmed to 384kHz is:

$$f/f_c = 192\text{kHz}/384\text{kHz} = 0.5, f_{\max} = 768\text{kHz} \\ \Phi_{\tau}(f) = 133^\circ \text{ (from data table at } f/f_c = 0.5)$$

Phase Match:

$$\Delta\Phi(f)_{\max} = 0.02^\circ \times \Phi_{\tau}(f) + 4.0^\circ \times f/f_c \times f_{\max}/1.28\text{MHz} \\ = 0.02 \times (-133^\circ) + 4.0^\circ \times 0.5 \times 768\text{kHz}/1.28\text{MHz} \\ = 2.66^\circ + 1.20^\circ = +3.86^\circ$$

$$\Delta\Phi(f)_{\text{typ}} = 0.5 \times \Delta\Phi(f)_{\max} = 0.5^\circ \times 3.86^\circ = 1.93^\circ$$


818L8E Phase Deviation (in degrees "°") from Theoretical vs. Normalized Input Frequency

programmed setting of f_c

f/f_c	5kHz	10kHz	20kHz	40kHz	80kHz	160kHz	320kHz	640kHz	1.28MHz
0.10	0.15	0.18	0.17	0.08	-0.12	-0.52	-1.18	-2.57	-5.32
0.20	0.30	0.32	0.30	0.17	-0.39	-1.03	-2.41	-5.17	-10.76
0.30	0.34	0.42	0.40	-0.18	-0.57	-1.59	-3.66	-7.89	-16.29
0.40	0.20	0.40	0.50	-0.20	-0.90	-2.30	-5.10	-10.80	-22.10
0.50	0.20	0.32	0.60	-0.40	-1.20	-3.00	-6.70	-14.00	-28.20
0.60	0.00	0.00	-0.10	-0.80	-1.90	-4.10	-8.70	-17.70	-35.10
0.70	-0.21	-0.30	-0.60	-1.30	-2.70	-5.40	-11.00	-21.80	-42.60
0.80	-0.50	-0.60	-1.30	-2.10	-3.80	-7.20	-13.90	-26.90	-51.30
0.85	-0.80	-1.00	-1.80	-2.80	-4.70	-8.40	-15.80	-30.10	-56.40
0.90	-1.20	-1.60	-2.50	-3.70	-5.80	-10.00	-18.40	-33.80	-62.30
0.95	-1.90	-2.40	-3.50	-4.80	-7.30	-12.00	-21.10	-38.30	-69.20
1.00	-2.50	-3.30	-4.60	-6.20	-8.90	-14.10	-24.30	-43.30	-77.50



Phase Deviation from Theoretical

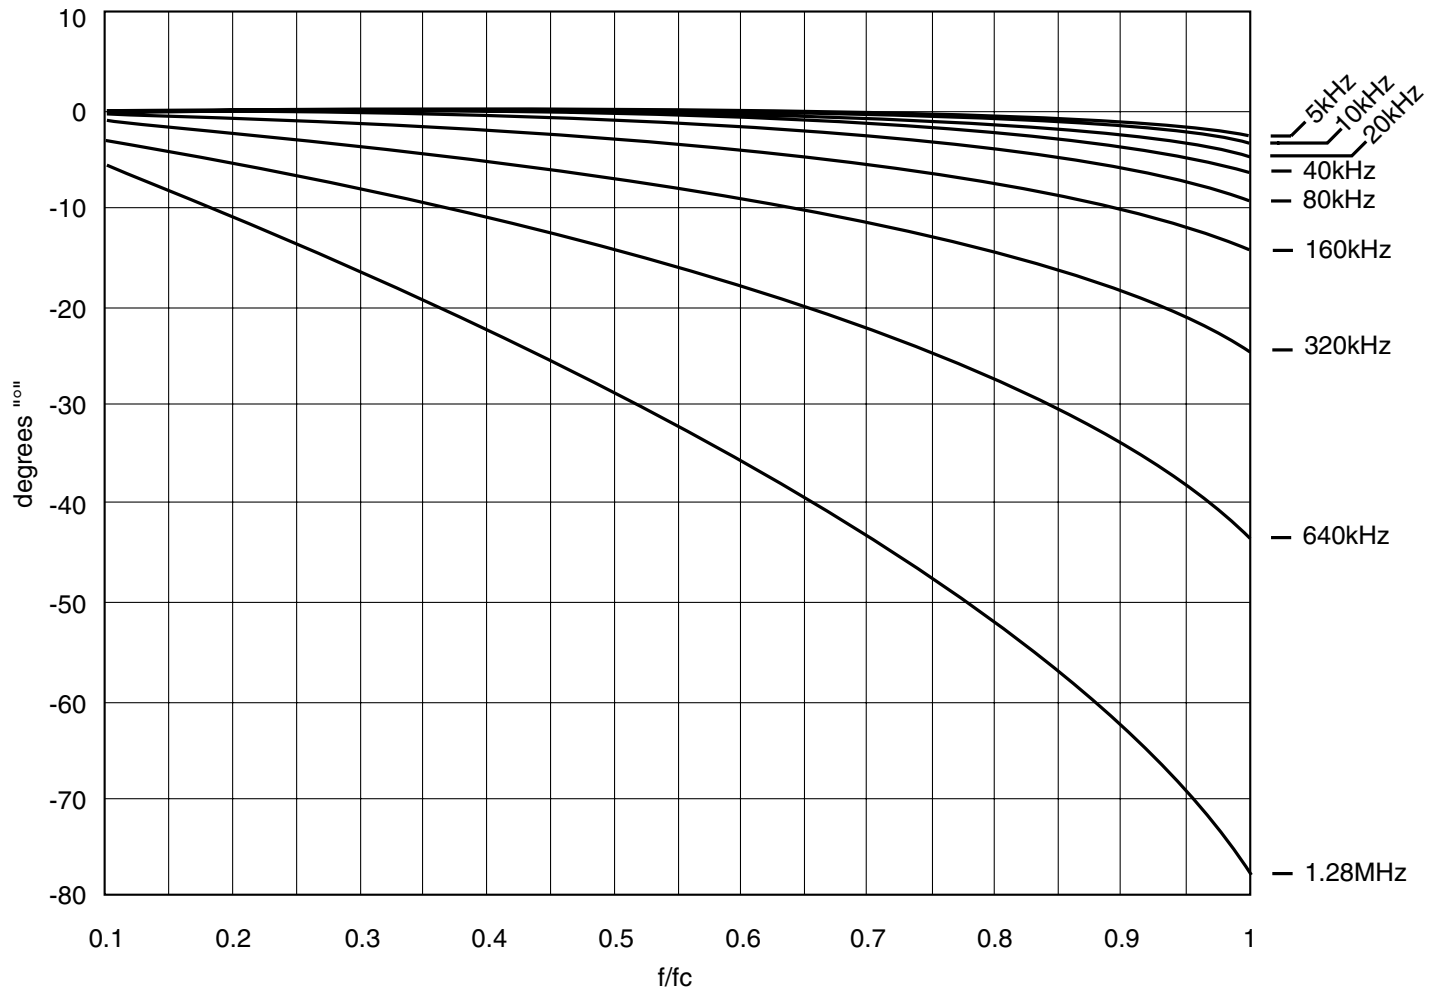



Specification (25°C and $V_s \pm 15$ Vdc)

Analog Input Characteristics¹

Impedance	5 k Ω min.
Voltage Range	± 10 Vpeak
Max. Safe Voltage	$\pm V_s$

Analog Output Characteristics

Impedance (Closed Loop)	1 Ω typ. 10 Ω max.
Linear Operating Range	± 10 V
Maximum Current ²	± 5 mA
Offset Voltage ³	2 mV typ. 10 mV max.
Offset Temp. Coeff.	50 μ V/°C

Power Supply ($\pm V_s$)


Rated Voltage	± 15 Vdc
Operating Range	± 12 to ± 18 Vdc
Maximum Safe Voltage	± 18 Vdc
Quiescent Current	100 mA typ. 120 mA max.

Temperature

Operating	0 to +70°C
Storage	-25 to +85°C


Notes:

1. Input and output signal voltage referenced to supply common.
2. Output is short circuit protected to common.
DO NOT CONNECT TO $\pm V_s$.
3. Adjustable to zero.
4. Units operate with or without offset pin connected.

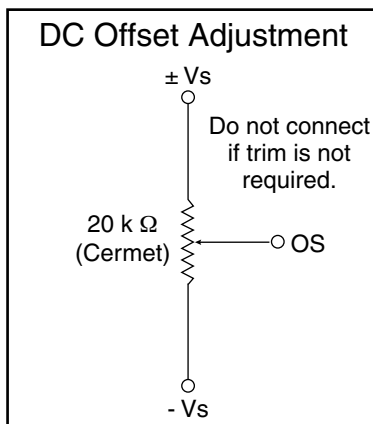


Pin-Out and Package Data Ordering Information

Pin-Out & Package Data

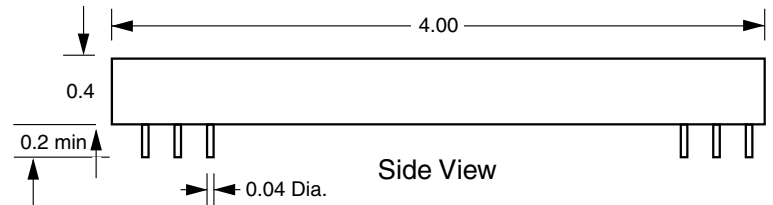

All dimensions are in inches
All Case Dimensions ± 0.02 "
Grid Dimensions 0.1" x 0.1"

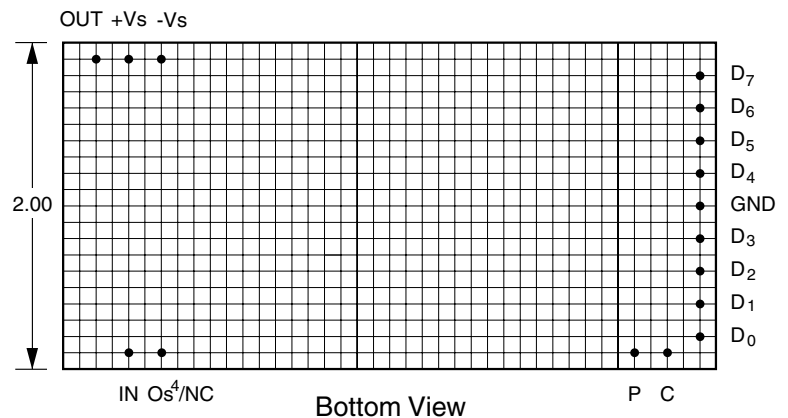

Filter Mounting Assembly-See FMA-04A

Ordering Information

Filter Type

L - Low Pass
H - High Pass

Transfer Function

B - Butterworth
L - Bessel
E - elliptic
D80 - constant delay

818L8E-5

Model Number	Tuning Range (kHz)	Minimum Step (kHz)
1	1kHz to 256kHz	1kHz
2	2kHz to 512kHz	2kHz
3	3kHz to 768kHz	3kHz
4	4kHz to 1,024kHz	4kHz
5	5kHz to 1,280kHz	5kHz



Appendix A

Theoretical Transfer Characteristics


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.00	0.00	0.00	.506
0.10	-0.029	-18.2	.506
0.20	-0.117	-36.4	.506
0.30	-0.264	-54.7	.506
0.40	-0.470	-72.9	.506
0.50	-0.737	-91.1	.506
0.60	-1.06	-109	.506
0.70	-1.45	-128	.506
0.80	-1.91	-146	.506
0.85	-2.16	-155	.506
0.90	-2.42	-164	.506
0.95	-2.71	-173	.506
1.00	-3.01	-182	.506
1.10	-3.67	-200	.506
1.20	-4.40	-219	.506
1.30	-5.20	-237	.506
1.40	-6.10	-255	.505
1.50	-7.08	-273	.504
1.60	-8.16	-291	.502
1.70	-9.36	-309	.498
1.80	-10.7	-327	.492
1.90	-12.1	-345	.482
2.00	-13.7	-362	.468
2.25	-18.1	-402	.417
2.50	-23.1	-436	.352
2.75	-28.3	-465	.291
3.00	-33.4	-489	.241
3.25	-38.3	-509	.201
3.50	-43.1	-526	.170
4.00	-51.8	-552	.126
5.00	-66.8	-587	.077
6.00	-79.2	-610	.052
7.00	-89.8	-626	.038
8.00	-99.0	-638	.029
9.00	-107	-647	.023
10.0	-114	-655	.018

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

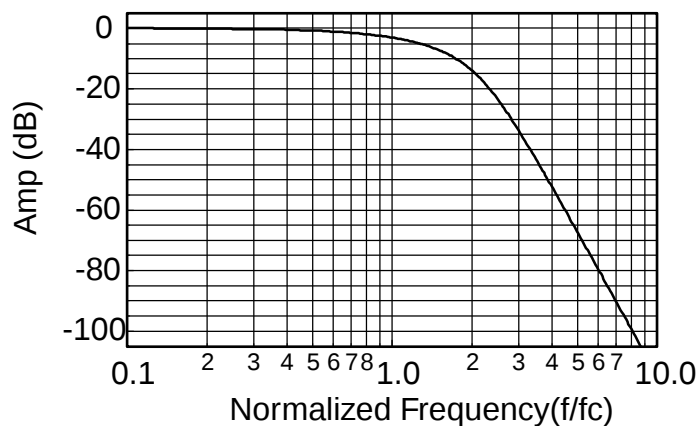


Delay (Normalized)

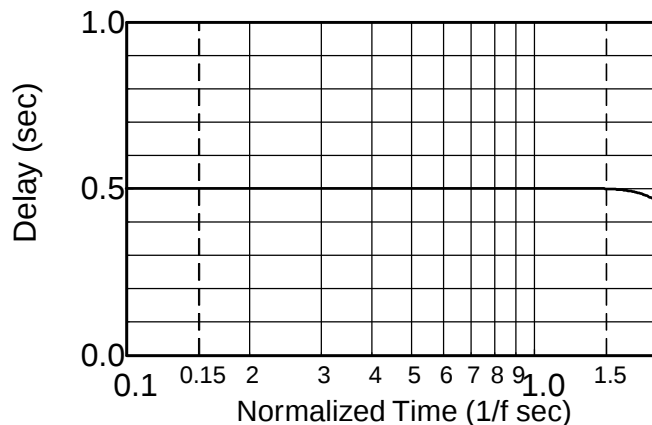

Step Response

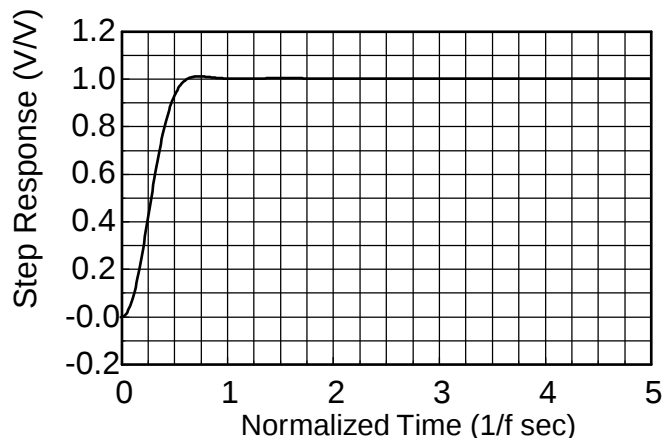



Appendix A

Theoretical Transfer Characteristics


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.816
0.10	0.00	-29.4	.819
0.20	0.00	-59.0	.828
0.30	0.00	-89.1	.843
0.40	0.00	-120	.867
0.50	0.00	-152	.903
0.60	-0.001	-185	.956
0.70	-0.014	-221	1.04
0.80	-0.121	-261	1.19
0.85	-0.311	-283	1.29
0.90	-0.738	-307	1.40
0.95	-1.58	-333	1.48
1.00	-3.01	-360	1.46
1.10	-7.48	-408	1.17
1.20	-12.9	-445	.873
1.30	-18.2	-472	.672
1.40	-23.4	-494	.540
1.50	-28.2	-511	.448
1.60	-32.7	-526	.380
1.70	-36.9	-539	.328
1.80	-40.8	-550	.287
1.90	-44.6	-560	.253
2.00	-48.2	-568	.226
2.25	-56.3	-586	.174
2.50	-63.7	-600	.139
2.75	-70.3	-611	.113
3.00	-76.3	-621	.094
3.25	-81.9	-629	.080
3.50	-87.1	-635	.069
4.00	-96.3	-646	.052
5.00	-112	-661	.033
6.00	-125	-671	.023
7.00	-135	-678	.017
8.00	-144	-683	.013
9.00	-153	-687	.010
10.0	-160	-691	.008

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

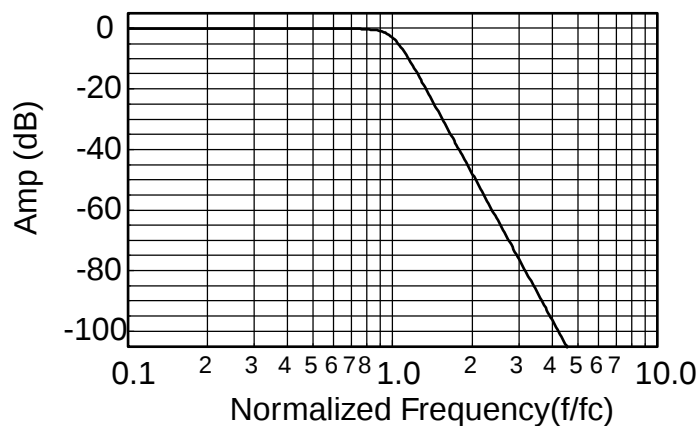

Delay (Normalized)

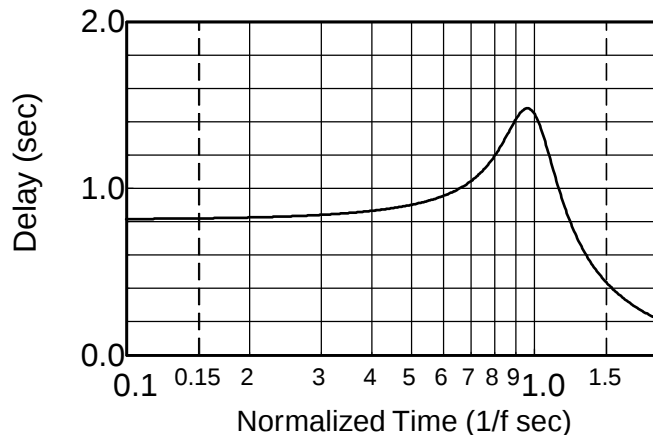

Step Response

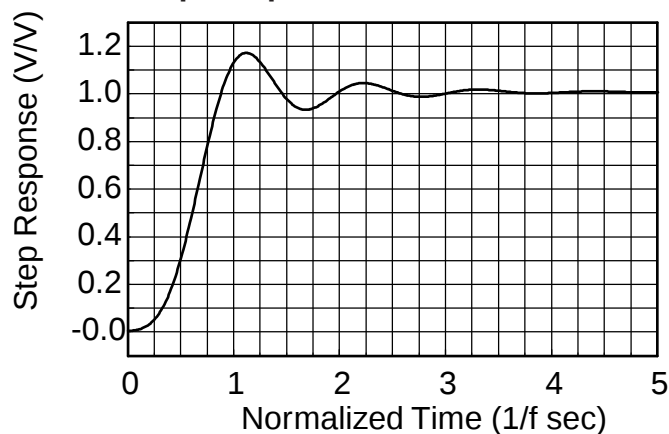



Appendix A

Theoretical Transfer Characteristics


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.852
0.10	0.017	-30.7	.852
0.20	0.058	-61.3	.852
0.30	0.099	-92.0	.852
0.40	0.105	-123	.852
0.50	0.034	-153	.852
0.60	-0.157	-184	.852
0.70	-0.510	-215	.852
0.80	-1.07	-245	.851
0.85	-1.44	-261	.850
0.90	-1.89	-276	.849
0.95	-2.41	-291	.846
1.00	-3.01	-306	.841
1.10	-4.50	-336	.821
1.20	-6.39	-365	.783
1.40	-11.3	-417	.656
1.60	-17.1	-459	.512
1.80	-23.2	-492	.396
2.00	-29.1	-517	.312
2.25	-36.3	-542	.239
2.50	-43.4	-561	.189
2.75	-50.3	-576	.153
3.00	-57.6	-589	.127
3.25	-62.5	-599	.107
3.50	-75.4	-608	.092
3.75	-98.3	-616	.079
4.00	-86.3	-442	.069
4.25	-84.1	-448	.061
4.50	-85.1	-454	.054
4.75	-87.9	-458	.049
5.00	-92.8	-462	.044
5.25	-104	-466	.040
5.50	-101	-289	.036
5.75	-93.3	-293	.033
6.00	-89.9	-295	.030
6.50	-86.6	-300	.026
7.00	-85.1	-305	.022
8.00	-84.1	-312	.017
9.00	-84.3	-317	.013
10.0	-84.9	-321	.011

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

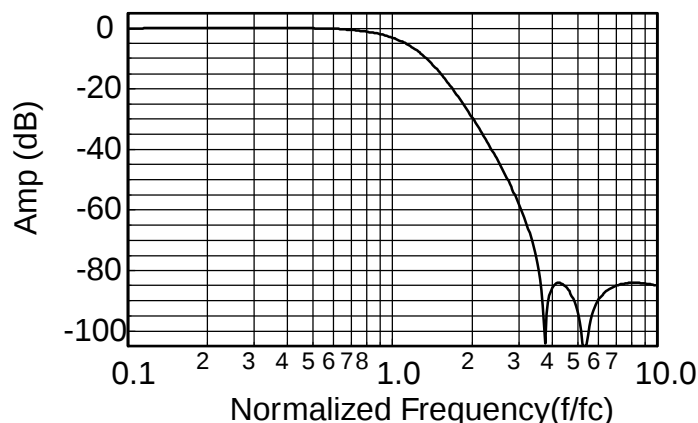


Delay (Normalized)

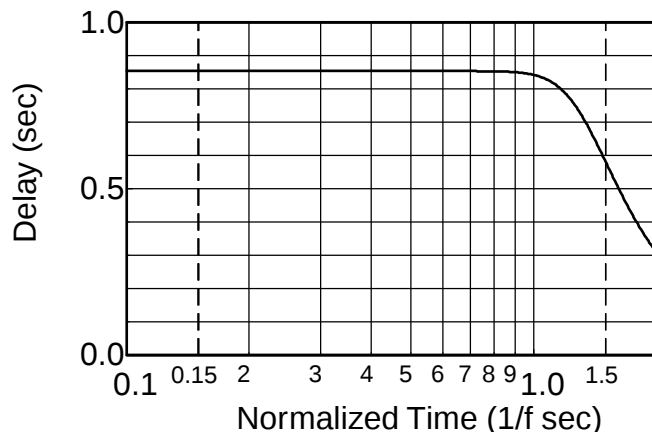

Step Response

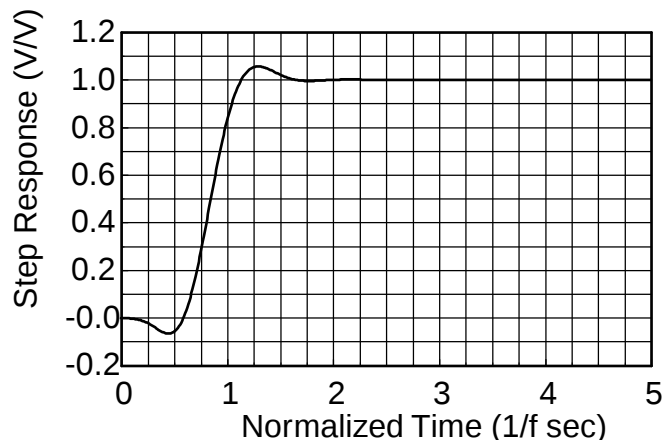



Appendix A

Theoretical Transfer Characteristics


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	0.713
0.10	-0.004	-25.7	0.716
0.20	-0.014	-51.6	0.724
0.30	-0.024	-77.9	0.740
0.40	-0.020	-105	0.767
0.50	0.007	-133	0.811
0.55	0.022	-148	0.840
0.60	0.033	-163	0.872
0.65	0.031	-179	0.908
0.70	0.014	-196	0.946
0.75	-0.015	-213	0.989
0.80	-0.041	-232	1.04
0.85	-0.046	-251	1.12
0.90	-0.016	-272	1.23
0.95	-0.025	-296	1.40
1.00	-0.035	-323	1.65
1.10	-1.76	-392	2.14
1.20	-8.28	-467	1.86
1.30	-18.4	-522	1.19
1.40	-29.3	-558	0.753
1.50	-40.1	-578	0.517
1.60	-51.5	-594	0.381
1.70	-65.2	-606	0.296
1.75	-75.0	-611	0.265
1.80	-113.0	-616	0.239
1.85	-83.6	-440	0.217
1.90	-82.0	-444	0.198
1.95	-83.7	-447	0.182
2.00	-87.8	-450	0.168
2.20	-85.8	-280	0.126
2.40	-82.0	-289	0.099
2.60	-83.5	-295	0.081
2.80	-88.2	-301	0.067
3.00	-99.9	-305	0.057
3.50	-87.2	-134	0.040
4.00	-83.1	-140	0.030
5.00	-82.1	-148	0.018
6.00	-83.1	-154	0.013
7.00	-84.6	-157	0.009
8.00	-86.2	-160	0.007
9.00	-87.8	-163	0.005
10.0	-89.3	-164	0.004

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

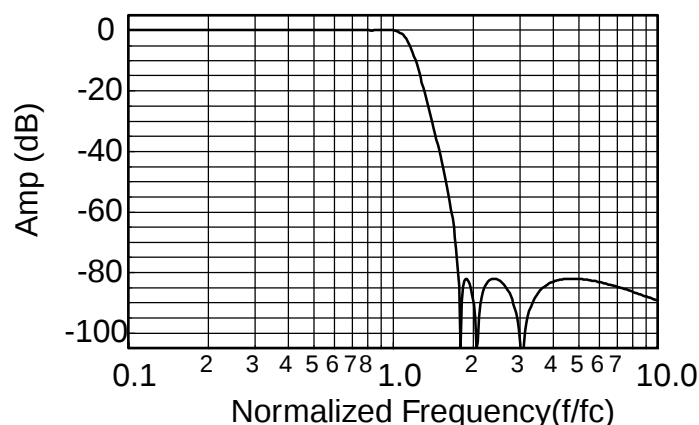

Delay (Normalized)

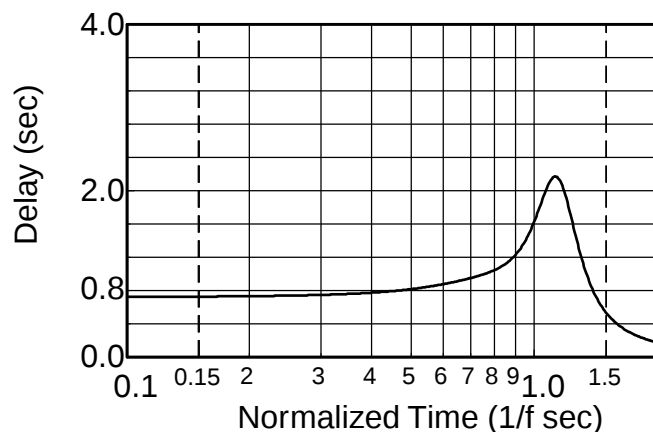

Step Response

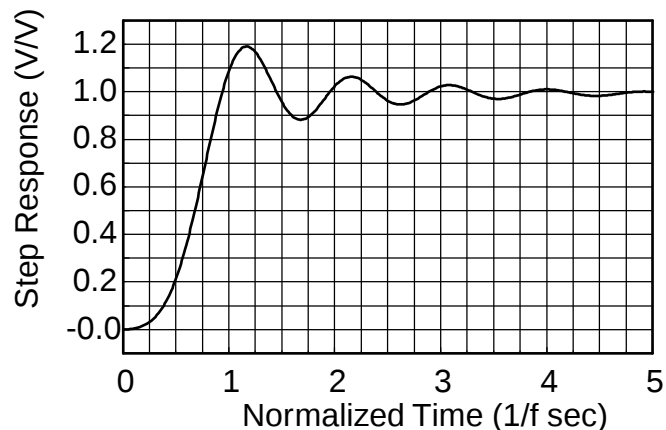




Appendix A

Theoretical Transfer Characteristics

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.10	-160	691	0.819
0.20	-112	661	0.828
0.30	-83.7	631	0.843
0.40	-63.7	600	0.867
0.50	-48.2	568	0.903
0.60	-35.5	535	.956
0.70	-24.8	499	1.04
0.80	-15.6	459	1.19
0.85	-11.6	437	1.29
0.90	-8.06	413	1.40
0.95	-5.15	386	1.48
1.00	-3.01	360	1.46
1.20	-0.229	275	0.873
1.40	-0.020	226	0.540
1.60	-0.002	194	0.380
1.80	0.00	170	0.287
2.00	0.00	152	0.226
2.50	0.00	120	0.139
3.00	0.00	99.2	0.094
4.00	0.00	74.0	0.052
5.00	0.00	59.0	0.033
6.00	0.00	49.0	0.023
7.00	0.00	42.1	0.017
8.00	0.00	36.8	0.013
9.00	0.00	32.7	0.010
10.0	0.00	29.4	0.008


Frequency Response

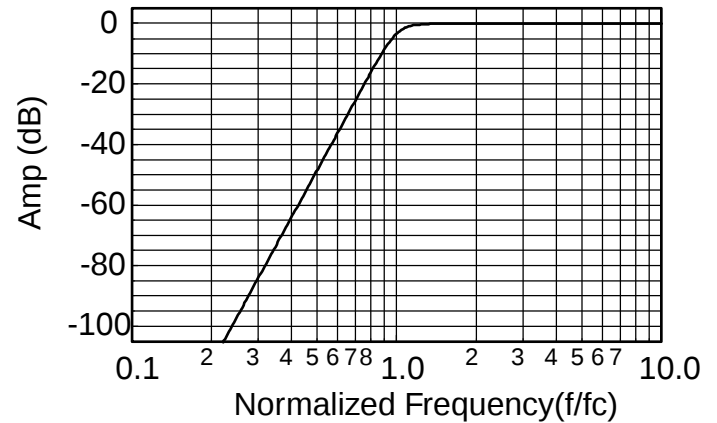

1.Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




Appendix A

Theoretical Transfer Characteristics

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.10	-89.3	164	0.440
0.20	-82.1	148	0.459
0.30	-90.6	131	0.495
0.40	-82.4	292	0.559
0.50	-87.8	450	0.671
0.55	-90.0	437	0.761
0.60	-60.2	603	0.890
0.70	-32.4	563	1.37
0.80	-13.1	498	2.35
0.85	-6.28	451	2.77
0.90	-2.21	401	2.66
0.95	-0.51	358	2.15
1.00	-0.03	324	1.64
1.10	-0.01	277	1.04
1.20	-0.05	225	0.757
1.30	-0.03	221	0.596
1.40	0.01	201	0.486
1.50	0.03	185	0.409
1.60	0.03	172	0.347
1.70	0.03	160	0.299
1.80	0.02	150	0.260
1.90	0.01	141	0.229
2.00	0.01	133	0.203
2.50	-0.02	105	0.123
3.00	-0.02	86.9	0.083
4.00	-0.02	64.7	0.046
5.00	-0.01	51.6	0.029
6.00	-0.01	42.9	0.020
7.00	-0.01	36.8	0.015
8.00	-0.01	32.1	0.011
9.00	-0.01	28.6	0.009
10.0	0.00	25.7	0.007

Frequency Response

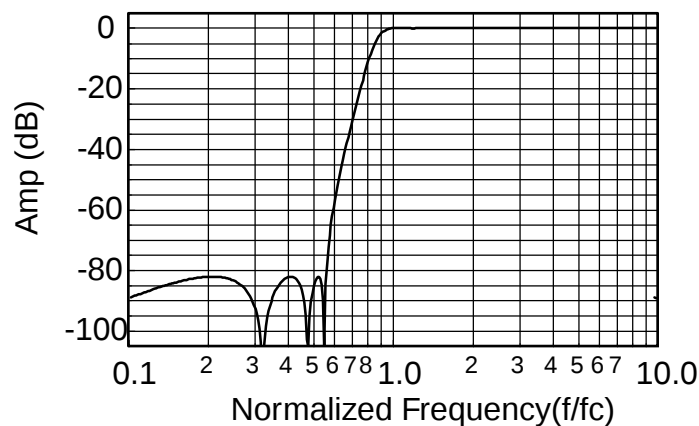

1.Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz.The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$