

V-Range

Suitable for commercial applications: pubs, restaurants, shops, workshops, offices, sports halls and canteens, etc



查询"12620"供应商

700 3456

Axial wall/window/surfaced mounted extractor fans with automatic shutter

- Fan with special blades for high performance and low noise levels.
- Flow rate and pressure are guaranteed because they are certified by the IMQ Information Label.
- Integral time delay automatic shutter prevents backdraughts
- Components made of top quality synthetic resins.
- Quiet operation.
- Motor with thermal overload protection.
- Splashproof external grille.
- Quick and easy installation and maintenance (all components accessible and easily removed).
- Operation indicator light.

Design: F. Trabucco - M. Vecchi



Wall/window fans with manual (M) – automatic shutter (A) – reversible model (R)


Automatic time delay Shutter

Automatic shutter opens after a time delay of 30 seconds.

Accessories

(Description on pages 53-60)

Dimensions (in mm)

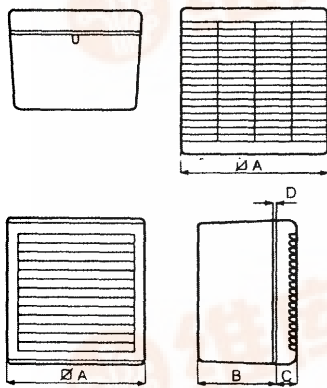

	Ø A	B	C	D
V 15/6" M	210	93	31	2+3
V 23/9" M	291	128	31	2+3
V 30/12" AR	370	142	31	2+3

Product	VORTICE 15/6" M	VORTICE 15/6" A	VORTICE 23/9" M	VORTICE 23/9" AR	VORTICE 30/12" AR	
Shutter	Manual	Automatic	Manual	Automatic	Automatic	
Code	12780	12620	12790	12760	12770	
Hole dia. mm	185-190	185-190	257-262	257-262	324-329	
Volt at 50 Hz	220-240	220-240	220-240	220-240	220-240	
Watt	30	34	33	37	74	
Rated current (A)	0.16	0.17	0.17	0.18	0.35	
Rpm	1820	1820	1260	1260/1340*	1080/1220*	
Extract capacity	m³/hr	220	220	620	Ext. 620/172.2*	Ext. 1100/305.6*
	L/s	61.1	61.1	172.2	Int. 400/111.1*	Int. 750/208.3*
Sound power level (dBA)	57	57	56	60	69	
Sound pressure level (dBA) 3m	43	43	43	46	56	
Approvals						
Poids kg	1.25	1.4	3	3.35	5.6	
Insulation	cl. II	cl. II	cl. II	cl. II	cl. II	
Protection	Flush fitted external grille					
Maximum ambient operating temperature 50°C						

Conforms with ISO 3744 for noise and pressure levels

*Data refers to out/intake capacity