

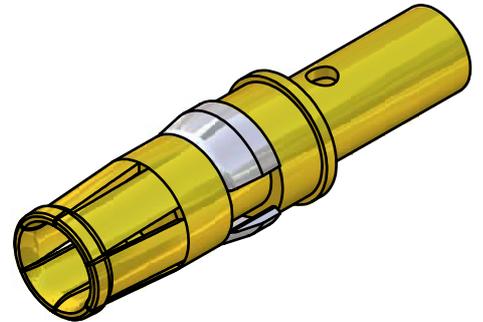
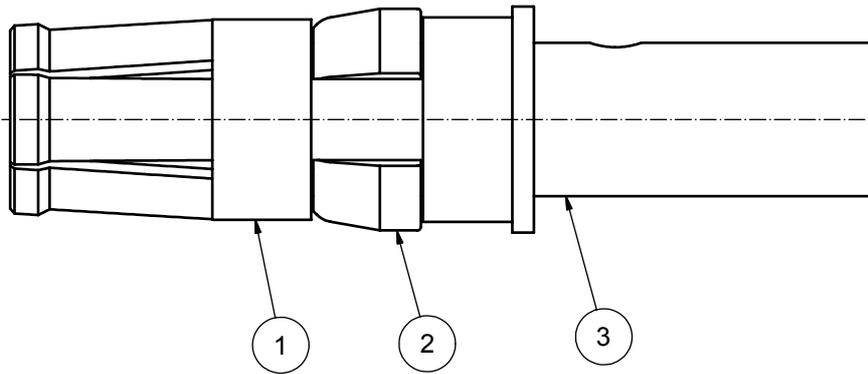


查询"13-000301"供应商

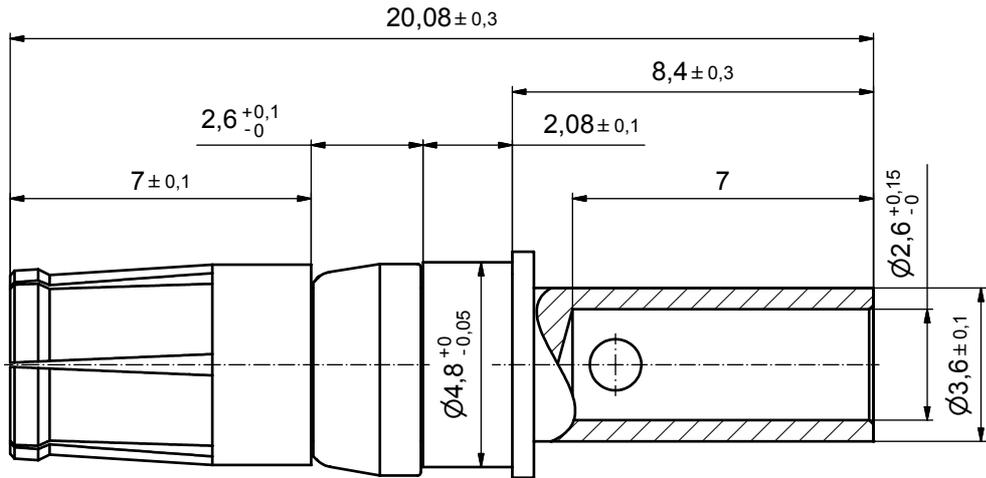

STRIPPING DIMENSIONS



Directive 2002/95/EC  
„RoHS“  
Compliant

NOTES:

CRIMPING:  
USE CRIMP TOOL: 360X10409X  
WITH TOOL INSERT: 36-000060  
SELECTOR SETTINGS: 5 FOR AWG 12  
4 FOR AWG 14

3	1	REAR SIDE	COPPER ALLOY	min. 8µin HARD GOLD over min. 50µin NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
item	quantity	part description	material	plating

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

tolerance ISO 2768-m		dim. in mm		scale: 8:1	
date		name		material: see partlist	
drawn	03.01.08	Schmidt		title: HIGH POWER CONTACT FEMALE CRIMP VERSION 20A D-SUB COMBINATION	
appd.	03.01.08	Koch		dwg no: Inventor 10	
norm				DIN- A3	
d-old				sh: 1	
a Origin		CONEC®		part no: 13K1A2380	
rev.	description	date	name	part no: 13-000301	