
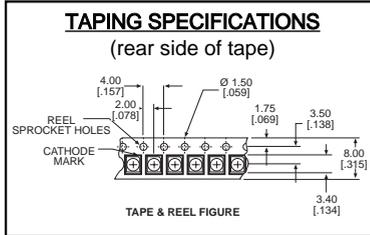


Surface Mount LED Bi-Color

597-7701-2xx
597-7721-2xx

1

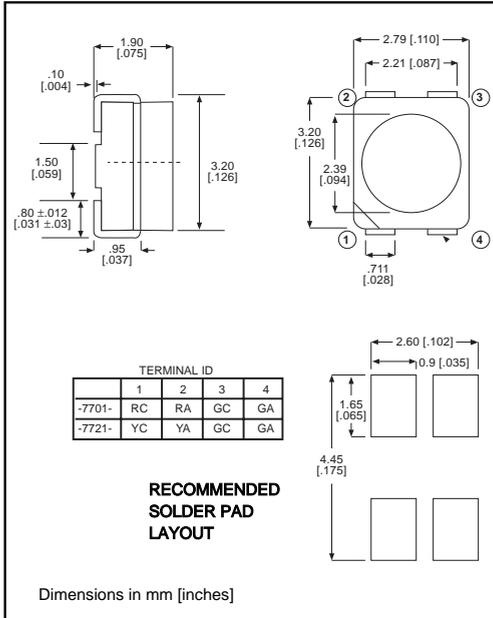

PART NO.*	COLOR
597-7701-2xx	Red/Green
597-7721-2xx	Yellow/Green

Features

- Compatible with automatic placement equipment
- Compatible with infrared reflow processes
- Packaged on 8mm tape, 7" reels (meets EIA-481-1 standard)
- Helps to eliminate mixed technology PC board processing
- Compatible with Dialight's Optopipe™ Series light pipes

*ORDERING INFORMATION	
597-77x1-2xx	
packaging option	
02	20 pieces on tape
07	7" reel, 1500 pcs/reel

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)	Red/Green	Yellow/Green
	-7701	-7721
Power Dissipation (mW)	100/100	60/100
Forward Current (mA)	30/30	20/30
Derating (mA/°C) From 50°C	.6/.6	.4/.6
Peak Current (mA)	120/120	80/100
Pulse width 10 μs		
Operating Temperature (°C)	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100
Soldering Profile	235°C peak 15 seconds, 185° for 90 seconds	



Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS ($T_A=25^\circ\text{C}$)	Red/Green		Yellow/Green
	-7701		-7721
Luminous Intensity (mcd)	Min.	8/8	8/8
$I_F=20\text{mA}$	Typical	16/16	16/16
Peak Wavelength (nm)	Typical	630/565	585/565
λ Peak			
Viewing Angle ($2\theta_{1/2}$)	Typical	120°	120°
Forward Voltage (V)	Typical	2/2.1	1.8/2.1
$I_F=20\text{mA}$	Max.	2.6/2.6	2.7/2.6

$\theta_{1/2}$ is the off axis angle at which the luminous intensity is half the axial luminous intensity

**Surface Mount LED
 Bi-Color**

597-7731-2xx
 597-7741-2xx
 597-7761-2xx

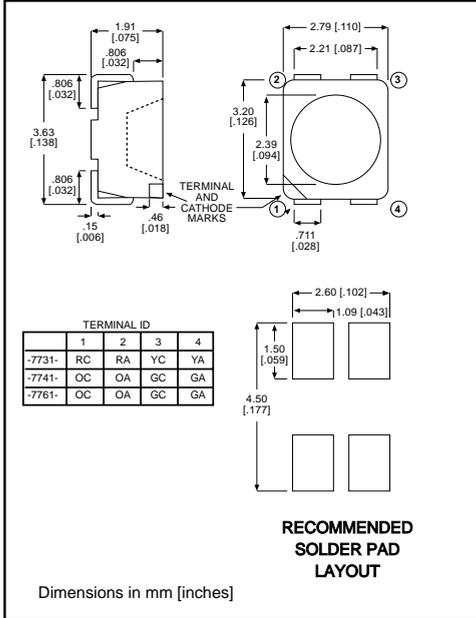

PART NO.*	COLOR
597-7731-2xx	Red/Yellow
597-7741-2xx	Orange/Green
597-7761-2xx	Orange/ Pure Green

NEW
NEW

- Features**
- Compatible with automatic placement equipment
 - Compatible with infrared reflow processes
 - Packaged on 8mm tape, 7" reels (meets EIA-RS-481-1 standard)
 - Helps to eliminate mixed technology PC board processing
 - Compatible with Dialight's Optopipe™ Series light pipes

***ORDERING INFORMATION**

597-77x1-2xx

packaging option

02	20 pieces on tape
07	7" reel, 2000 pcs/reel

ABSOLUTE MAXIMUM RATINGS (T _A =25°C)	Red/Yellow -7731	Orange/Green -7741	Orange/Pure Green -7761
Power Dissipation (mW)	100/100	100/100	100/100
Forward Current (mA)	30/30	30/30	30/30
Derating (mA/°C) From 55°C	.66/.66	.66/.66	.66/.66
Peak Current (mA) Pulse width 10 μs	500	500	500
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Profile	235°C peak 15 seconds, 185° for 90 seconds		

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T _A =25°C)	Red/Yellow -7731	Orange/Green -7741	Orange/Pure Green -7761
Luminous Intensity (mcd) I _F =10mA	Min. 2.5/2.5 Typical 7.3/6.8	4/4 8/8	2.5/2.5 5/5
Peak Wavelength (nm) λ _{Peak}	Typical 635/586	610/565	610/557
Viewing Angle (2θ ½)	Typical 120°	120°	120°
Forward Voltage (V) I _F =10mA	Typical 2/2 Max. 2.6/2.6	2/2 2.6/2.6	2/2 2.6/2.6
Reverse Voltage (V), I _R =10μA	Min. 5	5	5

θ^{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity