


查询"EC1SB-48S33"供应商

查询"ECISB-48S33"供应商

ECISB

S E R I E S

13.2 -15 WATT OPEN FRAME DC-DC CONVERTERS

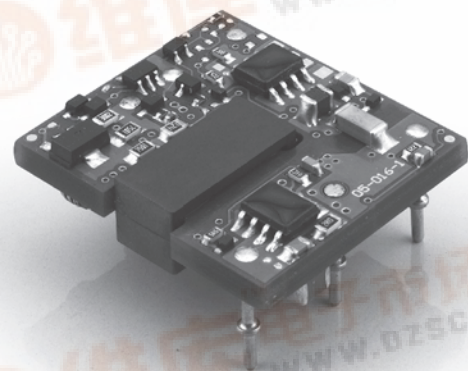

Features

- 13.2-15W Isolated Output
- 1.1" x 1" Open Frame Design
- Regulated Outputs
- Efficiency to 89%
- 2250VDC Isolation
- Input Under Voltage Protection
- Over Current Protection
- Continuous Short Circuit Protection
- Remote On/Off Control

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	SIZE
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC1SB -24S33	18-36 VDC	3.3 VDC	0 mA	4000 mA	50 mA	639mA	86	1.1" x 1"
EC1SB -24S05		5 VDC		3000 mA	50 mA	718mA	87	
EC1SB -24S12		12 VDC		1250 mA	40 mA	718mA	87	
EC1SB -24S15		15 VDC		1000 mA	40 mA	718mA	87	
EC1SB -48S33	36-75 VDC	3.3 VDC	0 mA	4000 mA	30 mA	320mA	86	1.1" x 1"
EC1SB -48S05		5 VDC		3000 mA	30 mA	359mA	87	
EC1SB -48S12		12 VDC		1250 mA	30 mA	351mA	89	
EC1SB -48S15		15 VDC		1000 mA	30 mA	351mA	89	

NOTE: 1. Nominal Input Voltage 24 or 48VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range	24V	18-36V
	48V	36-75V
Undervoltage lockout	24Vin power up	17V
	24Vin power down	16V
	48Vin power up	34V
	48Vin power down	32.5V
Input Filter	Capacitive Type	
Positive Logic Remote on/off Control :		
Logic Compatibility	CMOS or Open Collector TTL	
Module ON	>+5.5VDC or Open Circuit	
Module OFF	<1.2VDC	


OUTPUT SPECIFICATIONS:

Voltage Accuracy.....	±1.5% max.
Transient Response :25% Step Load Change.....	<500µ sec.
Ripple and Noise, 20MHz BW	Vo=3.3 & 5V75mV p-p max.
	Vo=12 & 15V100mV p-p max.
Temperature Coefficient.....	±0.03%/C max.
Short Circuit Protection.....	Continuous
Line Regulation¹.....	±0.2% max.
Load Regulation².....	±0.2% max.
Over Voltage Protection.....	Zener or TVS Clamp
External Trim Adj. Range.....	±10%
Current Limit.....	110% - 140% Nominal Output

GENERAL SPECIFICATIONS:


Efficiency.....	See Table
Isolation Voltage.....	2250 VDC min.
Isolation Resistance	10 ⁹ Ohms min.
Switching Frequency	400KHz Typ.
Operating Ambient Temperature Range.....	-40°C to +85°C
Derating, Above 71°C	Linearly to Zero Power at +100°C
Cooling.....	Natural Convection
Storage Temperature Range	-40°C to +125°C
Dimensions.....	1.10 x 0.96 x 0.36 inches (27.9 x 24.4 x 9.1 mm)
Structure.....	Non-Potted, Open Frame Type
Weight.....	8.8g

EC1SB Series Derating Curve

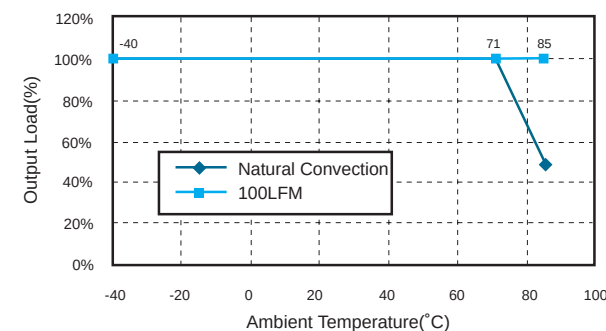

External Output Trimming

Output may optionally be externally trimmed ($\pm 10\%$) with a fixed resistor or an external trimpot as shown.



NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to min. Load
3. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF
 Module ON.....<1.2VDC
 Module OFF.....>+5.5VDC or Open Circuit
4. Suffix "S" to the Model Number with SMD Package
5. The Output Ripple and Noise is Measured with 10uF Tantalum and 1uF Ceramic Capacitor Across Output.


PIN CONNECTION

<i>Pin</i>	<i>Function</i>
1	+V Input
2	-V Input
3	+V Output
4	Trim
5	-V Output
6	Remote ON/OFF


SIZE SB

All Dimensions In Inches(mm)
Tolerance Inches: .xx= ±.04, .xxx= ±.010
 Millimeters: .xx= ±1.0, .xxx= ±0.25

THROUGH-HOLE PACKAGE

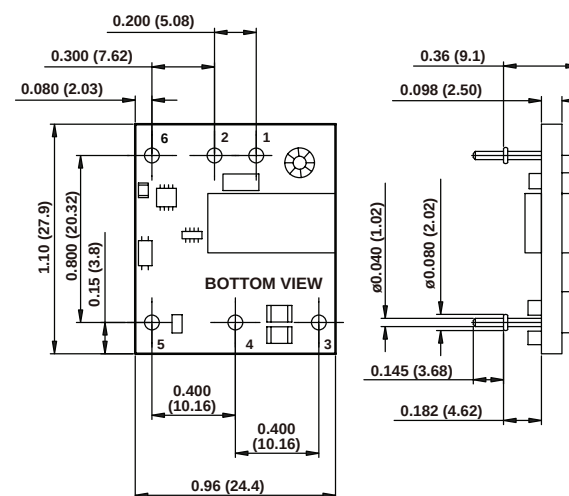

SMD-PACKAGE

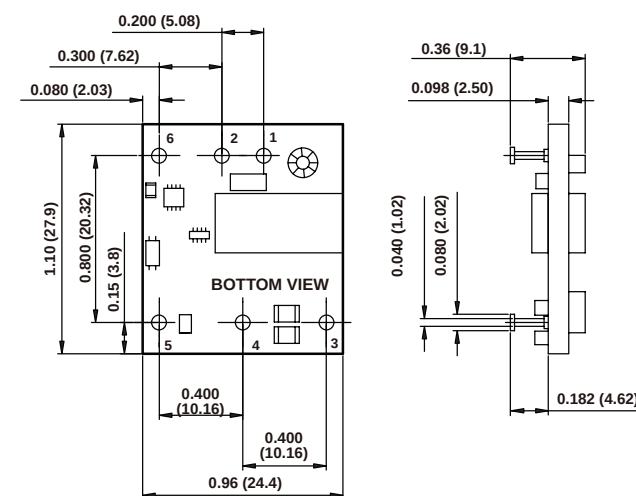

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.