

54AC11175, 74AC11175 QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR

D3388, DECEMBER 1989 – REVISED APRIL 1993

查询"54AC11175FK"供应商


- Applications Include: Buffer/Storage Registers, Shift Registers, Pattern Generators
- Flow-Through Architecture Optimizes PCB Layout
- Center-Pin V_{CC} and GND Configurations Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1- μ m Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic Small-Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs

description


These positive-edge-triggered flipflops implement D-type flip-flop logic with a direct clear input. Information at the D inputs that meets the setup time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock input is at either the high or low level, the D input signal has no effect at the output.

The 54AC11175 is characterized for operation over the full military temperature range of -55°C to 125°C . The 74AC11175 is characterized for operation from -40°C to 85°C .

54AC11175 ... J PACKAGE
74AC11175 ... DW or N PACKAGE
(TOP VIEW)



54AC11014 ... FK PACKAGE
(TOP VIEW)



FUNCTION TABLE
(each flip-flop)

INPUTS			OUTPUTS	
CLR	CLK	D	Q	\bar{Q}
L	X	X	L	H
H	↑	H	H	L
H	↑	L	L	H
H	L	X	Q_0	\bar{Q}_0

EPIC is a trademark of Texas Instruments Incorporated.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 855303 • DALLAS, TEXAS 75265

Copyright © 1993, Texas Instruments Incorporated


8961723 0094435 584

2-223

54AC11175, 74AC11175
QUADRUPLE D-TYPE FLIP-FLOPS
WITH CLEAR


D3388, DECEMBER 1989 (REVISED APRIL 1993) 德州仪器公司代理商

logic symbol†

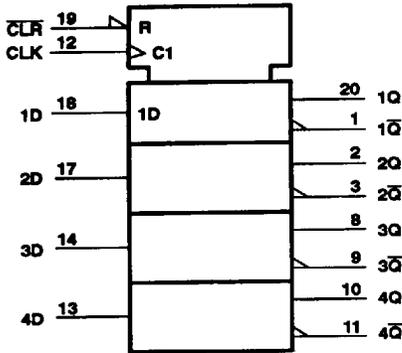

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the DW, J and N packages.

logic diagram (positive logic)

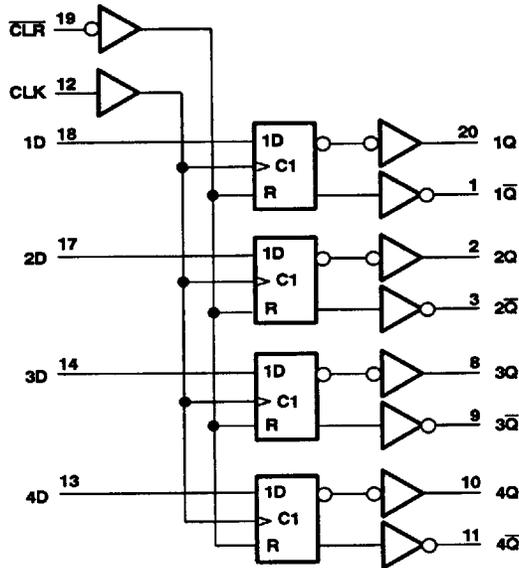

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage range, V_{CC}	-0.5 V to 7 V
Input voltage range, V_I (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 50 mA
Continuous current through V_{CC} or GND	± 200 mA
Storage temperature range	-65°C to 150°C

‡Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

8961723 0094436 410



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

54AC11175, 74AC11175
 QUADRUPLE D-TYPE FLIP-FLOPS
 WITH CLEAR

D3388, DECEMBER 1989 - REVISED APRIL 1993

查询"54AC11175FK"供应商

recommended operating conditions

		54AC11175			74AC11175			UNIT	
		MIN	NOM	MAX	MIN	NOM	MAX		
V _{CC}	Supply voltage	3	5	5.5	3	5	5.5	V	
V _{IH}	High-level input voltage	V _{CC} = 3 V	2.1			2.1			V
		V _{CC} = 4.5 V	3.15			3.15			
		V _{CC} = 5.5 V	3.85			3.85			
V _{IL}	Low-level input voltage	V _{CC} = 3 V				0.9			V
		V _{CC} = 4.5 V				1.35			
		V _{CC} = 5.5 V				1.65			
I _{OH}	High-level output current	V _{CC} = 3 V				-4			mA
		V _{CC} = 4.5 V				-24			
		V _{CC} = 5.5 V				-24			
I _{OL}	Low-level output current	V _{CC} = 3 V				12			mA
		V _{CC} = 4.5 V				24			
		V _{CC} = 5.5 V				24			
V _I	Input voltage	0	V _{CC}			0	V _{CC}		V
V _O	Output voltage	0	V _{CC}			0	V _{CC}		V
Δt/Δv	Input transition rise or fall rate	0	10			0	10		ns/V
T _A	Operating free-air temperature	-55	125			-40	85		°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			54AC11175		74AC11175		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	I _{OH} = -50 μA	3 V	2.9			2.9		2.9		V
		4.5 V	4.4			4.4		4.4		
		5.5 V	5.4			5.4		5.4		
	I _{OH} = -4 mA	3 V	2.58			2.4		2.48		
		4.5 V	3.94			3.7		3.8		
		5.5 V	4.94			4.7		4.8		
I _{OH} = -50 mA†	5.5 V				3.85					
	5.5 V						3.85			
V _{OL}	I _{OL} = 50 μA	3 V	0.1			0.1		0.1		V
		4.5 V	0.1			0.1		0.1		
		5.5 V	0.1			0.1		0.1		
	I _{OL} = 12 mA	3 V	0.36			0.5		0.44		
		4.5 V	0.36			0.5		0.44		
		5.5 V	0.36			0.5		0.44		
I _{OL} = 50 mA	5.5 V				1.65					
	5.5 V						1.65			
I _I	V _I = V _{CC} or GND	5.5 V	±0.1			±1		±1		μA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	5.5 V	8			160		80		μA
C _i	V _I = V _{CC} or GND	5 V	4							pF

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-225

8961723 0094437 357

**54AC11175, 74AC11175
 QUADRUPLE D-TYPE FLIP-FLOPS
 WITH CLEAR**

D3398, DECEMBER 1989, REVISED APRIL 1993
 54AC11175, 74AC11175 供应商

timing requirements over recommended operating free-air temperature range, $V_{CC} = 3.3 V \pm 0.3 V$ (unless otherwise noted) (see Figure 1)

		$T_A = 25^\circ C$		54AC11175		74AC11175		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
f_{clock}	Clock frequency	0	90	0	90	0	90	MHz
t_w	Pulse duration	\overline{CLR} low	5.5	5.5	5.5	5.5	5.5	ns
		CLK high or low	5.5	5.5	5.5	5.5		
t_{su}	Setup time before CLK \uparrow	Data	8	8	8	8	ns	
		\overline{CLR} inactive	8	8	8	8		
t_h	Hold time, data after CLK \uparrow	0.5	0.5	0.5	0.5	0.5	ns	

timing requirements over recommended operating free-air temperature range, $V_{CC} = 5 V \pm 0.5 V$ (unless otherwise noted) (see Figure 1)

		$T_A = 25^\circ C$		54AC11175		74AC11175		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
f_{clock}	Clock frequency	0	125	0	125	0	125	MHz
t_w	Pulse duration	\overline{CLR} low	4	4	4	4	ns	
		CLK high or low	4	4	4	4		
t_{su}	Setup time before CLK \uparrow	Data	5.5	5.5	5.5	5.5	ns	
		\overline{CLR} inactive	5.5	5.5	5.5	5.5		
t_h	Hold time, data after CLK \uparrow	0.5	0.5	0.5	0.5	0.5	ns	

switching characteristics over recommended operating free-air temperature range, $V_{CC} = 3.3 V \pm 0.3 V$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ C$			54AC11175		74AC11175		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f_{max}			90	120		90		90	MHz	
t_{PLH}	\overline{CLR}	Any Q	2.6	7	8.7	2.6	9.9	2.6	9.3	ns
		Any \overline{Q}	2.6	7	8.7	2.6	9.9	2.6	9.3	
t_{PHL}	\overline{CLR}	Any Q	2.5	10	11.6	2.5	13	2.5	12.4	ns
		Any \overline{Q}	2.5	10	11.6	2.5	13	2.5	12.4	
t_{PLH}	CLK	Any Q	2.4	6.8	8.7	2.4	9.4	2.4	9.1	ns
		Any \overline{Q}	2.4	6.8	8.7	2.4	9.4	2.4	9.1	
t_{PHL}	CLK	Any Q	1.7	9.4	11.7	1.7	13	1.7	12.5	ns
		Any \overline{Q}	1.7	9.4	11.7	1.7	13	1.7	12.5	

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



54AC11175, 74AC11175
 QUADRUPLE D-TYPE FLIP-FLOPS
 WITH CLEAR

D3388, DECEMBER 1989 - REVISED APRIL 1993

查询“54AC11175FK”供应商


switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11175		74AC11175		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f_{max}			125	150		125		125		MHZ
t_{PLH}	$\overline{\text{CLR}}$	Any Q	2.2	4.5	6.3	2.2		2.2	6.8	ns
		Any $\overline{\text{Q}}$	2.2	4.5	6.3	2.2	1.1	2.2	6.8	
t_{PHL}	$\overline{\text{CLR}}$	Any Q	2.4	6.7	8.5	2.4	9.7	2.4	9.3	ns
		Any $\overline{\text{Q}}$	2.4	6.7	8.5	2.4	9.7	2.4	9.3	
t_{PLH}	CLK	Any Q	2.2	4.5	6.3		7.2	2.2	6.9	ns
		Any $\overline{\text{Q}}$	2.2	4.5	6.3	2.2	7.2	2.2	6.9	
t_{PHL}	CLK	Any Q	1.9	6.4	8.5	1.9	9.7	1.9	9.3	ns
		Any $\overline{\text{Q}}$	1.9	6.4	8.5	1.9	9.7	1.9	9.3	

operating characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd} Power dissipation capacitance	$C_L = 50\text{ pF}$, $f = 1\text{ MHz}$	48	pF

PARAMETER MEASUREMENT INFORMATION

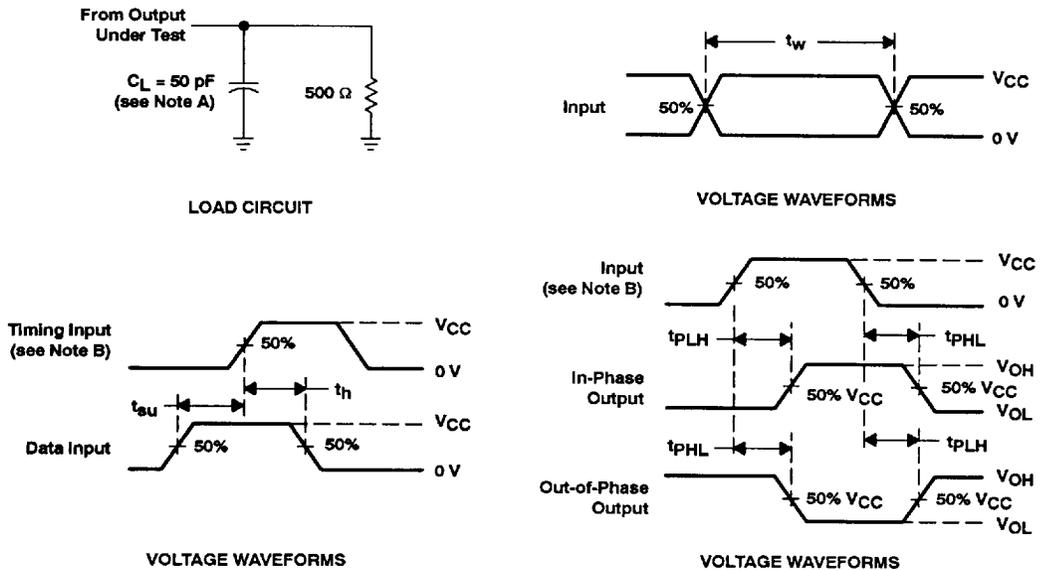

NOTES: A. C_L includes probe and jig capacitance.

B. All input pulses are supplied by generators having the following characteristics: PRR $\leq 10\text{ MHz}$, $Z_O = 50\ \Omega$, $t_r = 3\text{ ns}$, $t_f = 3\text{ ns}$.

C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.

TEXAS
 INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-227

8961723 0094439 12T