


High Power 1550 nm DFB Laser

查询"1711A"供应商



Model 1710A/B, 1711A/B

DATA SHEET

The 1710A/B and 1711A/B modules are high power 1550 nm laser devices in a 14 pin butterfly package with a thermoelectric cooler and monitor photodiode. The laser is designed to be used in conjunction with commercially available external modulators for high performance analog and digital applications. Ortel offers modules with 25 mW or 30 mW output power into polarization preserving fiber. Model 1710A/B operates with positive laser bias and Model 1711A/B operates with negative bias.

- High Fiber Coupled Power: 25 mW and 30 mW
- Narrow Linewidth: <3 MHz
- Low Relative Intensity Noise: <-162 dB/Hz
- Coupled to Polarization Preserving Fiber
- ISO 9001 Certified

Laser Parameter *	Sym.	Conditions	Min.	Max.	Unit
Output Power -A	P _O	-	25	-	mW
-B	P _O	-	30	-	mW
Center Wavelength	λ_c	I _{OP}	1540	1560	nm
Linewidth (FWHM)	$\Delta\nu$	I _{OP}	-	3	MHz
Side-mode Suppression Ratio	SMSR	I _{OP}	30	-	dB
Relative Intensity Noise	RIN	I _{OP} , 40 to 860MHz	-	-162	dB/Hz
Operating Current	I _{OP}	-	-	250	mA
Threshold Current	I _{TH}	-	-	25	mA
Forward Voltage	V _F	-	-	2.5	V
Optical Isolation	-	-20 to +65°C	30	-	dB
Polarization Extinction Ratio	T _E /T _M	From fiber end, I _{OP}	20	-	dB


* measured at 25°C Laser Temperature

Fiber Characteristics

Type	Fujikura PANDA, 900 μ m jacket
Fiber Length	1 ~ 2 m

Ordering Information


1710A	25 mW; pos. laser bias
1710B	30 mW; pos. laser bias
1711A	25 mW; neg. laser bias
1711B	30 mW; neg. laser bias

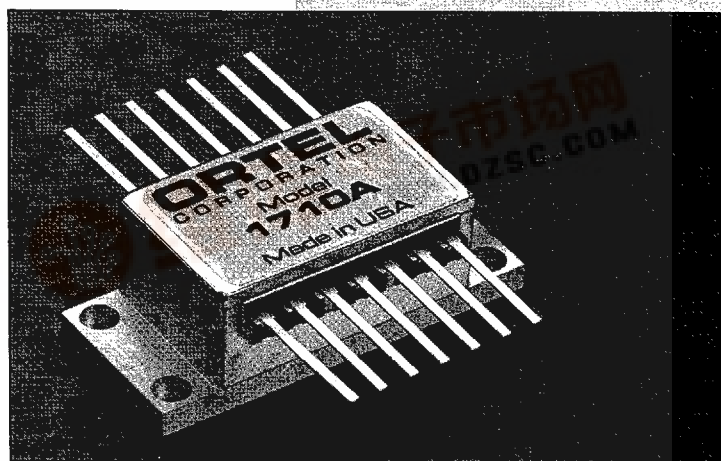

ORTEL
CORPORATION

6817895 0000859 016






6817895 0000860 838

High Power 1550 nm DFB Laser

查询"1711A"供应商

Monitor Photodiode	Sym.	Conditions	Min.	Max.	Unit
Reverse Voltage	V _{RMPD}	I _{op}	-	10	V
Monitor Current	I _{MPD}	-	40	1800	μA
Thermal					
TEC Current	I _{TEC}	ΔT = 40°C	-	1.8	A
TEC Voltage	V _{TEC}	ΔT = 40°C	-	2.2	V
Thermistor Resistance	R _{TH}	-	9.5	10.5	KΩ

Absolute Maximum Ratings			
Parameter	Min.	Max.	Units
Operating Temperature Range	-20	+65	°C
Storage Temperature Range	-40	+70	°C
Forward Current (Laser)	-	275	mA
Reverse Voltage (Laser)	-	2.0	V
Photodiode Reverse Voltage	-	10	V
TEC Voltage	-	2.2	V
TEC Current	-	2.0	A

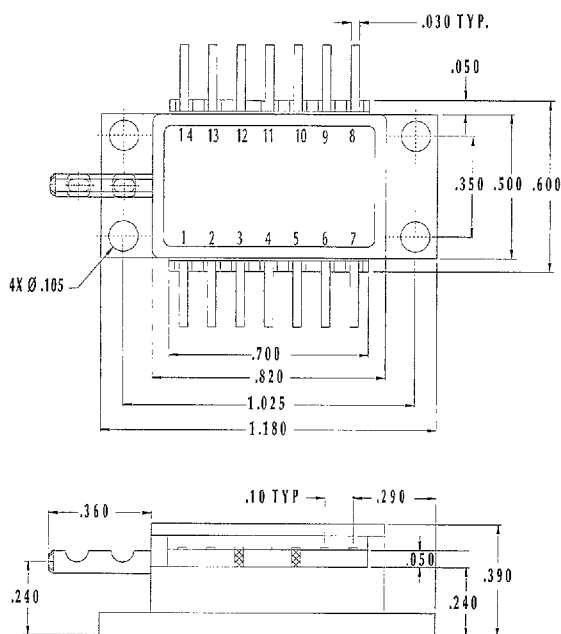

Pin	Assignments	
Pin	1710A/B (positive bias)	1711A/B (negative bias)
1	TE Cooler (+)	TE Cooler (+)
2	NC	NC
3	Case Ground	Case Ground
4	NC	Laser Cathode
5	Laser Cathode, Case Ground	Laser Anode, Case Ground
6	Laser Anode	NC
7	Photodiode Cathode	Photodiode Cathode
8	Photodiode Anode	Photodiode Anode
9	Laser Anode	Laser Cathode
10	Case Ground	Case Ground
11	Thermistor	Thermistor
12	Case Ground	Case Ground
13	NC	NC
14	TE Cooler (-)	TE Cooler (-)

Dimensions are in inches

Information contained herein is deemed to be reliable and accurate as of issue date. No responsibility is assumed for its use, nor for any infringements on the rights of others. Ortel Corporation reserves the right to change the design or specifications of the product at any time without notice. Ortel Corporation offers the products described herein with a one year warranty on material and workmanship. Ortel Corporation will repair or replace any product or part thereof which proves defective within one year of shipment. For a complete copy of our warranty policy, please contact Ortel Corporation.

Safety Considerations - The light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber pigtail or into the collimated beam along its axis when the device is in operation. Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard.

CORPORATE HEADQUARTERS ORTEL CORPORATION

2015 West Chestnut Street
Alhambra, California USA 91803
(800) 362-3891 (818) 281-3636
Fax (818) 281-8231
email: mtkge-a@ortel.com

**ORTEL**
CORPORATION

SUBSIDIARIES

Germany
Ortel VERTRIEBS GmbH Ortel SARL
49-89-3195041
Fax 49-89-3194253

Spain, Portugal
& Southern France
Ortel SARL
33-4-67-30-84-48
Fax 33-4-67-30-84-82

France, Belgium
& The Netherlands
Ortel SARL
331-69-321127
Fax 331-69-321137

