




查询"132J30019X"供应商

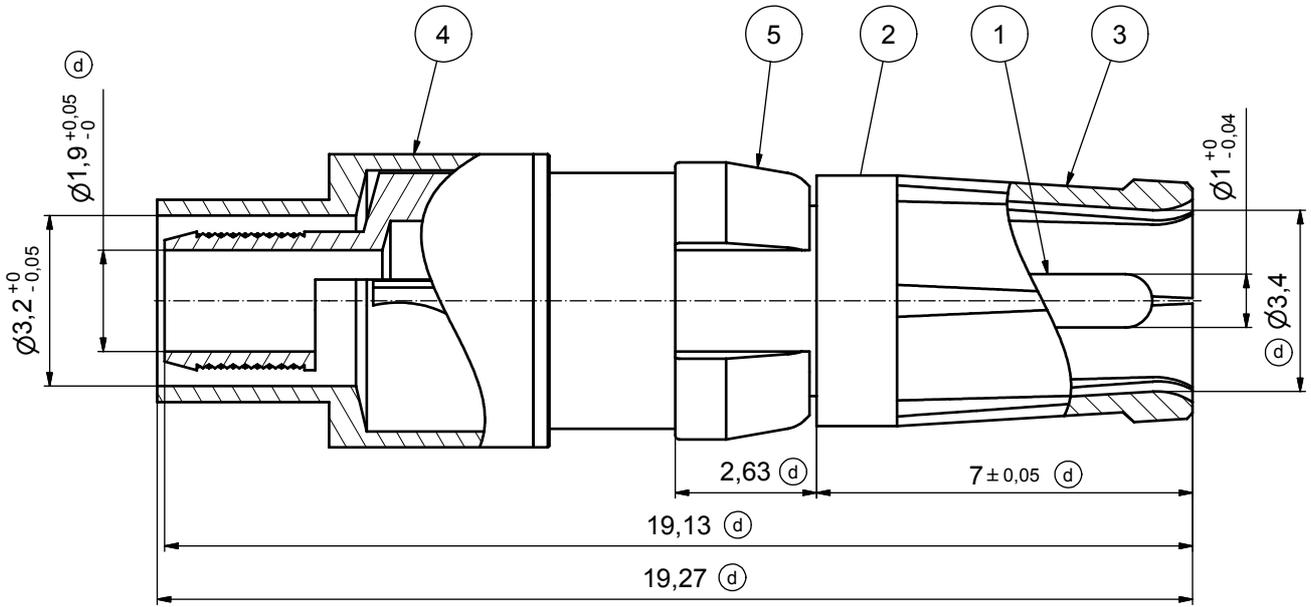

(d)
 INNER CONDUCTOR: SOLDERED
 OUTER CONDUCTOR: CRIMPED
 HANDCRIMP TOOL: 360X10519X
 TOOL INSERT: 360X11019X
 INSERT CAVITY B: HEX 3.25/.128

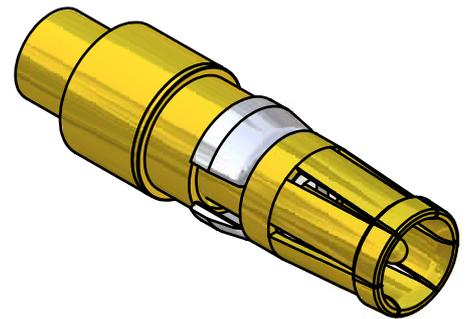

STRIPPING DIMENSIONS (d)

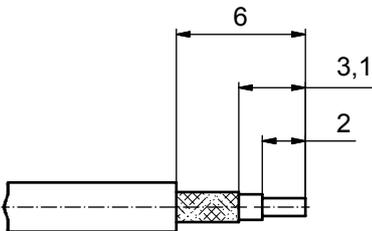

Directive 2002/95/EC
 "RoHS"
 Compliant

5	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
4	1	FERRULE	COPPER ALLOY	GOLD over NICKEL
3	1	BODY	COPPER ALLOY	GOLD over NICKEL
2	1	DIELECTRIC	PTFE	-
1	1	CENTER CONTACT	COPPER ALLOY	GOLD over NICKEL
item	quantity	part description	material	plating

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH		DO NOT ALTER CAD DRAWING BY HAND		tolerance ISO 2768-m		scale: 10.1
				date	name	material: see partlist
				drawn	29.10.99	Mickenbecker
				appd.	02.11.99	Barcinski
10 x d	Ä 2925	12.02.08	HS	norm	title: (c) COAXIAL CONTACT SOCKET 75 OHM inner conductor for solder termination outer conductor for crimp termination	
1 x c	Ä 2535	18.07.06	Lehmen	d-old	dwg no:	Inventor 10 (d) DIN-A3
"b"	Ä 1077	30.11.99	Mick	13K2IU7B		
a	Origin			sh: 1		
rev.	description	date	name	part no: 132J30019X		

