



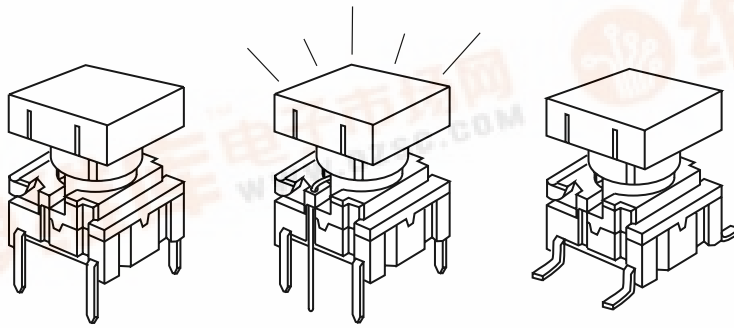


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -55/+115°C
high temp: -40/+160°C


Dimensions (through-hole)

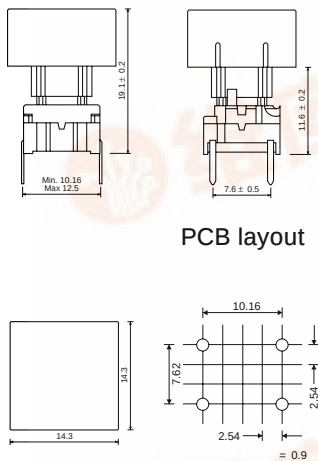


Dimensions (w/LED)

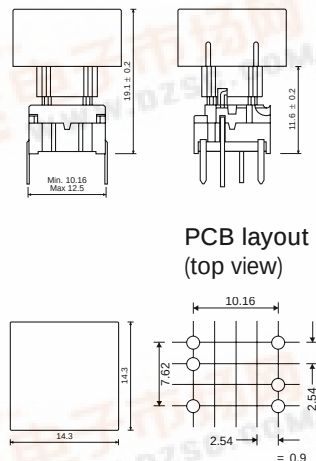

Dimensions (SMD)

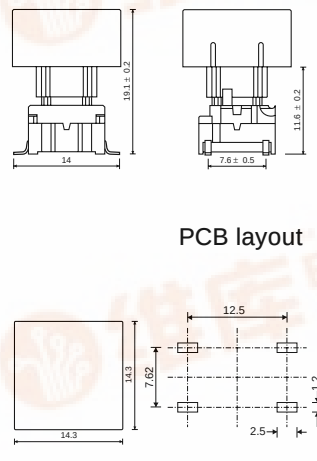

Dimensions (Bezel) (Optional)

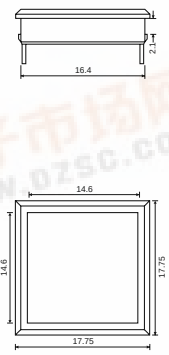

HOW TO ORDER

3 F	☐	☐	+	1 K	1 6	+	2 K	
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black		Bezel	03 grey 06 white 08 red 09 black

Standard versions:

3FTL6
3FTH9
3FSH9

3 F	T	☐	+	1 K 1 1 1 6	+	2 K	
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap transparent		Bezel	03 grey 06 white 08 red 09 black

Standard versions:

3FTL622
3FTL644
3FTL688

Ordering example: 3FTL688 + 1K1116

MEC - Industriparken 23 - PO. BOX 26 - DK-2750 Ballerup - Denmark

Tel.: +45 44 97 33 66 - Fax: +45 44 68 15 14 - Web: <http://www.mec.dk> - E-mail: danmec@mec.dk

