


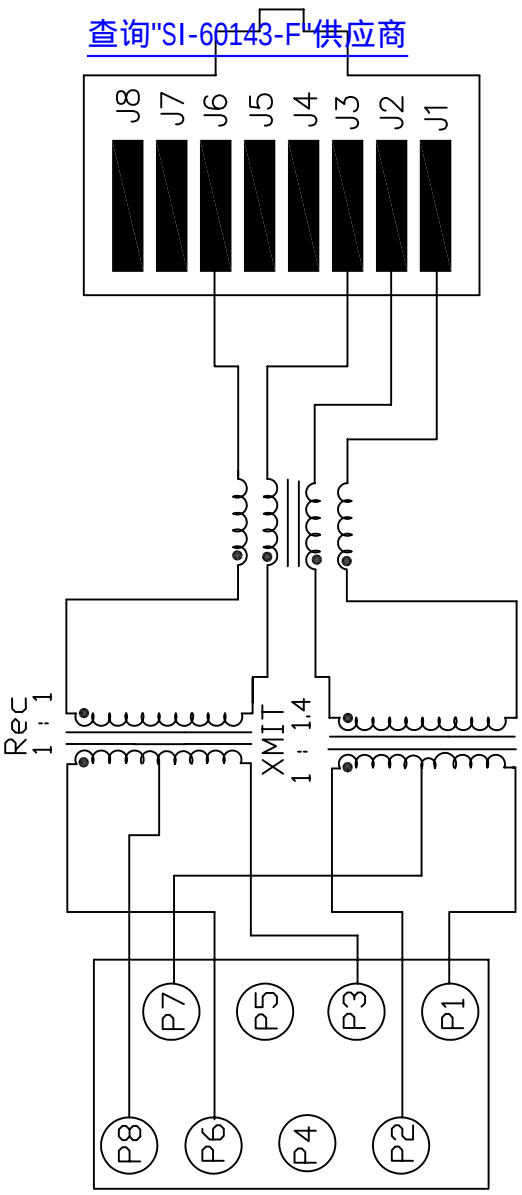


查询"SI-60143-F"供应商



ELECTRICAL SPECIFICATIONS:

1.0	Turns Ratio	$\langle P6-P8-P3 \rangle : \langle J6-J3 \rangle$ $\langle P2-P7-P1 \rangle : \langle J2-J1 \rangle$	Notes: : 1CT : 1 $\pm$ 3% : 1CT : 1.4 $\pm$ 3% : 200uH MIN. @ 0.01V, 10KHz : 100uH MIN. @ 0.01V, 10KHz : 0.3uH MAX. @ 1MHz : 0.3uH MAX. @ 1MHz : 20pf MAX @ 1MHz : 20pf MAX. @ 1MHz
2.0	Inductance	$\langle P6-P3 \rangle = \langle J6-J3 \rangle$ $\langle P2-P1 \rangle$	
3.0	Leakage Inductance	$P6-P3$ (WITH $J6$ AND $J3$ SHORT) $P2-P1$ (WITH $J2$ AND $J1$ SHORT)	
4.0	Interwinding Capacitance	$\langle P6,P3 \rangle$ TO $\langle J6,J3 \rangle$ $\langle P2,P1 \rangle$ TO $\langle J2,J1 \rangle$	
5.0	DC Resistance	$\langle J6-J3 \rangle = \langle J2-J1 \rangle$ $\langle P6-P8 \rangle = \langle P8-P3 \rangle$ $\langle P2-P7 \rangle = \langle P7-P1 \rangle$	
6.0	Dielectric Withstand	$\langle P6,P3 \rangle$ TO $\langle J6,J3 \rangle$ $\langle P2,P1 \rangle$ TO $\langle J2,J1 \rangle$	


NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTIONS ARE OMITTED.





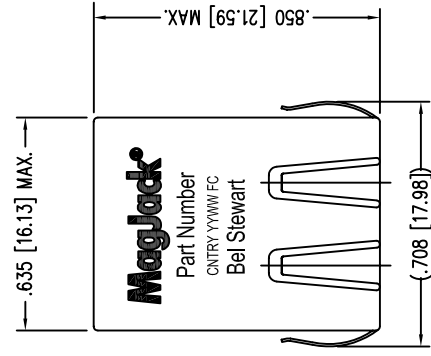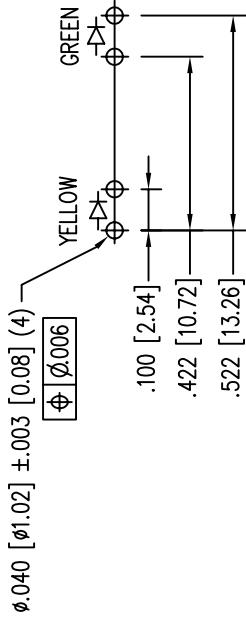


LED POLARITY
(ENLARGED VIEW)



SINGLE COLOR LED

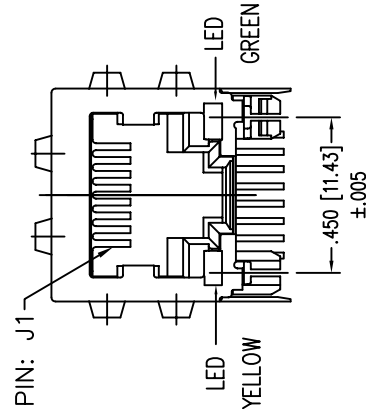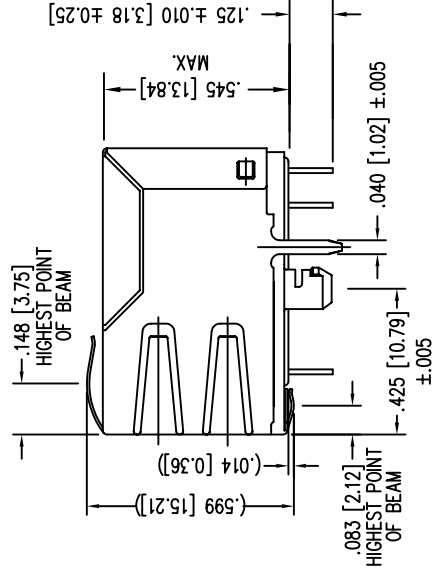

P.C.B. RECOMMENDED HOLE LAYOUT
SEEN FROM COMPONENT SIDE
ALL CENTERLINE DIMENSIONS ARE BASIC.



NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD,
50 MICRO-INCHES MIN. IN CONTACT AREA.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- REFLOW AND WAVE SOLDER COMPATIBLE -260°C FOR
10 SECONDS MAX.



LED SPECIFICATION		
STANDARD LED	WAVELENGTH	Forward V (MAX) *(TYP)
GREEN	565 nm	2.5 V 2.2 V
YELLOW	590 nm	2.5 V 2.1 V

*WITH A FORWARD CURRENT OF 20 mA (TYP)

Bel Stewart Connector
11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512
<http://www.stewartconnector.com>



THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

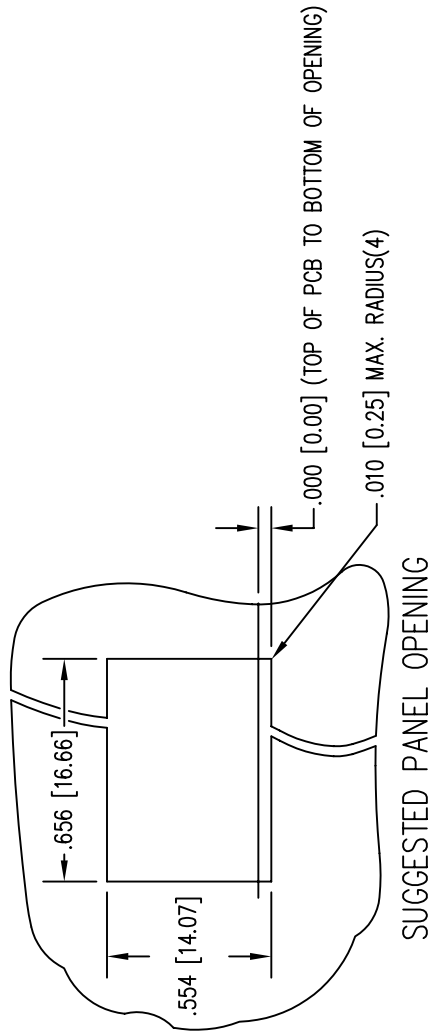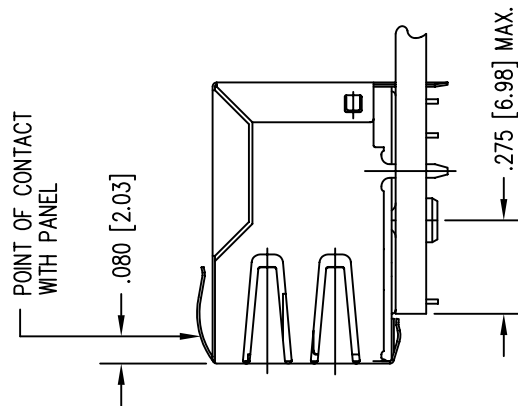

1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ± 0.005 [0.13]

Bel Stewart Connector
11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512

MagJack®

<http://www.stewartconnector.com>

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET
3 OF 3

DRAWING NO.

SI-60143-F

REV.

12