


5x20mm / No. 181

查询 1810125000 供应商



Dimensions (mm)

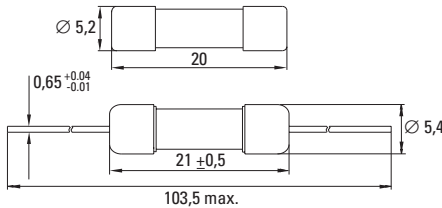

IEC 60127-2/V, 250V, T

Time-Current Characteristic

Time Lag (T)

Standard

IEC 60127-2/V

Approvals

VDE: License No. 97297/107838/102453
SEMCO: Certificate No. 9847163
cULus Recognized: File No. E 67006
BSI: License No. KM 7850/37421
IMQ: Certificate No. EA262/EN298
SEV: Certificate No. 9477082800
MITI: File No. 32-1890
CCEE: Certificate No. CH0026526-98/CH0035863-99

Features

High breaking capacity
Direct solderable or plug-in versions
Internationally approved
Worldwide availability

WebLinks

Data Sheet

www.wickmann.com/products/181.pdf

Approval Certificates

www.wickmann.com/approvals

Time-Current Curve

www.wickmann.com/itcurves

Packaging

www.wickmann.com/pack

Specifications

Packaging

000: Bulk (1000 pcs.)
002: Bulk (10 pcs.)
040: Axial Leads - Bulk (1000 pcs.)
043: Axial Leads - Tape/Reel (1250 pcs.)

Materials

Tube: Ceramic
End Caps: Nickel-plated brass
Axial Leads: Silver-plated caps
Tin-plated copper wires
(not available above 8A)

Operating Temperature

-25°C to +70°C (consider de-rating)

Climatic Category

-25°C/+70°C/21 days (EN 60068-1..3)

Stock Conditions

+10°C to +60°C
relative humidity ≤ 75% yearly average,
without dew, maximum value for 30 days-95%

Vibration Resistance

24 cycles at 15 min. each (EN 60068-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

Solderability

260°C, ≤ 3 sec. (Wave)
350°C, ≤ 1 sec. (Hand)

Soldering Heat Resistance

260°C, 10 sec. (IEC 60068-2-20)

Marking

W, T, Current Rating, H, 250V, Approvals

Unit Weight

1.2g (approx.)
2.2g (with leads)



Limits for Pre-arcing Time

Rated Current	1.5 x I _{Rated}	2.1 x I _{Rated}	2.75 x I _{Rated}	4 x I _{Rated}	10 x I _{Rated}
125 ... 800mA/8 ... 10A	> 1h	< 30 min	--	60ms ... 5s	10ms ... 100ms
1.00A ... 3.15A	> 1h	< 30 min	1s ... 80s	95ms ... 5s	10ms ... 100ms
4.00mA ... 6.30A	> 1h	< 30 min	1s ... 80s	150ms ... 5s	20ms ... 100ms

Permissible continuous operating current is ≤ 100% at ambient temperature of 23°C (73.4°F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I _{Rated} max. (mV)	Power Dissipation 1.5 x I _{Rated} max. (W)	Melting Integral 10 x I _{Rated} min. (A²s)	Approvals
125mA	0125	250V		2000	0.5	0.025	VDE
160mA	0160	250V		1550	0.6	0.035	SEMCO
200mA	0200	250V		1300	0.6	0.084	cULus
250mA	0250	250V		1000	0.7	0.11	BSI
315mA	0315	250V		900	0.8	0.19	IMQ
400mA	0400	250V		800	0.9	0.34	SEV
500mA	0500	250V		650	1.0	0.56	MITI
630mA	0630	250V		550	1.1	0.77	CCEE
800mA	0800	250V	1500A/250VAC 50-60Hz cos φ = 0.7-0.8	450	1.2	1.6	
1.00A	1100	250V		250	1.4	1.0	
1.25A	1125	250V		170	1.5	1.6	
1.60A	1160	250V		160	1.7	2.6	
2.00A	1200	250V		150	1.9	4.5	
2.50A	1250	250V		120	0.8	10	
3.15A ¹	1315	250V		110	0.9	19	
4.00A ¹	1400	250V		100	1.2	34	
5.00A ¹	1500	250V		95	1.5	66	
6.30A ¹	1630	250V		90	1.7	110	
8.00A ¹	1800	250V	1000A/250VAC/cos φ=1	90	3.6	77	
10.00A ¹	2100	250V	1000A/250VAC/cos φ=1	90	4.0	180	

¹ Depending on the application and mounting, the fuse heating at max. ambient temperature in a closed fuseholder should be considered.


² Please specify if MITI and CCEE is required when ordering.

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		181		

[查询"1810125000"供应商](#)

5x20mm/ No. 181

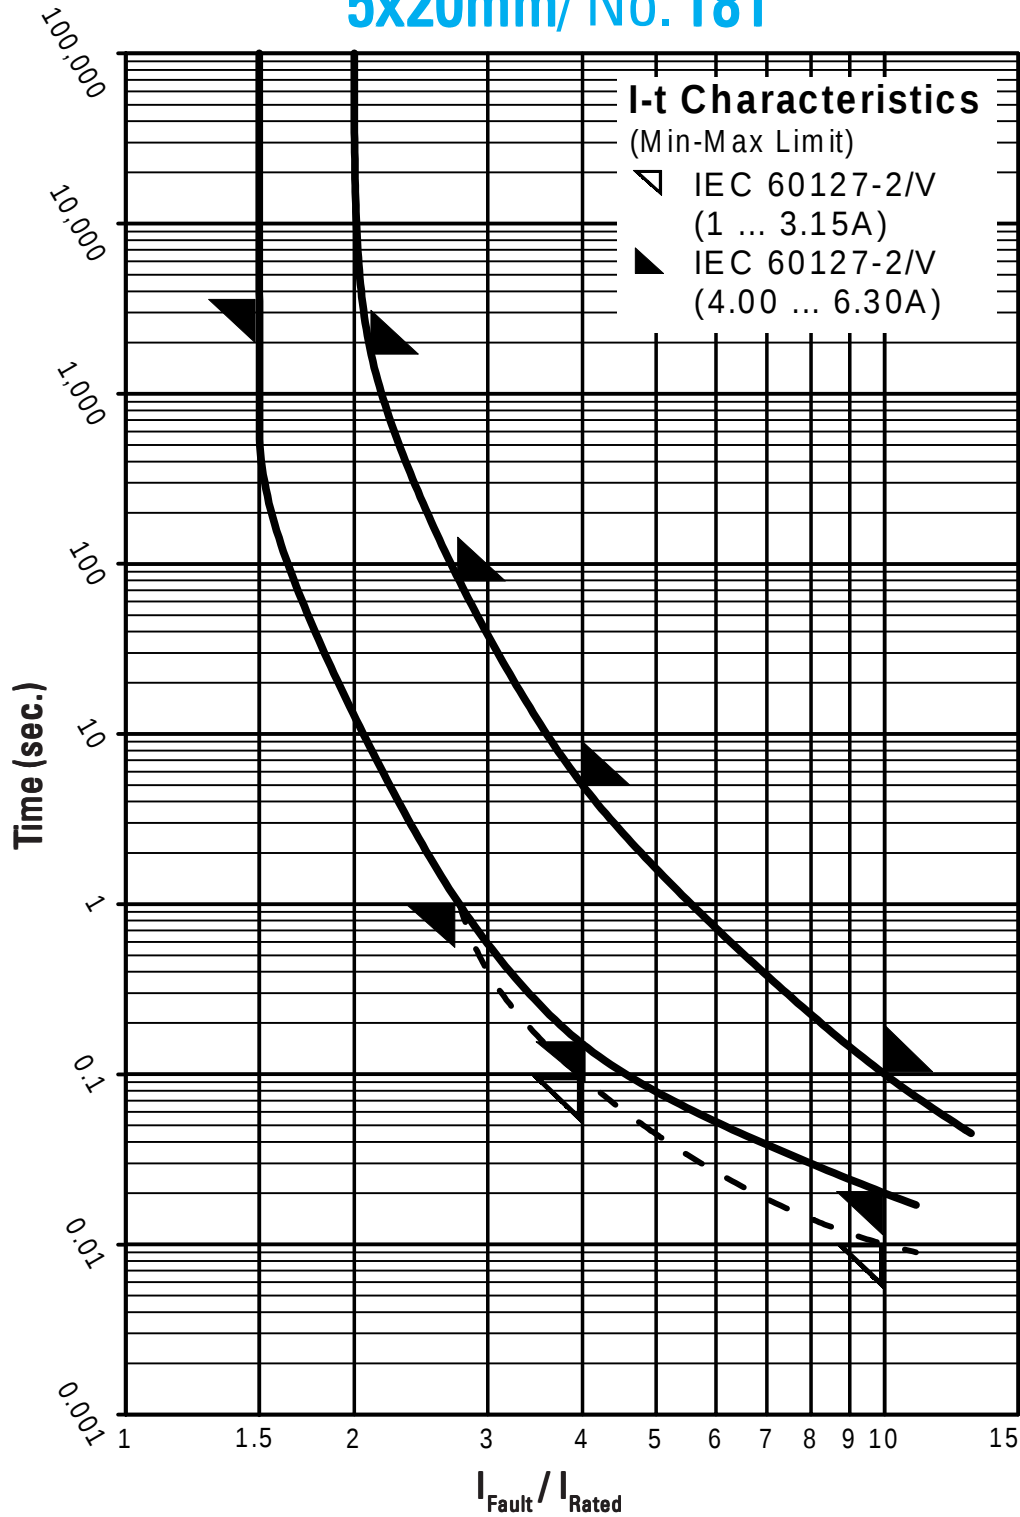

Contact WICKMANN for individual I-t curves