


[查询"SI-70022"供应商](#)

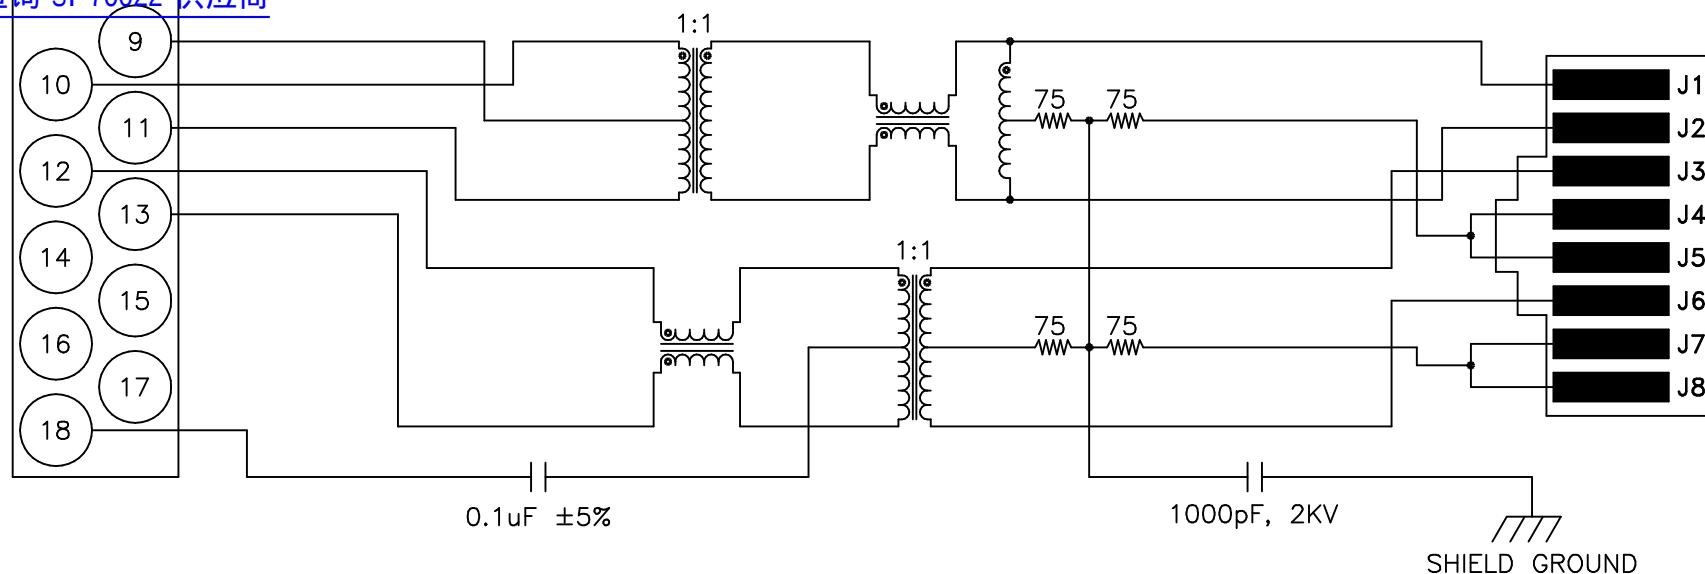

ELECTRICAL SPECIFICATIONS:

- | | | |
|-----|--|--|
| 1.0 | Turns Ratio: (P12-P18-P13) : (J3-J6) | : 1CT : 1CT ±3% |
| | (P10-P9-P11) : (J1-J2) | : 1CT : 1CT ±3% |
| 2.0 | Inductance: (P12-P13) | : 400uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| | (J1-J2) | : 400uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| 3.0 | Leakage Inductance: P12-P13 (WITH J6 AND J3 SHORT) | : 0.3uH MAX. @ 1MHz |
| | P10-P11 (WITH J2 AND J1 SHORT) | : 0.3uH MAX. @ 1MHz |
| 4.0 | Interwinding Capacitance: (P12,P13) TO (J6,J3) | : 30pf MAX @ 1MHz |
| | (P10,P9,P11) TO (J2,J1) | : 30pf MAX @ 1MHz |
| 5.0 | DC Resistance: (J6-J3)=(J2-J1) | : 1.2 ohms Max. |

 InNet Technologies, Inc. http://www.innet-tech.com	
 Stewart Connector Systems http://www.stewartconnector.com	
SHEET 1 OF 4	DRAWING NO. SI-70022
REV. X1	

[查询"SI-70022"供应商](#)

6.0 RETURN LOSS: (P10-P11)=100 OHMS AND (P12-P13)=100 OHM REF.
1MHz TO 30MHz : -20dB MIN.
30MHz TO 60MHz : $-(19-20\log(f/30\text{MHz}))$ MIN
80MHz : -12dB MIN.

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).

7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P10, P11) : 1500 RMS
(J3, J6) TO (P12,P13) : 1500 RMS

8.0 INSERTION LOSS: RS=RL=100 ohms
1MHz TO 65MHz : -1 dB MAX

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS
OUTPUT VOLTAGE = 1 V peak : 3.0 nS MAX
PULSE WIDTH= 112nS : 3.0 nS MAX

10.0 CROSS TALK: 1-65 MHz : -35 dB MIN.

11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz : -30 dB MIN
100MHz TO 130MHz : -20 dB MIN



InNet Technologies, Inc.
<http://www.innet-tech.com>







Stewart Connector Systems
<http://www.stewartconnector.com>

SHEET
2 OF 4


DRAWING NO. SI-70022 REV. X1

[查询"SI-70022"供应商](#)

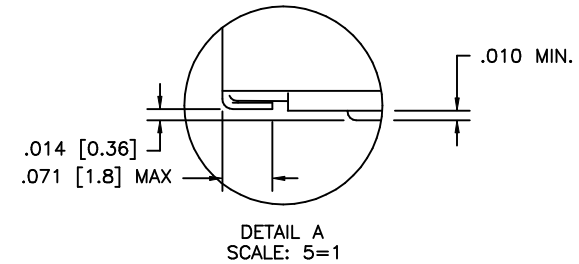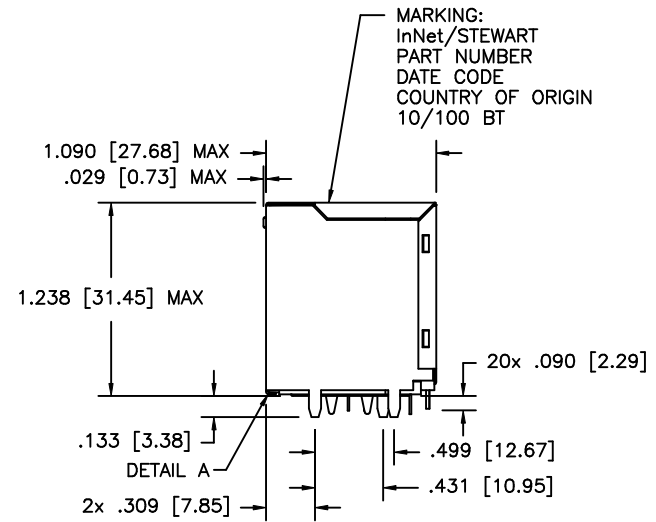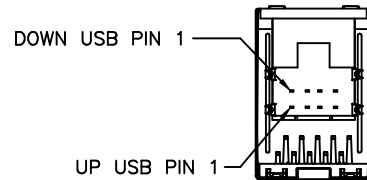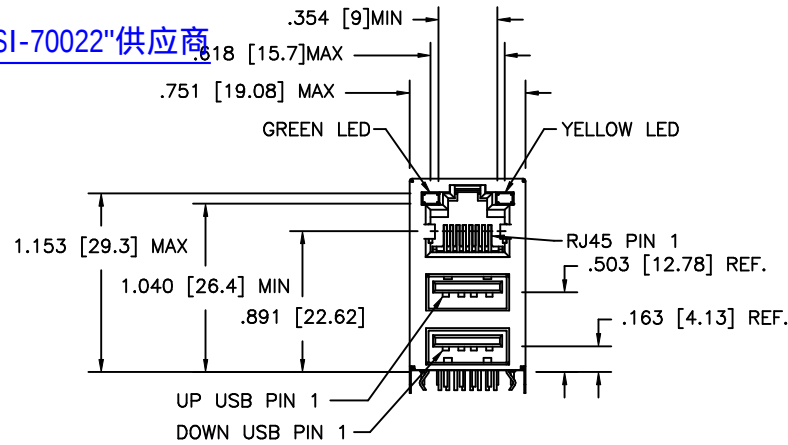

NOTES:

- 1.0 TOLERANCE COMPLY WITH FCC DIMENSION REQUIREMENTS.
- 2.0 PIN NOT ELECTRICALLY CONNECTED MAY BE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3.0 MATERIAL:
 - PLASTIC: UL94V-Ø
 - TERMINAL USB: CERTIFIED TO USB SPEC 2.0
 - TERMINAL RJ45: 50 MICROINCHES Au OVER 50 MICROINCHES Ni OVER PHOSBRONZE SHIELD, BOTH USB AND RJ45: BRASS PLATED W/EITHER Ni OR TIN-LEAD
- 4.0 GENERAL TOLERANCE: ± 0.005 [.127]
- 5.0 INSERTION FORCE RJ45: 9.0 lbs MAX
INSERTION FORCE USB: 7.7 lbs MAX
- 6.0 WITHDRAW FORCE RJ45: 2.9 lbs MIN
WITHDRAW FORCE USB: 2.2 lbs MIN
- 7.0 DURABILITY FORCE RJ45: 1000 INSERTIONS
DURABILITY FORCE USB: 1500 INSERTIONS
- 8.0 CONNECTOR TO PCB INSERTION FORCE: 8.6 lbs MAX



 InNet Technologies, Inc. http://www.innet-tech.com	
 Stewart Connector Systems http://www.stewartconnector.com	
SHEET 3 OF 4	DRAWING NO. SI-70022
REV. X4	

[查询"SI-70022"供应商](#)

