

DATA SHEET

MKT 370/371/372/373 **Metallized polyester film capacitors**


Product specification
Supersedes data of April 1999
File under BCcomponents, BC05

2001 Jun 22

Metallized polyester film capacitors MKT 370/371/372/373

MKT RADIAL POTTED TYPE

PITCH 5/7.5/10/15/22.5/27.5 mm

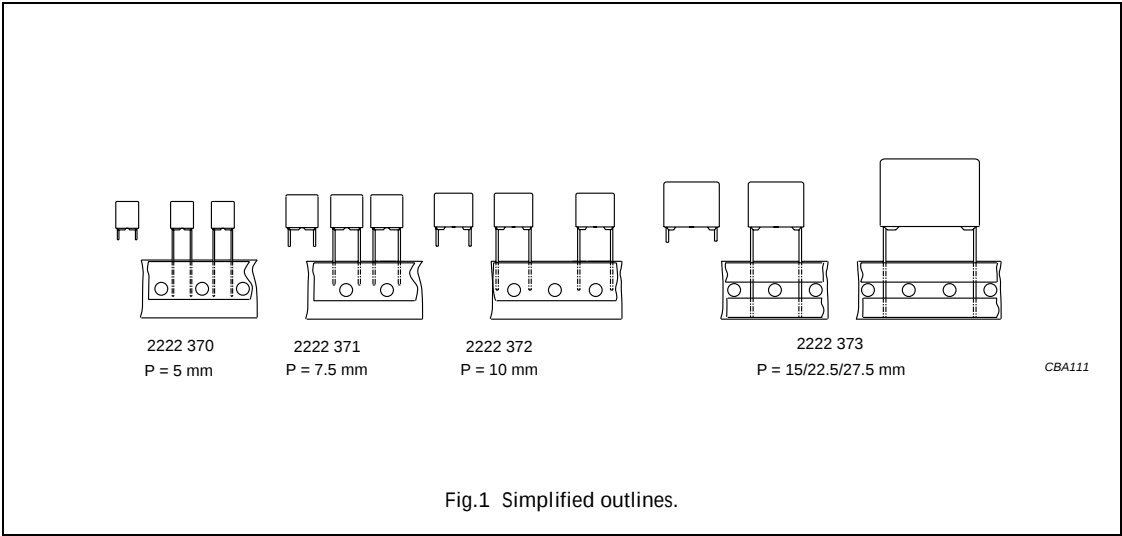

FEATURES

- Low-inductive wound cell of metallized (PETP) film
- Potted with epoxy resin in a flame-retardant case
- Radial leads of solder-coated wire
- Withstands solvents and rinsing liquids
- Small stand-off pips to allow removal of solder flux
- Suitable for high density packaging.

APPLICATIONS

- Blocking and coupling
- Bypass and energy reservoir.

DETAIL SPECIFICATION

For more detailed data and test requirements see "Type detail specification HQN-384-02/103".


QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range (E12 series)	0.001 to 15 μ F
Capacitance tolerance	$\pm 10\%$; $\pm 5\%$
Rated (DC) voltage	63 V; 100 V; 250 V; 400 V; 630 V
Rated (AC) voltage	40 V; 63 V; 160 V; 220 V; 250 V
Climatic category	55/105/56
Rated temperature	85 $^{\circ}$ C
Maximum application temperature	105 $^{\circ}$ C
Reference specification	IEC 60384-2
Performance grade	grade 1 (long life)
Materials	qualified in accordance with UL94 V-0

Metallized polyester film capacitors

MKT 370


COMPOSITION OF CATALOGUE NUMBER

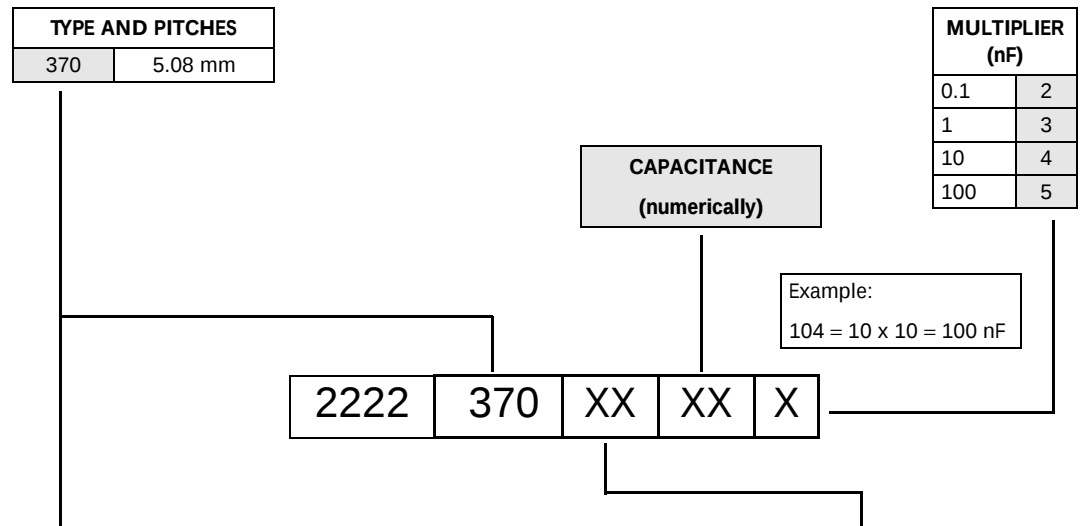

TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES				
			C-TOL	63 V	100 V	250 V	400 V
370	ammopack		±10%	75	85	35	65
			±5%	76	86	36	66
			ON REQUEST				
370	loose in box	lead length 4.0 mm	±10%	11	21	41	51
			±5%	12	22	42	52
		lead length 26.0 mm	±10%	15	25	45	55
			±5%	16	26	46	56
	taped on reel		±10%	18	28	48	58
			±5%	19	29	49	59

Metallized polyester film capacitors

MKT 371/372/373

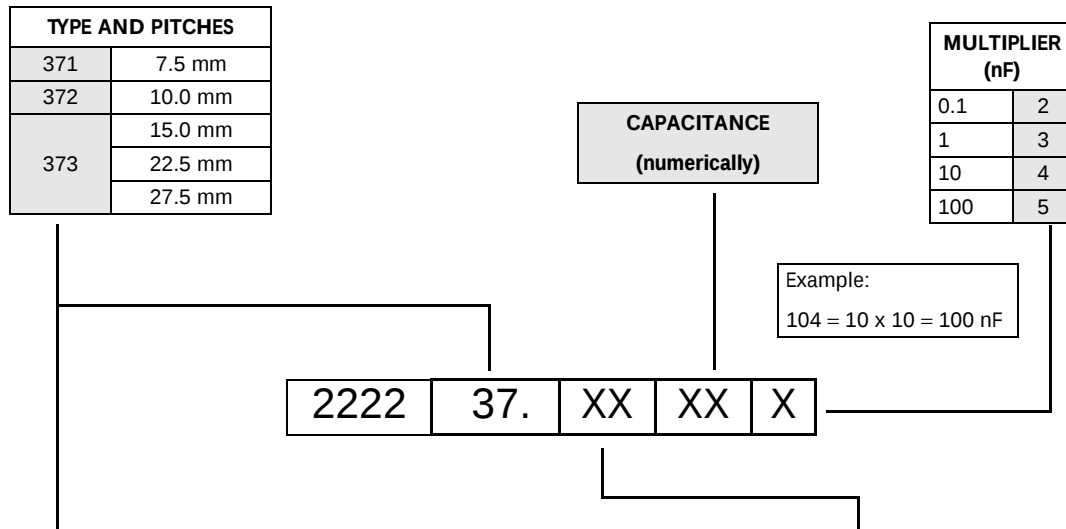


TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES					
			C-TOL	63 V	100 V	250 V	400 V	630 V
371	loose in box	lead length 4.0 mm	±10%	11	21	41	51	—
			±5%	12	22	42	52	—
	ammopack		±10%	38	68	78	88	—
			±5%	39	69	79	89	—
372	loose in box	lead length 4.0 mm	±10%	—	21	41	51	61
373	loose in box	lead length 5.0 mm	±10%	—	23	43	53	63
			ON REQUEST					
371	loose in box	lead length 26.0 mm	±10%	15	25	45	55	—
			±5%	16	26	46	56	—
	taped on reel		±10%	35	65	75	85	—
			±5%	36	66	76	86	—
372	loose in box	lead length 4.0 mm	±5%	—	22	42	52	62
	taped on reel		±10%	—	25	45	55	65
			±5%	—	26	46	56	66
	ammopack		±10%	—	28	48	58	68
			±5%	—	29	49	59	69
373	loose in box	lead length 5.0 mm	±5%	—	24	44	54	64
	taped on reel		±10%	—	27	47	57	67
			±5%	—	28	48	58	68

Metallized polyester film capacitors

MKT 370

MKT 370 GENERAL DATA

PITCH 5 mm

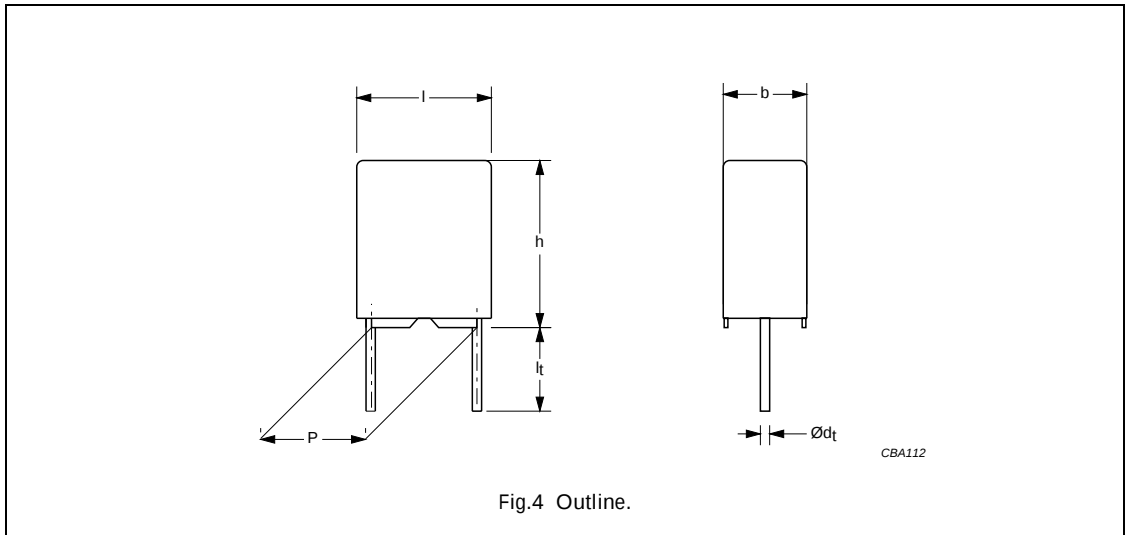

Specific reference data for the 63 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
$0.47 \mu\text{F} < C \leq 1.5 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
Rated voltage pulse slope $(dU/dt)_R$ at 63 V (DC)	60 V/ μs		
R between leads, for $C \leq 0.33 \mu\text{F}$ at 10 V; 1 minute	>15000 M Ω		
RC between leads, for:			
$0.33 \mu\text{F} < C \leq 1.0 \mu\text{F}$ at 10 V; 1 minute	>5000 s		
$C > 1.0 \mu\text{F}$ at 10 V; 1 minute	>1000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	100 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 63 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 370 75...	preferred
		$\pm 5\%$	2222 370 76...	preferred
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 370 11...	on request
		$\pm 5\%$	2222 370 12...	on request
	$l_t = 26.0 \pm 2.0 \text{ mm}$	$\pm 10\%$	2222 370 15...	on request
		$\pm 5\%$	2222 370 16...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 370 18...	on request
		$\pm 5\%$	2222 370 19...	on request

Metallized polyester film capacitors

MKT 370

$U_{Rdc} = 63 \text{ V}$; $U_{Rac} = 40 \text{ V}$

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER	
			AMMOPACK	
			H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits
Pitch = 5.08 ±0.30 mm; d _t = 0.50 ±0.05 mm				
0.056	2.5 × 6.5 × 7.2	0.25	2222 370 75 563	.. 76 563
0.068			2222 370 75 683	.. 76 683
0.082			2222 370 75 823	.. 76 823
0.1			2222 370 75 104	.. 76 104
0.12			2222 370 75 124	.. 76 124
0.15			2222 370 75 154	.. 76 154
0.18			2222 370 75 184	.. 76 184
0.22	3.5 × 8.0 × 7.2	0.35	2222 370 75 224	.. 76 224
0.27			2222 370 75 274	.. 76 274
0.33			2222 370 75 334	.. 76 334
0.39			2222 370 75 394	.. 76 394
0.47			2222 370 75 474	.. 76 474
0.56	4.5 × 9.0 × 7.2	0.45	2222 370 75 564	.. 76 564
0.68			2222 370 75 684	.. 76 684
0.82	6.0 × 11.0 × 7.2	0.60	2222 370 75 824	.. 76 824
1			2222 370 75 105	.. 76 105
1.2 ⁽¹⁾			2222 370 75 125	.. 76 125
1.5 ⁽¹⁾			2222 370 75 155	.. 76 155

Note


- For C = 1.2 μF and C = 1.5 μF : $U_{Rdc} = 50 \text{ V}$ and $U_{Rac} = 32 \text{ V}$.

Metallized polyester film capacitors

MKT 370

MKT 370 GENERAL DATA

PITCH 5 mm

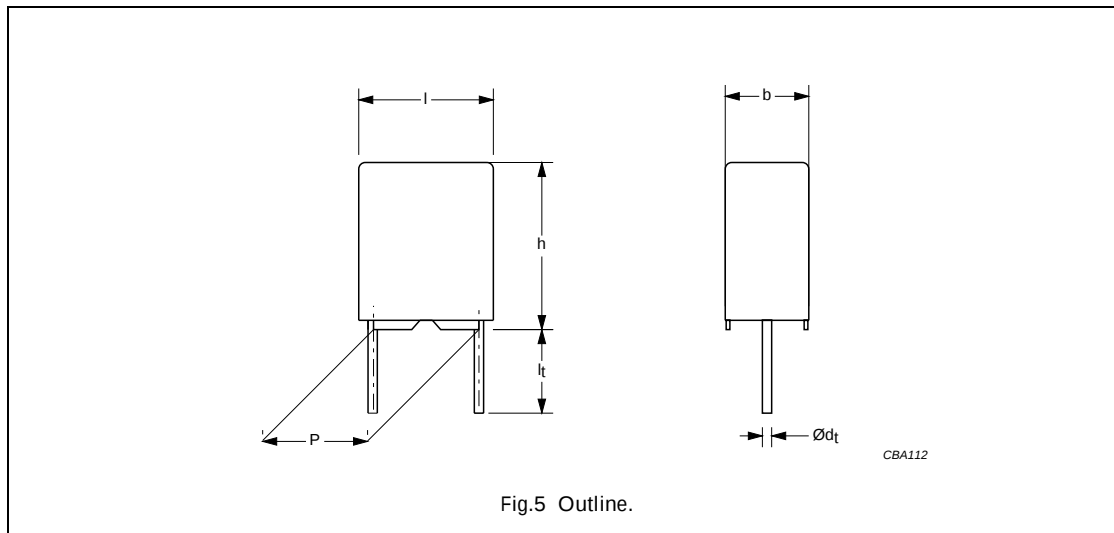

Specific reference data for the 100 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
C ≤ 0.1 μF	≤75 × 10 ⁻⁴	≤130 × 10 ⁻⁴	≤250 × 10 ⁻⁴
0.1 μF < C ≤ 0.47 μF	≤75 × 10 ⁻⁴	≤130 × 10 ⁻⁴	≤300 × 10 ⁻⁴
Rated voltage pulse slope (dU/dt) _R at 100 V (DC)	110 V/μs		
R between leads, for C ≤ 0.33 μF at 100 V; 1 minute	>15000 MΩ		
RC between leads, for C > 0.33 μF at 100 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 MΩ		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 100 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Ammopack	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 85...	preferred
		±5%	2222 370 86...	preferred
Loose in box	l _t = 4.0 +1.0/-0.5 mm	±10%	2222 370 21...	on request
		±5%	2222 370 22...	on request
	l _t = 26.0 ±2.0 mm	±10%	2222 370 25...	on request
		±5%	2222 370 26...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 28...	on request
		±5%	2222 370 29...	on request

Metallized polyester film capacitors

MKT 370

 $U_{Rdc} = 100 \text{ V}$; $U_{Rac} = 63 \text{ V}$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER	
			AMMOPACK	
			H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits
Pitch = 5.08 ±0.30 mm; d _t = 0.50 ±0.05 mm				
0.012	2.5 × 6.5 × 7.2	0.25	2222 370 85 123	.. 86 123
0.015			2222 370 85 153	.. 86 153
0.018			2222 370 85 183	.. 86 183
0.022			2222 370 85 223	.. 86 223
0.027			2222 370 85 273	.. 86 273
0.033			2222 370 85 333	.. 86 333
0.039			2222 370 85 393	.. 86 393
0.047			2222 370 85 473	.. 86 473
0.056			2222 370 85 563	.. 86 563
0.068			2222 370 85 683	.. 86 683
0.082			2222 370 85 823	.. 86 823
0.10	3.5 × 8.0 × 7.2	0.35	2222 370 85 104	.. 86 104
0.12			2222 370 85 124	.. 86 124
0.15			2222 370 85 154	.. 86 154
0.18			2222 370 85 184	.. 86 184
0.22	4.5 × 9.0 × 7.2	0.45	2222 370 85 224	.. 86 224
0.27			2222 370 85 274	.. 86 274
0.33			2222 370 85 334	.. 86 334
0.39	6.0 × 11.0 × 7.2	0.65	2222 370 85 394	.. 86 394
0.47			2222 370 85 474	.. 86 474

Metallized polyester film capacitors

MKT 370

MKT 370 GENERAL DATA

PITCH 5 mm

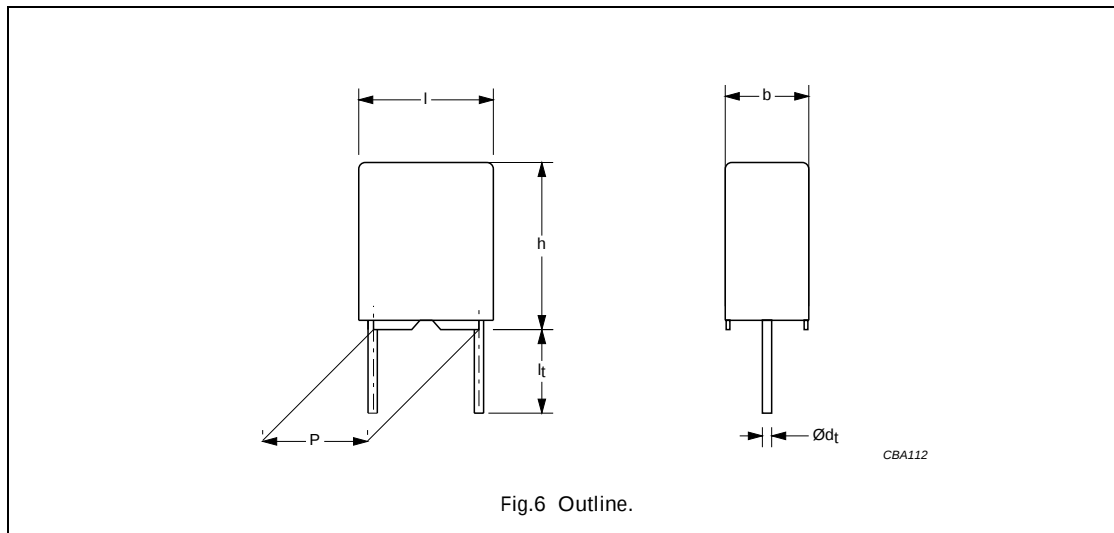

Specific reference data for the 250 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 250 V (DC)	330 V/ μ s		
R between leads at 100 V; 1 minute	>30000 M Ω		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute		
Withstanding (DC) voltage between leads and case	500 V; 1 minute		

Available 250 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Ammopack	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 35...	preferred
		±5%	2222 370 36...	preferred
Loose in box	l _t = 4.0 +1.0/-0.5 mm	±10%	2222 370 41...	on request
		±5%	2222 370 42...	on request
	l _t = 26.0 ±2.0 mm	±10%	2222 370 45...	on request
		±5%	2222 370 46...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 48...	on request
		±5%	2222 370 49...	on request

Metallized polyester film capacitors

MKT 370

$U_{Rdc} = 250 \text{ V}$; $U_{Rac} = 160 \text{ V}$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER	
			AMMOPACK	
			H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits
Pitch = 5.08 ±0.30 mm; d _t = 0.50 ±0.05 mm				
0.0039	2.5 × 6.5 × 7.2	0.25	2222 370 35 392	.. 36 392
0.0047			2222 370 35 472	.. 36 472
0.0056			2222 370 35 562	.. 36 562
0.0068			2222 370 35 682	.. 36 682
0.0082			2222 370 35 822	.. 36 822
0.01			2222 370 35 103	.. 36 103
0.012			2222 370 35 123	.. 36 123
0.015			2222 370 35 153	.. 36 153
0.018			2222 370 35 183	.. 36 183
0.022	3.5 × 8.0 × 7.2	0.35	2222 370 35 223	.. 36 223
0.027			2222 370 35 273	.. 36 273
0.033			2222 370 35 333	.. 36 333
0.039	4.5 × 9.0 × 7.2	0.45	2222 370 35 393	.. 36 393
0.047			2222 370 35 473	.. 36 473
0.056			2222 370 35 563	.. 36 563
0.068	6.0 × 11.0 × 7.2	0.60	2222 370 35 683	.. 36 683
0.082			2222 370 35 823	.. 36 823
0.1			2222 370 35 104	.. 36 104

Metallized polyester film capacitors

MKT 370

MKT 370 GENERAL DATA

PITCH 5 mm

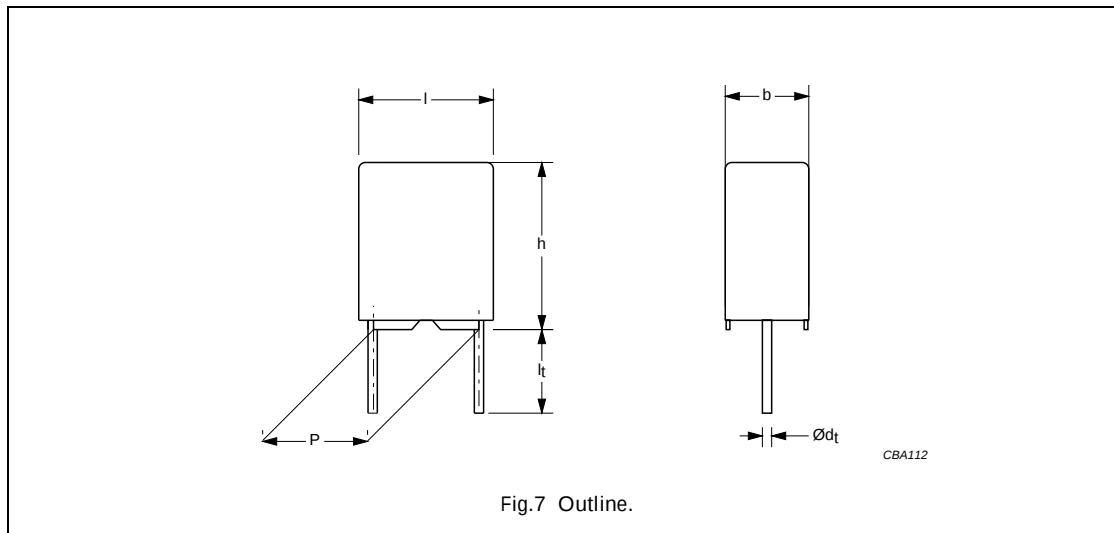

Specific reference data for the 400 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 400 V (DC)	630 V/ μ s		
R between leads at 100 V; 1 minute	>30000 M Ω		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	640 V; 1 minute		
Withstanding (DC) voltage between leads and case	800 V; 1 minute		

Available 400 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Ammopack	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 65...	preferred
		±5%	2222 370 66...	preferred
Loose in box	l _t = 4.0 +1.0/-0.5 mm	±10%	2222 370 51...	on request
		±5%	2222 370 52...	on request
	l _t = 26.0 ±2.0 mm	±10%	2222 370 55...	on request
		±5%	2222 370 56...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	±10%	2222 370 58...	on request
		±5%	2222 370 59...	on request

Metallized polyester film capacitors

MKT 370

 $U_{Rdc} = 400 \text{ V}; U_{Rac} = 220 \text{ V}$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER	
			AMMOPACK	
			H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits
Pitch = 5.08 ±0.30 mm; d _t = 0.50 ±0.05 mm				
0.001	2.5 × 6.5 × 7.2	0.25	2222 370 65 102	.. 66 102
0.0012			2222 370 65 122	.. 66 122
0.0015			2222 370 65 152	.. 66 152
0.0018			2222 370 65 182	.. 66 182
0.0022			2222 370 65 222	.. 66 222
0.0027			2222 370 65 272	.. 66 272
0.0033			2222 370 65 332	.. 66 332
0.0039			2222 370 65 392	.. 66 392
0.0047			2222 370 65 472	.. 66 472
0.0056			2222 370 65 562	.. 66 562
0.0068			2222 370 65 682	.. 66 682
0.0082			2222 370 65 822	.. 66 822
0.01	3.5 × 8.0 × 7.2	0.35	2222 370 65 103	.. 66 103
0.012			2222 370 65 123	.. 66 123
0.015			2222 370 65 153	.. 66 153
0.018	4.5 × 9.0 × 7.2	0.45	2222 370 65 183	.. 66 183
0.022			2222 370 65 223	.. 66 223
0.027			2222 370 65 273	.. 66 273
0.033	6.0 × 11.0 × 7.2	0.60	2222 370 65 333	.. 66 333
0.039			2222 370 65 393	.. 66 393
0.047			2222 370 65 473	.. 66 473

Metallized polyester film capacitors

MKT 371

MKT 371 GENERAL DATA

PITCH 7.5 mm

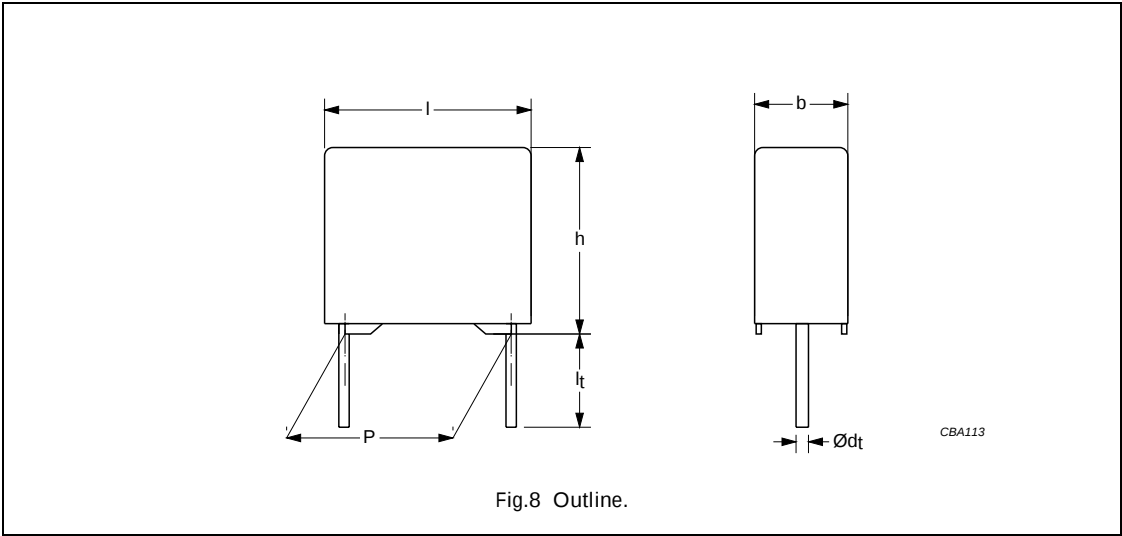

Specific reference data for the 63 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
$0.47 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	—
Rated voltage pulse slope $(dU/dt)_R$ at 63 V (DC)	18 V/ μs		
R between leads, for $C \leq 0.33 \mu\text{F}$ at 10 V; 1 minute	>15000 M Ω		
RC between leads, for $C > 0.33 \mu\text{F}$ at 10 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	100 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 63 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 371 11...	preferred
		$\pm 5\%$	2222 371 12...	preferred
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 38...	preferred
		$\pm 5\%$	2222 371 39...	preferred
Loose in box	$l_t = 26.0 \pm 2.0 \text{ mm}$	$\pm 10\%$	2222 371 15...	on request
		$\pm 5\%$	2222 371 16...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 35...	on request
		$\pm 5\%$	2222 371 36...	on request

Metallized polyester film capacitors

MKT 371

$U_{Rdc} = 63 \text{ V}$; $U_{Rac} = 40 \text{ V}$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER			
			LOOSE IN BOX		AMMOPACK	
			l _t = 4.0 +1.0/−0.5 mm		H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%	C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits	last 5 digits	
Pitch = 7.62 +0.30/−0.40 mm; d _t = 0.50 ±0.05 mm						
0.056	2.5 × 6.5 × 10.0	0.3	2222 371 11563	.. 12563	.. 38563	.. 39563
0.068			2222 371 11683	.. 12683	.. 38683	.. 39683
0.082			2222 371 11823	.. 12823	.. 38823	.. 39823
0.1			2222 371 11104	.. 12104	.. 38104	.. 39104
0.12	3.0 × 8.0 × 10.0	0.4	2222 371 11124	.. 12124	.. 38124	.. 39124
0.15			2222 371 11154	.. 12154	.. 38154	.. 39154
0.18			2222 371 11184	.. 12184	.. 38184	.. 39184
0.22			2222 371 11224	.. 12224	.. 38224	.. 39224
0.27	4.0 × 9.0 × 10.0	0.5	2222 371 11274	.. 12274	.. 38274	.. 39274
0.33			2222 371 11334	.. 12334	.. 38334	.. 39334
0.39			2222 371 11394	.. 12394	.. 38394	.. 39394
0.47			2222 371 11474	.. 12474	.. 38474	.. 39474
0.56			2222 371 11564	.. 12564	.. 38564	.. 39564
0.68			2222 371 11684	.. 12684	.. 38684	.. 39684
0.82	5.0 × 10.5 × 10.0	0.7	2222 371 11824	.. 12824	.. 38824	.. 39824
1.0			2222 371 11105	.. 12105	.. 38105	.. 39105

Metallized polyester film capacitors

MKT 371

MKT 371 GENERAL DATA

PITCH 7.5 mm

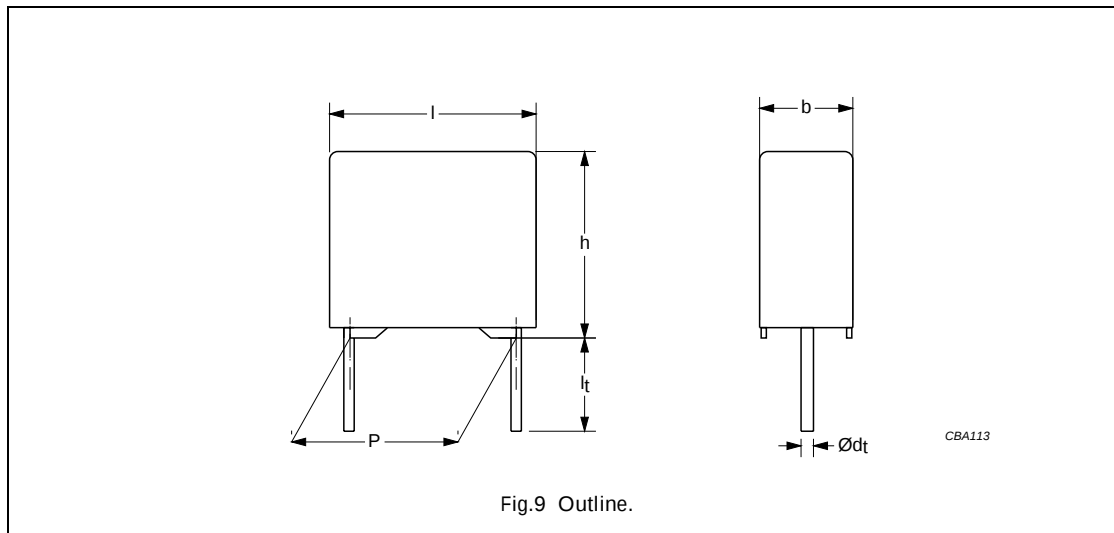

Specific reference data for the 100 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle: $C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 100 V (DC)	36 V/ μs		
R between leads, for $C \leq 0.33 \mu\text{F}$ at 100 V; 1 minute	>15000 M Ω		
RC between leads, for $C > 0.33 \mu\text{F}$ at 100 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 100 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 371 21...	preferred
		$\pm 5\%$	2222 371 22...	preferred
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 68...	preferred
		$\pm 5\%$	2222 371 69...	preferred
Loose in box	$l_t = 26.0 \pm 2.0 \text{ mm}$	$\pm 10\%$	2222 371 25...	on request
		$\pm 5\%$	2222 371 26...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 65...	on request
		$\pm 5\%$	2222 371 66...	on request

Metallized polyester film capacitors

MKT 371

$U_{Rdc} = 100 \text{ V}$; $U_{Rac} = 63 \text{ V}$

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER			
			LOOSE IN BOX		AMMOPACK	
			l _t = 4.0 +1.0/−0.5 mm		H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%	C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits	last 5 digits	
Pitch = 7.62 +0.30/−0.40 mm; d _t = 0.50 ±0.05 mm						
0.018	2.5 × 6.5 × 10.0	0.3	2222 371 21 183	.. 22 183	.. 68 183	.. 69 183
0.022			2222 371 21 223	.. 22 223	.. 68 223	.. 69 223
0.027			2222 371 21 273	.. 22 273	.. 68 273	.. 69 273
0.033			2222 371 21 333	.. 22 333	.. 68 333	.. 69 333
0.039			2222 371 21 393	.. 22 393	.. 68 393	.. 69 393
0.047			2222 371 21 473	.. 22 473	.. 68 473	.. 69 473
0.056	3.0 × 8.0 × 10.0	0.4	2222 371 21 563	.. 22 563	.. 68 563	.. 69 563
0.068			2222 371 21 683	.. 22 683	.. 68 683	.. 69 683
0.082			2222 371 21 823	.. 22 823	.. 68 823	.. 69 823
0.1			2222 371 21 104	.. 22 104	.. 68 104	.. 69 104
0.12	4.0 × 9.0 × 10.0	0.5	2222 371 21 124	.. 22 124	.. 68 124	.. 69 124
0.15			2222 371 21 154	.. 22 154	.. 68 154	.. 69 154
0.18			2222 371 21 184	.. 22 184	.. 68 184	.. 69 184
0.22			2222 371 21 224	.. 22 224	.. 68 224	.. 69 224
0.27	5.0 × 10.5 × 10.0	0.7	2222 371 21 274	.. 22 274	.. 68 274	.. 69 274
0.33			2222 371 21 334	.. 22 334	.. 68 334	.. 69 334
0.39			2222 371 21 394	.. 22 394	.. 68 394	.. 69 394
0.47			2222 371 21 474	.. 22 474	.. 68 474	.. 69 474

Metallized polyester film capacitors

MKT 371

MKT 371 GENERAL DATA

PITCH 7.5 mm

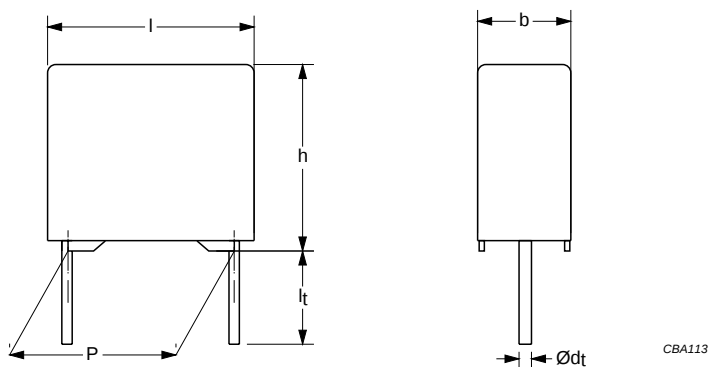


Fig.10 Outline.

Specific reference data for the 250 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle: $C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.12 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 250 V (DC)	70 V/ μs		
R between leads at 100 V; 1 minute	$>30000 \text{ M}\Omega$		
R between interconnected leads and case (foil method)	$>30000 \text{ M}\Omega$		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute		
Withstanding (DC) voltage between leads and case	500 V; 1 minute		

Available 250 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 371 41...	preferred
		$\pm 5\%$	2222 371 42...	preferred
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 78...	preferred
		$\pm 5\%$	2222 371 79...	preferred
Loose in box	$l_t = 26.0 \pm 2.0 \text{ mm}$	$\pm 10\%$	2222 371 45...	on request
		$\pm 5\%$	2222 371 46...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 371 75...	on request
		$\pm 5\%$	2222 371 76...	on request

Metallized polyester film capacitors

MKT 371

$U_{Rdc} = 250 \text{ V}$; $U_{Rac} = 160 \text{ V}$


C (μ F)	DIMENSIONS $b \times h \times l$ (mm)	MASS (g)	CATALOGUE NUMBER			
			LOOSE IN BOX		AMMOPACK	
			$l_t = 4.0 +1.0/-0.5 \text{ mm}$		$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	
			C-tol = $\pm 10\%$	C-tol = $\pm 5\%$	C-tol = $\pm 10\%$	C-tol = $\pm 5\%$
			catalogue number	last 5 digits	last 5 digits	
Pitch = $7.62 +0.30/-0.40 \text{ mm}; d_t = 0.50 \pm 0.05 \text{ mm}$						
0.0082	$2.5 \times 6.5 \times 10.0$	0.3	2222 371 41822	.. 42822	.. 78822	.. 79822
0.01			2222 371 41103	.. 42103	.. 78103	.. 79103
0.012			2222 371 41123	.. 42123	.. 78123	.. 79123
0.015			2222 371 41153	.. 42153	.. 78153	.. 79153
0.018	$3.0 \times 8.0 \times 10.0$	0.4	2222 371 41183	.. 42183	.. 78183	.. 79183
0.022			2222 371 41223	.. 42223	.. 78223	.. 79223
0.027			2222 371 41273	.. 42273	.. 78273	.. 79273
0.033			2222 371 41333	.. 42333	.. 78333	.. 79333
0.039			2222 371 41393	.. 42393	.. 78393	.. 79393
0.047			2222 371 41473	.. 42473	.. 78473	.. 79473
0.056	$4.0 \times 9.0 \times 10.0$	0.5	2222 371 41563	.. 42563	.. 78563	.. 79563
0.068			2222 371 41683	.. 42683	.. 78683	.. 79683
0.082			2222 371 41823	.. 42823	.. 78823	.. 79823
0.1			2222 371 41104	.. 42104	.. 78104	.. 79104
0.12	$5.0 \times 10.5 \times 10.0$	0.7	2222 371 41124	.. 42124	.. 78124	.. 79124

Metallized polyester film capacitors

MKT 371

MKT 371 GENERAL DATA

PITCH 7.5 mm

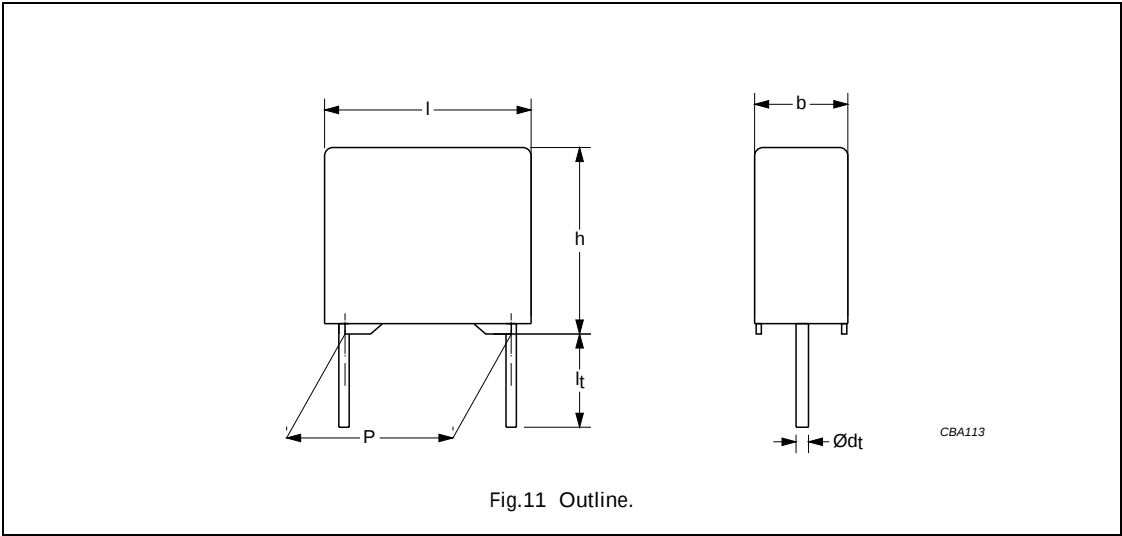

Specific reference data for the 400 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 400 V (DC)	190 V/ μ s		
R between leads at 100 V; 1 minute	>30000 M Ω		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	640 V; 1 minute		
Withstanding (DC) voltage between leads and case	800 V; 1 minute		

Available 400 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5$ mm	$\pm 10\%$	2222 371 51...	preferred
		$\pm 5\%$	2222 371 52...	preferred
Ammopack	H = 18.5 mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 371 88...	preferred
		$\pm 5\%$	2222 371 89...	preferred
Loose in box	$l_t = 26.0 \pm 2.0$ mm	$\pm 10\%$	2222 371 55...	on request
		$\pm 5\%$	2222 371 56...	on request
Taped on reel	H = 18.5 mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 371 85...	on request
		$\pm 5\%$	2222 371 86...	on request

Metallized polyester film capacitors

MKT 371

$U_{Rdc} = 400 \text{ V}$; $U_{Rac} = 220 \text{ V}$

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER			
			LOOSE IN BOX		AMMOPACK	
			l _t = 4.0 +1.0/−0.5 mm		H = 18.5 mm; P ₀ = 12.7 mm	
			C-tol = ±10%	C-tol = ±5%	C-tol = ±10%	C-tol = ±5%
			catalogue number	last 5 digits	last 5 digits	
Pitch = 7.62 +0.30/−0.40 mm; d _t = 0.50 ±0.05 mm						
0.0039 0.0047 0.0056 0.0068	2.5 × 6.5 × 10.0	0.3	2222 371 51 392	.. 52 392	.. 88 392	.. 89 392
2222 371 51 472			.. 52 472	.. 88 472	.. 89 472	
2222 371 51 562			.. 52 562	.. 88 562	.. 89 562	
2222 371 51 682			.. 52 682	.. 88 682	.. 89 682	
0.0082 0.01	3.0 × 8.0 × 10.0	0.4	2222 371 51 822	.. 52 822	.. 88 822	.. 89 822
2222 371 51 103			.. 52 103	.. 88 103	.. 89 103	
0.012 0.015	4.0 × 9.0 × 10.0	0.5	2222 371 51 123	.. 52 123	.. 88 123	.. 89 123
2222 371 51 153			.. 52 153	.. 88 153	.. 89 153	
0.018 0.022 0.027 0.033 0.039	5.0 × 10.5 × 10.0	0.7	2222 371 51 183	.. 52 183	.. 88 183	.. 89 183
2222 371 51 223			.. 52 223	.. 88 223	.. 89 223	
2222 371 51 273			.. 52 273	.. 88 273	.. 89 273	
2222 371 51 333			.. 52 333	.. 88 333	.. 89 333	
2222 371 51 393			.. 52 393	.. 88 393	.. 89 393	

Metallized polyester film capacitors

MKT 372

MKT 372 GENERAL DATA

PITCH 10 mm

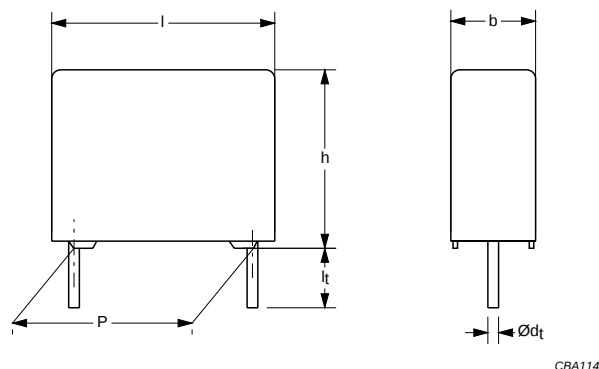


Fig.12 Outline.

Specific reference data for the 100 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.68 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 100 V (DC)	34 V/ μs		
R between leads, for $C \leq 0.33 \mu\text{F}$ at 100 V; 1 minute	>15000 M Ω		
RC between leads, for $C > 0.33 \mu\text{F}$ at 100 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 100 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 372 21...	preferred
		$\pm 5\%$	2222 372 22...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 372 25...	on request
		$\pm 5\%$	2222 372 26...	on request
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 372 28...	on request
		$\pm 5\%$	2222 372 29...	on request

Metallized polyester film capacitors

MKT 372

$U_{Rdc} = 100V$; $U_{Rac} = 63 V$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 4.0 +1.0/−0.5 mm
			C-tol = ±10%
Pitch = 10.0 ±0.4 mm; d _t = 0.60 ±0.06 mm			
0.1	4.0 × 10.0 × 12.5	0.7	2222 372 21 104
0.12			2222 372 21 124
0.15			2222 372 21 154
0.18			2222 372 21 184
0.22			2222 372 21 224
0.27			2222 372 21 274
0.33			2222 372 21 334
0.39	5.0 × 11.0 × 12.5	0.9	2222 372 21 394
0.47			2222 372 21 474
0.56	6.0 × 12.0 × 12.5	1.0	2222 372 21 564
0.68			2222 372 21 684

Metallized polyester film capacitors

MKT 372

MKT 372 GENERAL DATA

PITCH 10 mm

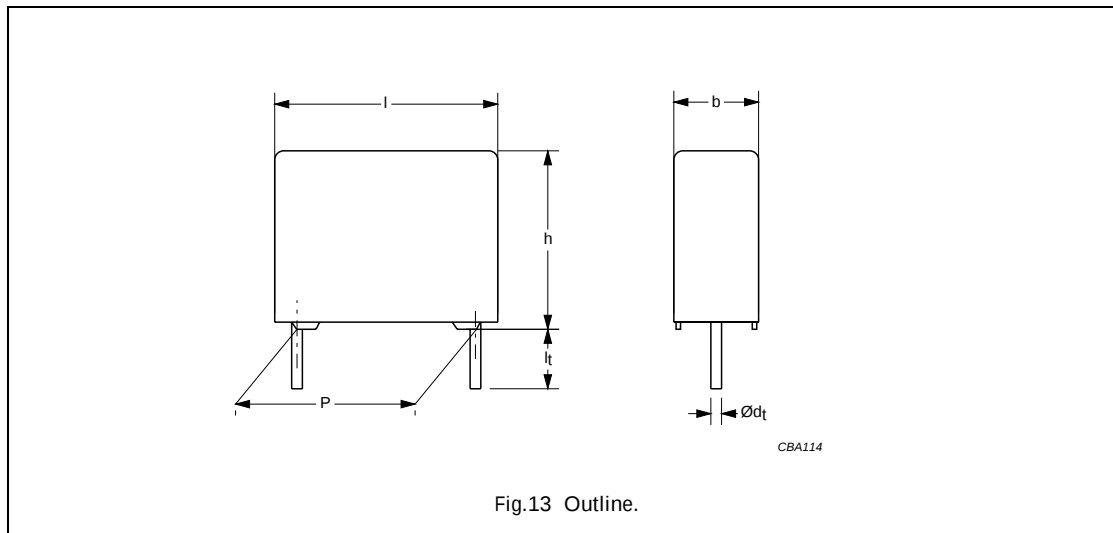

Specific reference data for the 250 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle: $C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.22 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 250 V (DC)	50 V/ μs		
R between leads at 100 V; 1 minute	$>30000 \text{ M}\Omega$		
R between interconnected leads and case (foil method)	$>30000 \text{ M}\Omega$		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute		
Withstanding (DC) voltage between leads and case	500 V; 1 minute		

Available 250 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5 \text{ mm}$	$\pm 10\%$	2222 372 41...	preferred
		$\pm 5\%$	2222 372 42...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 372 45...	on request
		$\pm 5\%$	2222 372 46...	on request
Ammopack	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 372 48...	on request
		$\pm 5\%$	2222 372 49...	on request

Metallized polyester film capacitors

MKT 372

$U_{Rdc} = 250 \text{ V}$; $U_{Rac} = 160 \text{ V}$

C (μ F)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 4.0 +1.0/−0.5 mm
			C-tol = ±10%
Pitch = 10.0 ±0.4 mm; d _t = 0.60 ±0.06 mm			
0.047 0.056 0.068 0.082 0.1	4.0 × 10.0 × 12.5	0.7	2222 372 41 473
2222 372 41 563			
2222 372 41 683			
2222 372 41 823			
2222 372 41 104			
0.12 0.15	5.0 × 11.0 × 12.5	0.9	2222 372 41 124
2222 372 41 154			
0.18 0.22	6.0 × 12.0 × 12.5	1.0	2222 372 41 184
2222 372 41 224			

Metallized polyester film capacitors

MKT 372

MKT 372 GENERAL DATA

PITCH 10 mm

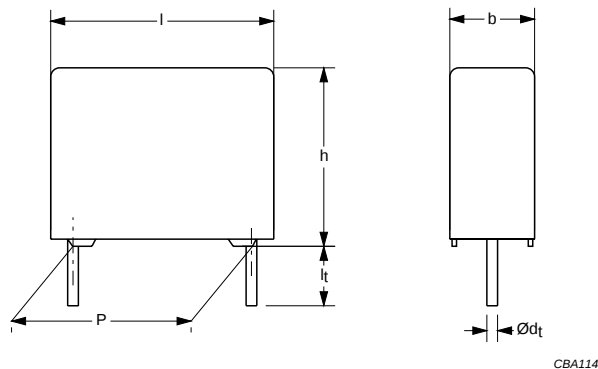


Fig.14 Outline.

Specific reference data for the 400 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 400 V (DC)	80 V/ μ s		
R between leads at 100 V; 1 minute	>30000 M Ω		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	640 V; 1 minute		
Withstanding (DC) voltage between leads and case	800 V; 1 minute		

Available 400 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5$ mm	$\pm 10\%$	2222 372 51...	preferred
		$\pm 5\%$	2222 372 52...	on request
Taped on reel	$H = 18.5$ mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 372 55...	on request
		$\pm 5\%$	2222 372 56...	on request
Ammopack	$H = 18.5$ mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 372 58...	on request
		$\pm 5\%$	2222 372 59...	on request

Metallized polyester film capacitors

MKT 372

$U_{Rdc} = 400 \text{ V}$; $U_{Rac} = 220 \text{ V}$

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 4.0 +1.0/−0.5 mm
			C-tol = ±10%
Pitch = 10.0 ±0.4 mm; d _t = 0.60 ±0.06 mm			
0.0047	4.0 × 10.0 × 12.5	0.7	2222 372 51 472
0.0056			2222 372 51 562
0.0068			2222 372 51 682
0.0082			2222 372 51 822
0.01			2222 372 51 103
0.012			2222 372 51 123
0.015			2222 372 51 153
0.018			2222 372 51 183
0.022			2222 372 51 223
0.027			2222 372 51 273
0.033	2222 372 51 333		
0.039	5.0 × 11.0 × 12.5	0.9	2222 372 51 393
0.047			2222 372 51 473
0.056			2222 372 51 563
0.068	6.0 × 12.0 × 12.5	1.0	2222 372 51 683
0.082			2222 372 51 823

Metallized polyester film capacitors

MKT 372

MKT 372 GENERAL DATA

PITCH 10 mm

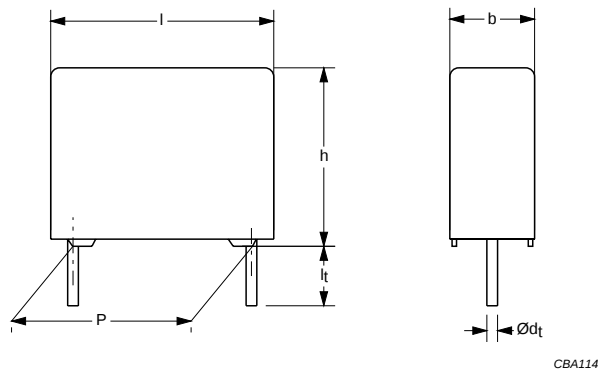


Fig.15 Outline.

Specific reference data for the 630 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
Rated voltage pulse slope $(dU/dt)_R$ at 400 (DC)	120 V/ μ s		
R between leads at 500 V; 1 minute	>30000 M Ω		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	1008 V; 1 minute		
Withstanding (DC) voltage between leads and case	1260 V; 1 minute		

Available 630 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 4.0 +1.0/-0.5$ mm	$\pm 10\%$	2222 372 61...	preferred
		$\pm 5\%$	2222 372 62...	on request
Taped on reel	H = 18.5 mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 372 65...	on request
		$\pm 5\%$	2222 372 66...	on request
Ammopack	H = 18.5 mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 372 68...	on request
		$\pm 5\%$	2222 372 69...	on request

Metallized polyester film capacitors

MKT 372

$U_{Rdc} = 630 \text{ V}$; $U_{Rac} = 250 \text{ V}$


C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			It = 4.0 +1.0/−0.5 mm
			C-tol = ±10%
Pitch = 10.0 ±0.4 mm; d _t = 0.60 ±0.06 mm			
0.01	4.0 × 10.0 × 12.5	0.6	2222 372 61103
0.012			2222 372 61123
0.015			2222 372 61153
0.018			2222 372 61183
0.022			2222 372 61223
0.027	5.0 × 11.0 × 12.5	0.9	2222 372 61273
0.033			2222 372 61333
0.039	6.0 × 12.0 × 12.5	1.0	2222 372 61393
0.047			2222 372 61473

Metallized polyester film capacitors

MKT 373

MKT 373 GENERAL DATA

PITCH 15 mm (COMPACT SIZE)

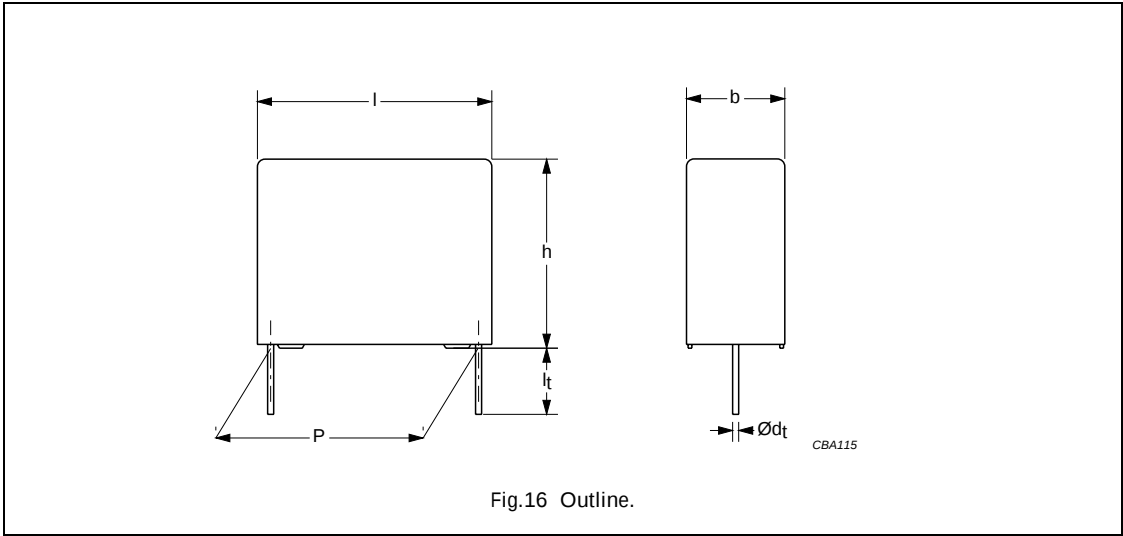

Specific reference data for the 100 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
0.33 μ F < C $\leq$ 0.47 μ F	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
0.47 μ F < C $\leq$ 1.0 μ F	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
1.0 μ F < C $\leq$ 2.2 μ F	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
Rated voltage pulse slope (dU/dt) _R at 100 V (DC):	14 V/ μ s		
R between leads, for C $\leq$ 0.33 μ F at 100 V; 1 minute	>15000 M Ω		
RC between leads, for C > 0.33 μ F at 100 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 100 V DC versions

PACKAGING	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0$ mm	$\pm 10\%$	2222 373 23...	preferred
		$\pm 5\%$	2222 373 24...	on request
Taped on reel	$H = 18.5$ mm; $P_0 = 12.7$ mm	$\pm 10\%$	2222 373 27...	on request
		$\pm 5\%$	2222 373 28...	on request

Metallized polyester film capacitors

MKT 373

 $U_{Rdc} = 100 \text{ V}; U_{Rac} = 63 \text{ V}$

(COMPACT SIZE)


C (μ F)	DIMENSIONS $b \times h \times l$ (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			$l_t = 5.0 \pm 1.0$ mm
			C-tol = $\pm 10\%$
Pitch = 15.0 ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm			
0.33	$5.0 \times 11.0 \times 17.5$	1.1	2222 373 23 334
0.39			2222 373 23 394
0.47			2222 373 23 474
0.56			2222 373 23 564
0.68			2222 373 23 684
0.82			2222 373 23 824
1			2222 373 23 105
1.2			2222 373 23 125
1.5			2222 373 23 155
1.8			2222 373 23 185
2.2	$6.0 \times 12.0 \times 17.5$	1.4	2222 373 23 225

Metallized polyester film capacitors

MKT 373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (COMPACT SIZE)

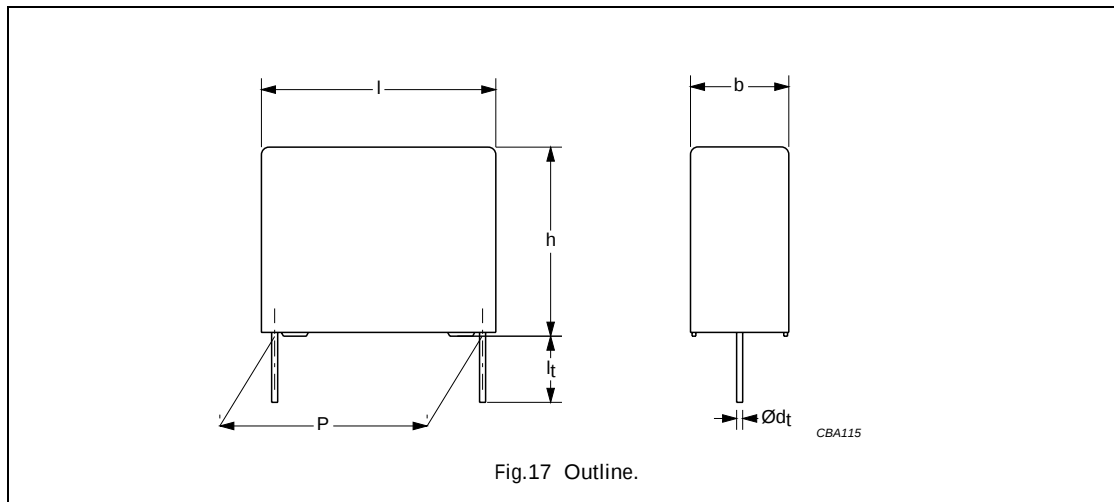

Specific reference data for the 250 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
0.15 μF < C $\leq$ 0.47 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
0.47 μF < C $\leq$ 1.0 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
1.0 μF < C $\leq$ 4.7 μF	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
Rated voltage pulse slope (dU/dt) _R at 250 V (DC):			
P = 15 mm	16 V/ μs		
P = 22.5 mm	7 V/ μs		
P = 27.5 mm	6 V/ μs		
R between leads, for C $\leq$ 0.33 μF at 100 V; 1 minute	>30000 M Ω		
RC between leads, for C > 0.33 μF at 100 V; 1 minute	>10000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute		
Withstanding (DC) voltage between leads and case	500 V; 1 minute		

Available 250 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0$ mm	$\pm 10\%$	2222 373 43...	preferred
		$\pm 5\%$	2222 373 44...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	$\pm 10\%$	2222 373 47...	on request
		$\pm 5\%$	2222 373 48...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 373

 $U_{Rdc} = 250 \text{ V}; U_{Rac} = 160 \text{ V}$

(COMPACT SIZE)


C (μ F)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 5.0 ±1.0 mm
			C-tol = ±10%
Pitch = 15.0 ±0.4 mm; d _t = 0.80 ±0.08 mm			
0.15 0.18 0.22 0.27 0.33	5.0 × 11.0 × 17.5	1.1	2222 373 43 154
2222 373 43 184			
2222 373 43 224			
2222 373 43 274			
2222 373 43 334			
0.39 0.47	6.0 × 12.0 × 17.5	1.4	2222 373 43 394
2222 373 43 474			
0.56 0.68	7.0 × 13.5 × 17.5	1.9	2222 373 43 564
2222 373 43 684			
0.82 1.0	8.5 × 15.0 × 17.5	2.6	2222 373 43 824
2222 373 43 105			
1.2	10.0 × 16.5 × 17.5	3.1	2222 373 43 125
Pitch = 22.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
1.5 1.8	8.5 × 18.0 × 26.0	4.4	2222 373 43 155
2222 373 43 185			
2.2 2.7	10.0 × 19.5 × 26.0	5.5	2222 373 43 225
2222 373 43 275			
Pitch = 27.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
3.3	11.0 × 21.0 × 31.0	7.8	2222 373 43 335
3.9 4.7	13.0 × 23.0 × 31.0	10.4	2222 373 43 395
2222 373 43 475			

Metallized polyester film capacitors

MKT 373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (COMPACT SIZE)

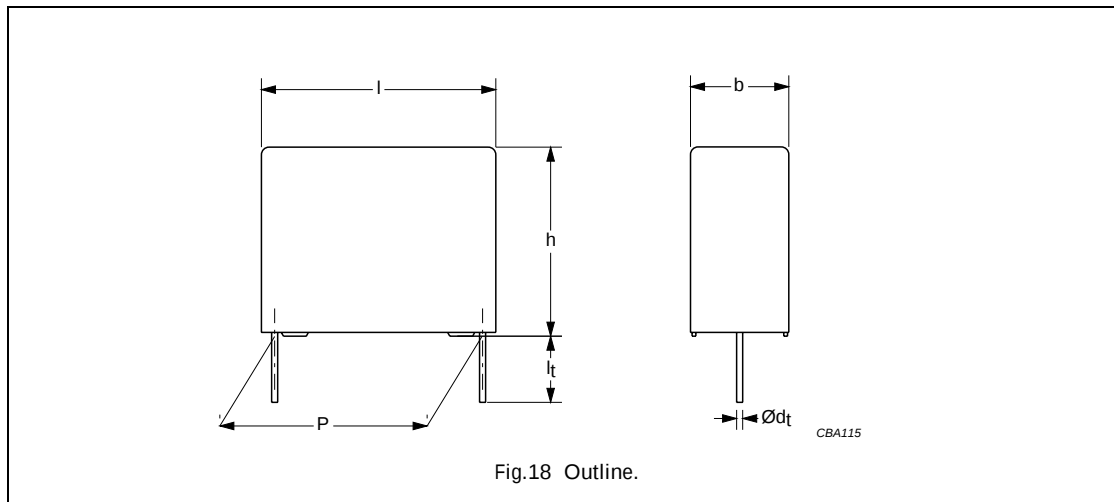

Specific reference data for the 400 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
$0.47 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
$1.0 \mu\text{F} < C \leq 1.5 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
Rated voltage pulse slope $(dU/dt)_R$ at 400 V (DC):			
$P = 15 \text{ mm}$		34 V/ μs	
$P = 22.5 \text{ mm}$		14 V/ μs	
$P = 27.5 \text{ mm}$		12 V/ μs	
R between leads, for $C \leq 0.33 \mu\text{F}$ at 100 V; 1 minute		>30000 M Ω	
RC between leads, for $C > 0.33 \mu\text{F}$ at 100 V; 1 minute		>10000 s	
R between interconnected leads and case (foil method)		>30000 M Ω	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s		640 V; 1 minute	
Withstanding (DC) voltage between leads and case		800 V; 1 minute	

Available 400 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0 \text{ mm}$	$\pm 10\%$	2222 373 53...	preferred
		$\pm 5\%$	2222 373 54...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 373 57...	on request
		$\pm 5\%$	2222 373 58...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 373

 $U_{Rdc} = 400 \text{ V}; U_{Rac} = 220 \text{ V}$

(COMPACT SIZE)


C (μ F)	DIMENSIONS $b \times h \times l$ (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			$l_t = 5.0 \pm 1.0$ mm
			C-tol = $\pm 10\%$
Pitch = 15.0 ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm			
0.047 0.056 0.068 0.082 0.1 0.12 0.15	$5.0 \times 11.0 \times 17.5$	1.1	2222 373 53 473
2222 373 53 563			
2222 373 53 683			
2222 373 53 823			
2222 373 53 104			
2222 373 53 124			
2222 373 53 154			
0.18 0.22	$6.0 \times 12.0 \times 17.5$	1.4	2222 373 53 184
2222 373 53 224			
0.27 0.33	$7.0 \times 13.5 \times 17.5$	1.9	2222 373 53 274
2222 373 53 334			
0.39 0.47	$8.5 \times 15.0 \times 17.5$	2.6	2222 373 53 394
2222 373 53 474			
0.56	$10.0 \times 16.5 \times 17.5$	3.2	2222 373 53 564
Pitch = 22.5 ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm			
0.68 0.82	$8.5 \times 18.0 \times 26.0$	4.4	2222 373 53 684
2222 373 53 824			
1 1.2	$10.0 \times 19.5 \times 26.0$	5.5	2222 373 53 105
2222 373 53 125			
Pitch = 27.5 ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm			
1.5	$11.0 \times 21.0 \times 31.0$	7.8	2222 373 53 155

Metallized polyester film capacitors

MKT 373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (COMPACT SIZE)

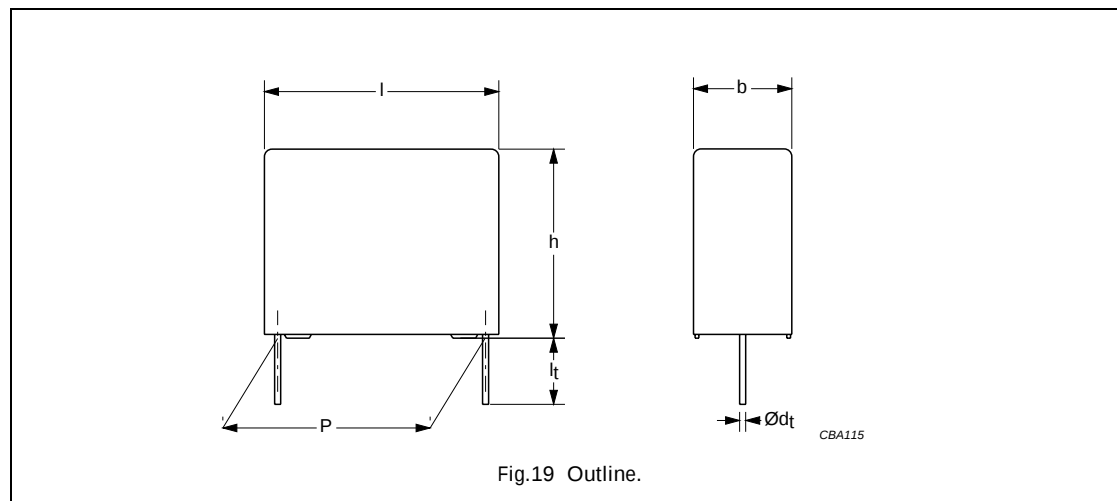

Specific reference data for the 630 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
$0.47 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
Rated voltage pulse slope $(dU/dt)_R$ at 630 V _{dc} :			
P = 15 mm	90 V/ μs		
P = 22.5 mm	35 V/ μs		
P = 27.5 mm	30 V/ μs		
R between leads, for $C \leq 0.33 \mu\text{F}$ at 500 V; 1 minute	>30000 M Ω		
RC between leads, for $C > 0.33 \mu\text{F}$ at 500 V; 1 minute	>10000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	1008 V; 1 minute		
Withstanding (DC) voltage between leads and case	1260 V; 1 minute		

Available 630 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0 \text{ mm}$	$\pm 10\%$	2222 373 63...	preferred
		$\pm 5\%$	2222 373 64...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 373 67...	on request
		$\pm 5\%$	2222 373 68...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 373

 $U_{Rdc} = 630 \text{ V}; U_{Rac} = 250 \text{ V}$

(Compact size)


C (μF)	DIMENSIONS $b \times h \times l$ (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			It = 5.0 $\pm$ 1.0 mm
			C-tol = $\pm$ 10%
Pitch = 15.0 $\pm$ 0.4 mm; d_t = 0.80 $\pm$ 0.08 mm			
0.056	5.0 $\times$ 11.0 $\times$ 17.5	1.1	2222 373 63 563
0.068	6.0 $\times$ 12.0 $\times$ 17.5	1.4	2222 373 63 683
0.082			2222 373 63 823
0.1	7.0 $\times$ 13.5 $\times$ 17.5	1.9	2222 373 63 104
0.12			2222 373 63 124
0.15	8.5 $\times$ 15.0 $\times$ 17.5	2.6	2222 373 63 154
0.18			2222 373 63 184
0.22	10.0 $\times$ 16.5 $\times$ 17.5	3.2	2222 373 63 224
Pitch = 22.5 $\pm$ 0.4 mm; d_t = 0.80 $\pm$ 0.08 mm			
0.27	8.5 $\times$ 18.0 $\times$ 26.0	4.4	2222 373 63 274
0.33			2222 373 63 334
0.39	10.0 $\times$ 19.5 $\times$ 26.0	5.5	2222 373 63 394
0.47			2222 373 63 474
Pitch = 27.5 $\pm$ 0.4 mm; d_t = 0.80 $\pm$ 0.08 mm			
0.56	11.0 $\times$ 21.0 $\times$ 31.0	7.8	2222 373 63 564
0.68	13.0 $\times$ 23.0 $\times$ 31.0	10.5	2222 373 63 684
0.82			2222 373 63 824
1	15.0 $\times$ 25.0 $\times$ 31.0	7.8	2222 373 63 105

Metallized polyester film capacitors

MKT 373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (STANDARD SIZE)

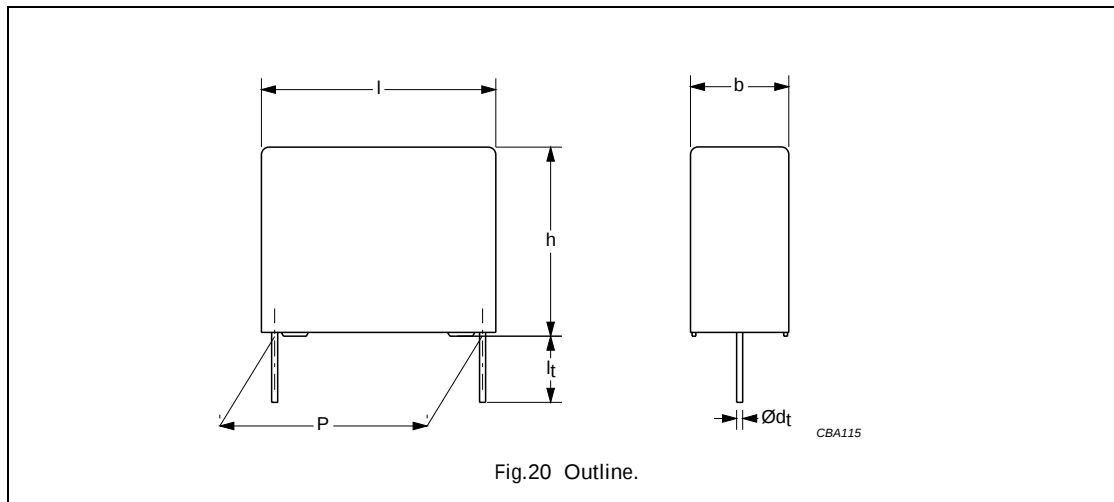

Specific reference data for the 100 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
0.33 μF < C $\leq$ 0.47 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
0.47 μF < C $\leq$ 1.0 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
1.0 μF < C $\leq$ 10 μF	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
C > 10 μF	$\leq 75 \times 10^{-4}$	–	–
Rated voltage pulse slope (dU/dt) _R at 100 V (DC):			
P = 15 mm	14 V/ μs		
P = 22.5 mm	5 V/ μs		
P = 27.5 mm	4 V/ μs		
R between leads, for C $\leq$ 0.33 μF at 100 V; 1 minute	>15000 M Ω		
RC between leads, for C > 0.33 μF at 100 V; 1 minute	>5000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute		
Withstanding (DC) voltage between leads and case	200 V; 1 minute		

Available 100 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0$ mm	$\pm 10\%$	2222 373 21...	on request
		$\pm 5\%$	2222 373 22...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	$\pm 10\%$	2222 373 25...	on request
		$\pm 5\%$	2222 373 26...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 373

 $U_{Rdc} = 100 \text{ V}; U_{Rac} = 63 \text{ V}$

(STANDARD SIZE)


C (μ F)	DIMENSIONS b $\times$ h $\times$ l (mm)	MASS (g)	CATALOGUE NUMBER		
			LOOSE IN BOX		
			l _t = 5.0 $\pm$ 1.0 mm		
			C-tol = $\pm$ 10%		
Pitch = 15.0 $\pm$ 0.4 mm; d _t = 0.80 $\pm$ 0.08 mm					
0.33 0.39 0.47 0.56 0.68	5.0 $\times$ 11.0 $\times$ 17.5	1.1	2222 373 21 334 2222 373 21 394 2222 373 21 474 2222 373 21 564 2222 373 21 684		
0.82 1			6.0 $\times$ 12.0 $\times$ 17.5	1.4	2222 373 21 824 2222 373 21 105
1.2 1.5					7.0 $\times$ 13.5 $\times$ 17.5
1.8 2.2			8.5 $\times$ 15.0 $\times$ 17.5	2.6	
Pitch = 22.5 $\pm$ 0.4 mm; d _t = 0.80 $\pm$ 0.08 mm					
2.7 3.3	8.5 $\times$ 18.0 $\times$ 26.0	4.4	2222 373 21 275 2222 373 21 335		
3.9 4.7			10.0 $\times$ 19.5 $\times$ 26.0	5.5	2222 373 21 395 2222 373 21 475
Pitch = 27.5 $\pm$ 0.4 mm; d _t = 0.80 $\pm$ 0.08 mm					
5.6 6.8	11.0 $\times$ 21.0 $\times$ 31.0	8.0	2222 373 21 565 2222 373 21 685		
8.2 10			13.0 $\times$ 23.0 $\times$ 31.0	10.5	2222 373 21 825 2222 373 21 106
12 15	18.0 $\times$ 28.0 $\times$ 31.0	17.5			2222 373 21 126 2222 373 21 156

Metallized polyester film capacitors

MKT 370/371/372/373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (STANDARD SIZE)

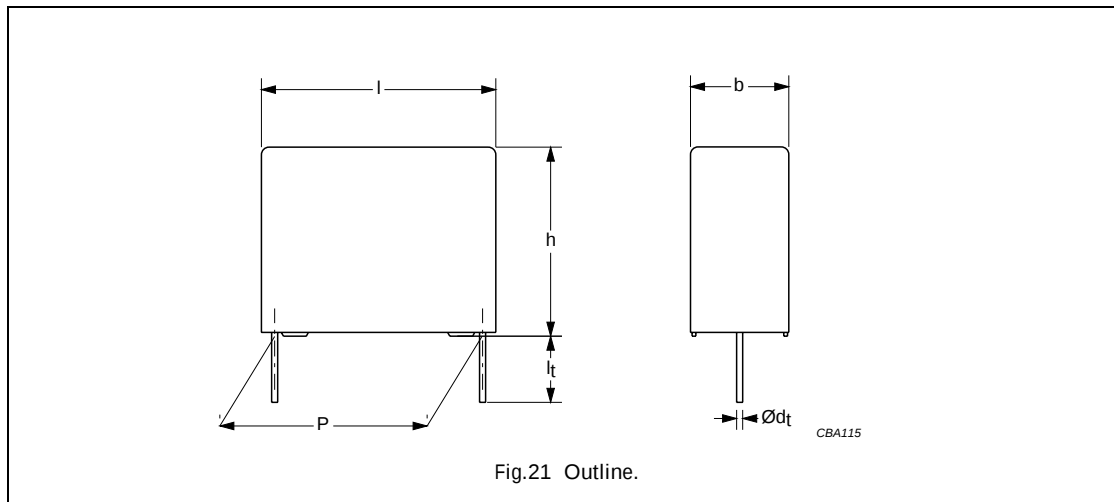

Specific reference data for the 250 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
0.15 μF < C $\leq$ 0.47 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
0.47 μF < C $\leq$ 1.0 μF	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
1.0 μF < C $\leq$ 4.7 μF	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
Rated voltage pulse slope (dU/dt) _R at 250 V (DC):			
P = 15 mm	16 V/ μs		
P = 22.5 mm	7 V/ μs		
P = 27.5 mm	6 V/ μs		
R between leads, for C $\leq$ 0.33 μF at 100 V; 1 minute	>30000 M Ω		
RC between leads, for C > 0.33 μF at 100 V; 1 minute	>10000 s		
R between interconnected leads and case (foil method)	>30000 M Ω		
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute		
Withstanding (DC) voltage between leads and case	500 V; 1 minute		

Available 250 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0$ mm	$\pm 10\%$	2222 373 41...	on request
		$\pm 5\%$	2222 373 42...	on request
Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm	$\pm 10\%$	2222 373 45...	on request
		$\pm 5\%$	2222 373 46...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 370/371/372/373

 $U_{Rdc} = 250 \text{ V}; U_{Rac} = 160 \text{ V}$

(STANDARD SIZE)

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 5.0 ±1.0 mm
			C-tol = ±10%
Pitch = 15.0 ±0.4 mm; d _t = 0.80 ±0.08 mm			
0.15 0.18 0.22	5.0 × 11.0 × 17.5	1.1	2222 373 41 154 2222 373 41 184 2222 373 41 224
0.27 0.33 0.39 0.47	6.0 × 12.0 × 17.5	1.4	2222 373 41 274 2222 373 41 334 2222 373 41 394 2222 373 41 474
0.56 0.68	7.0 × 13.5 × 17.5	1.9	2222 373 41 564 2222 373 41 684
0.82 1.0	8.5 × 15.0 × 17.5	2.6	2222 373 41 824 2222 373 41 105
Pitch = 22.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
1.2 1.5	8.5 × 18.0 × 26.0	4.4	2222 373 41 125 2222 373 41 155
1.8 2.2	10.0 × 19.5 × 26.0	5.5	2222 373 41 185 2222 373 41 225
Pitch = 27.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
2.7 3.3	13.0 × 23.0 × 31.0	10.4	2222 373 41 275 2222 373 41 335
3.9 4.7	15.0 × 25.0 × 31.0	12.5	2222 373 41 395 2222 373 41 475

Metallized polyester film capacitors

MKT 370/371/372/373

MKT 373 GENERAL DATA

PITCH 15/22.5/27.5 mm (STANDARD SIZE)

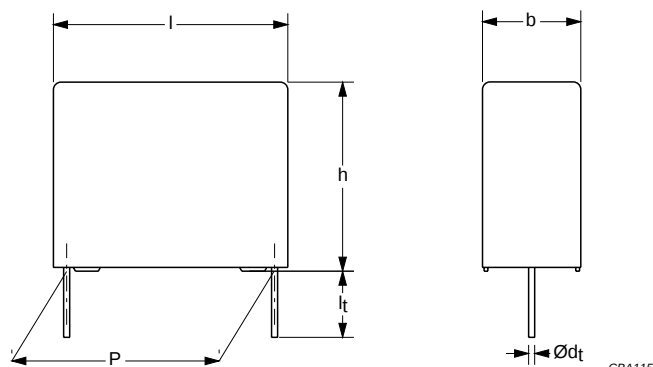


Fig.22 Outline.

Specific reference data for the 400 V DC capacitors

DESCRIPTION	VALUE		
	at 1 kHz	at 10 kHz	at 100 kHz
Tangent of loss angle:			
$C \leq 0.1 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 250 \times 10^{-4}$
$0.1 \mu\text{F} < C \leq 0.47 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	$\leq 300 \times 10^{-4}$
$0.47 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 130 \times 10^{-4}$	–
$1.0 \mu\text{F} < C \leq 1.5 \mu\text{F}$	$\leq 75 \times 10^{-4}$	$\leq 150 \times 10^{-4}$	–
Rated voltage pulse slope $(dU/dt)_R$ at 400 V (DC):			
P = 15 mm		34 V/ μs	
P = 22.5 mm		14 V/ μs	
P = 27.5 mm		12 V/ μs	
R between leads, for $C \leq 0.33 \mu\text{F}$ at 100 V; 1 minute		>30000 M Ω	
RC between leads, for $C > 0.33 \mu\text{F}$ at 100 V; 1 minute		>10000 s	
R between interconnected leads and case (foil method)		>30000 M Ω	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s		640 V; 1 minute	
Withstanding (DC) voltage between leads and case		800 V; 1 minute	

Available 400 V DC versions

PACKAGING ⁽¹⁾	DIMENSIONS	C-tol	FIRST 9 DIGITS OF CATALOGUE NUMBER	ORDERING
Loose in box	$l_t = 5.0 \pm 1.0 \text{ mm}$	$\pm 10\%$	2222 373 51...	on request
		$\pm 5\%$	2222 373 52...	on request
Taped on reel	$H = 18.5 \text{ mm}; P_0 = 12.7 \text{ mm}$	$\pm 10\%$	2222 373 55...	on request
		$\pm 5\%$	2222 373 56...	on request

Note

1. Taped on reel pitch = 27.5 mm is not available.

Metallized polyester film capacitors

MKT 370/371/372/373

 $U_{Rdc} = 400\text{ V}; U_{Rac} = 220\text{ V}$

(STANDARD SIZE)

C (μF)	DIMENSIONS b × h × l (mm)	MASS (g)	CATALOGUE NUMBER
			LOOSE IN BOX
			l _t = 5.0 ±1.0 mm
			C-tol = ±10%
Pitch = 15.0 ±0.4 mm; d _t = 0.80 ±0.08 mm			
0.047 0.056 0.068 0.082 0.1	5.0 × 11.0 × 17.5	1.1	2222 373 51 473 2222 373 51 563 2222 373 51 683 2222 373 51 823 2222 373 51 104
0.12 0.15	6.0 × 12.0 × 17.5	1.4	2222 373 51 124 2222 373 51 154
0.18 0.22	7.0 × 13.5 × 17.5	1.9	2222 373 51 184 2222 373 51 224
0.27 0.33	8.5 × 15.0 × 17.5	2.6	2222 373 51 274 2222 373 51 334
Pitch = 22.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
0.39 0.47	8.5 × 18.0 × 26.0	4.4	2222 373 51 394 2222 373 51 474
0.56 0.68	10.0 × 19.5 × 26.0	4.4 5.5	2222 373 51 564 2222 373 51 684
Pitch = 27.5 ±0.4 mm; d _t = 0.80 ±0.08 mm			
0.82 1	11.0 × 21.0 × 31.0	7.8	2222 373 51 824 2222 373 51 105
1.2 1.5	15.0 × 25.0 × 31.0	12.8	2222 373 51 125 2222 373 51 155

Metallized polyester film capacitors

MKT 370/371/372/373

CONSTRUCTION

Description

- Low-inductive wound cell of metallized polyethylene terephthalate (PETP) film, potted with epoxy resin in a flame-retardant case
- Radial leads, solder-coated
- Small stand-off pips allow removal of solder flux etc. during cleaning of the printed-circuit board.

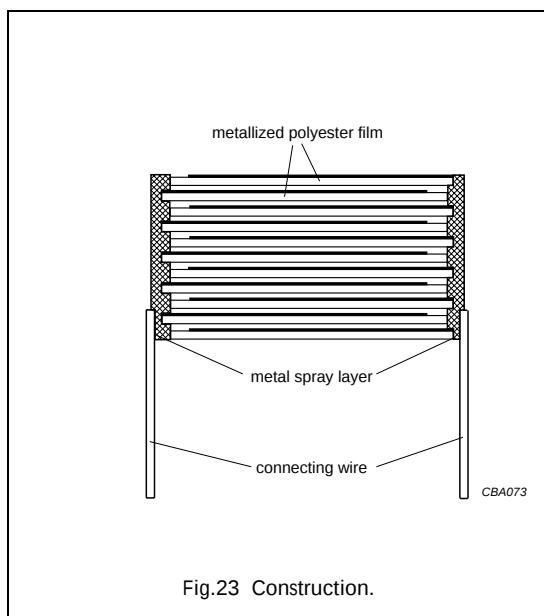


Fig.23 Construction.

Mounting

NORMAL USE

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting on printed-circuit boards by automatic insertion machines.

For detailed tape specifications refer to this handbook, chapter "Packaging information".

SPECIFIC METHOD OF MOUNTING TO WITHSTAND VIBRATION AND SHOCK

In order to withstand vibration and shock tests, it must be ensured that the stand-off pips are in good contact with the printed-circuit board:

- For pitches of ≤ 15 mm capacitors shall be mechanically fixed by the leads.
- For larger pitches the capacitors shall be mounted in the same way and the body clamped.

SPACE REQUIREMENTS ON PRINTED-CIRCUIT BOARD

The maximum length and width of film capacitors is shown in Fig.24:

- Eccentricity see Fig.24. The maximum eccentricity is smaller than or equal to the wire diameter of the product concerned.
- Product height with seating plane as given by "IEC 60717" as reference: $h_{\max} \leq h + 0.3$ mm.

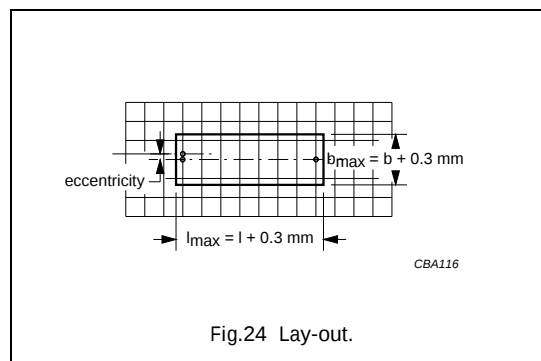


Fig.24 Lay-out.

Storage temperature

- Storage temperature: $T_{\text{stg}} = -25$ to $+40$ °C with RH maximum 80% without condensation.

RATINGS AND CHARACTERISTICS REFERENCE CONDITIONS

Unless otherwise specified, all electrical values apply to an ambient free air temperature of 23 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of $50 \pm 2\%$.



For reference testing, a conditioning period shall be applied over 96 ± 4 hours by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20%.

Metallized polyester film capacitors

MKT 370/371/372/373

CHARACTERISTICS


Capacitance

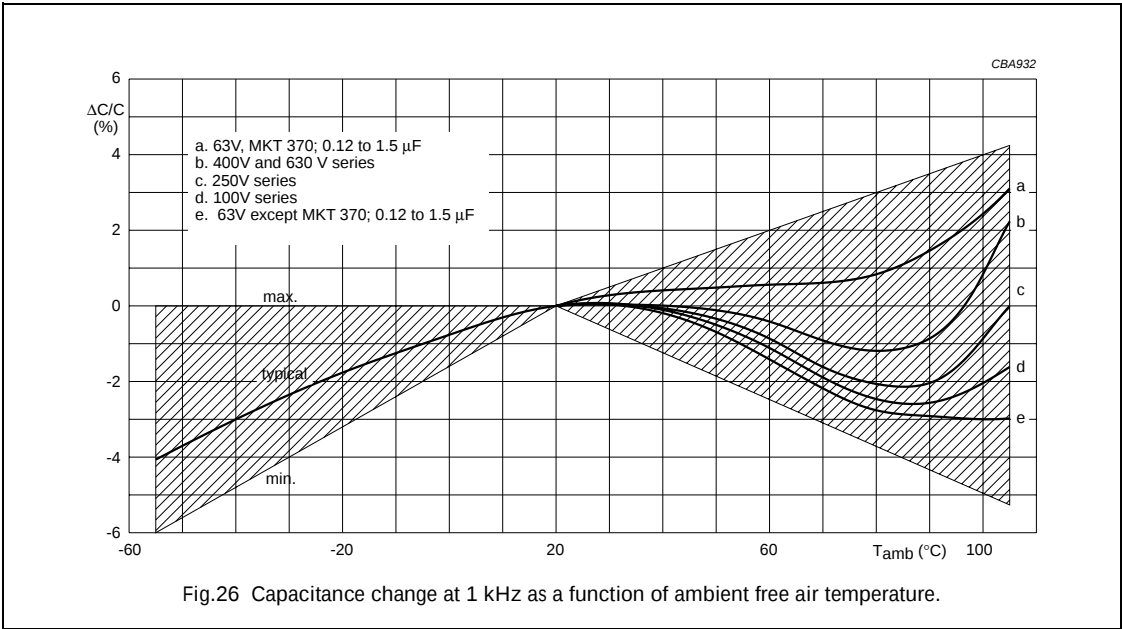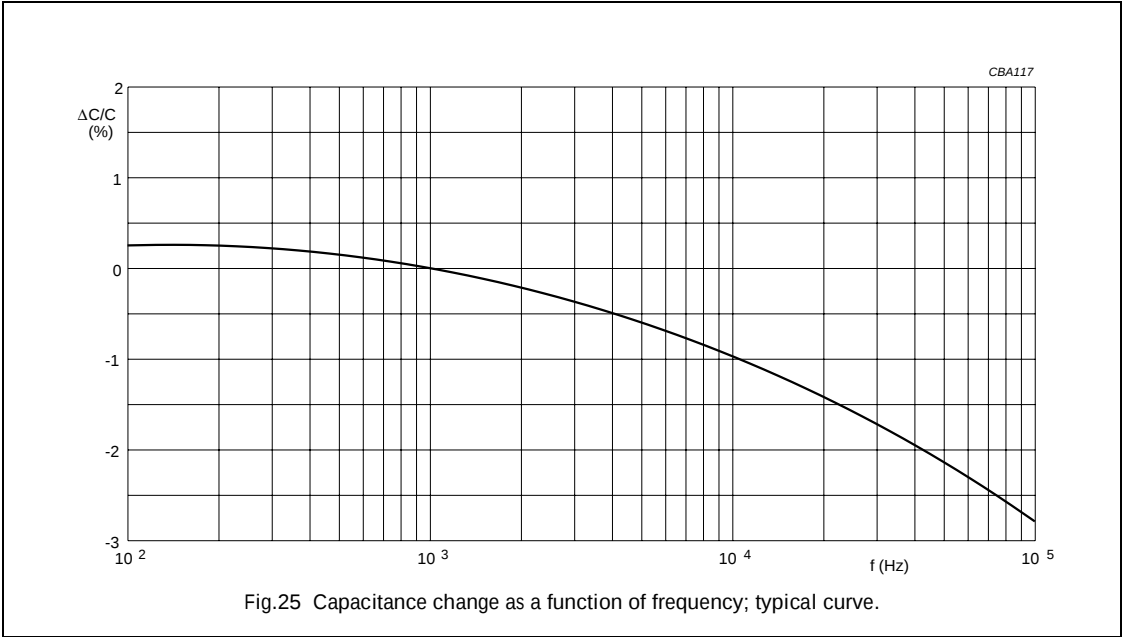


Metallized polyester film capacitors

MKT 370/371/372/373

Impedance

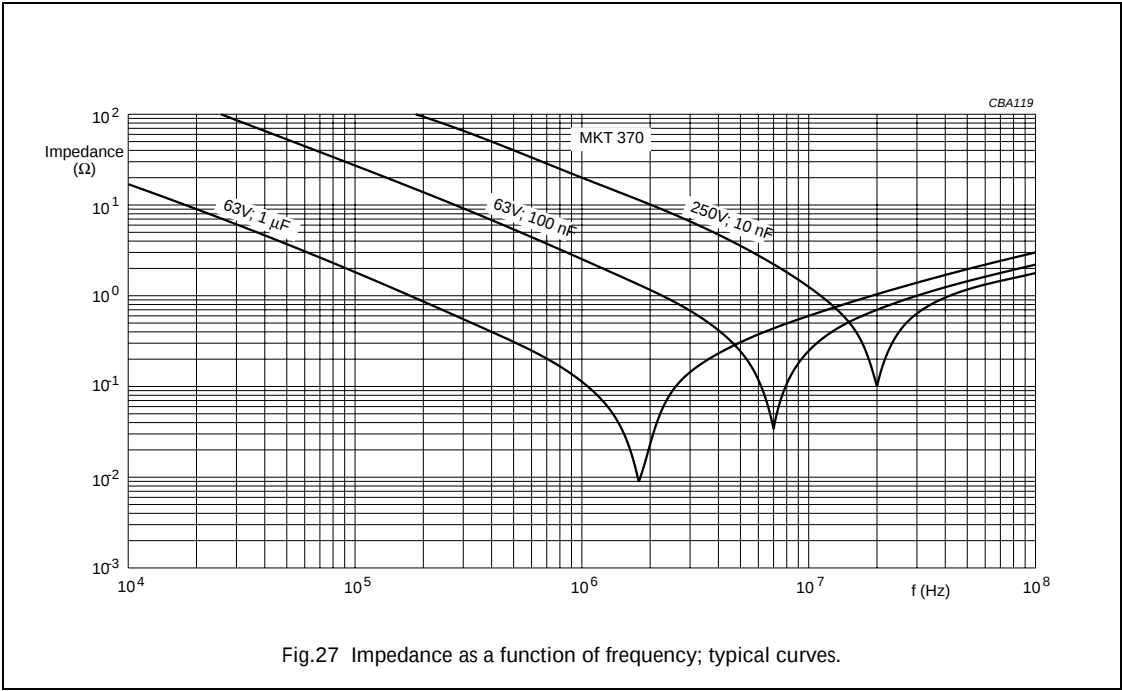



Maximum DC and AC voltage as a function of temperature

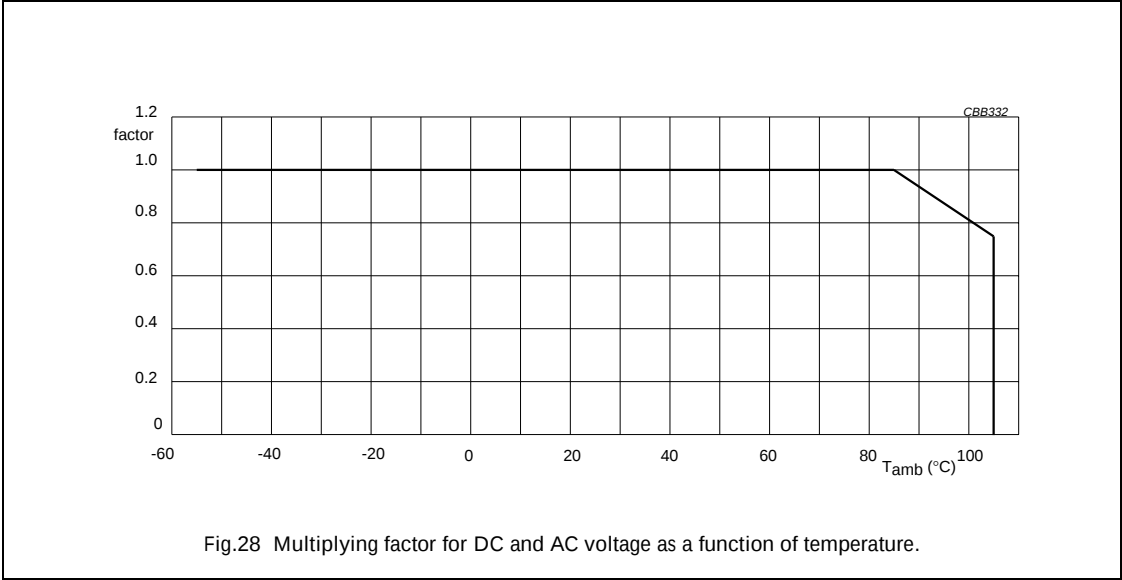

Metallized polyester film capacitors



MKT 370/371/372/373

Maximum RMS voltage (sinewave) as a function of frequency

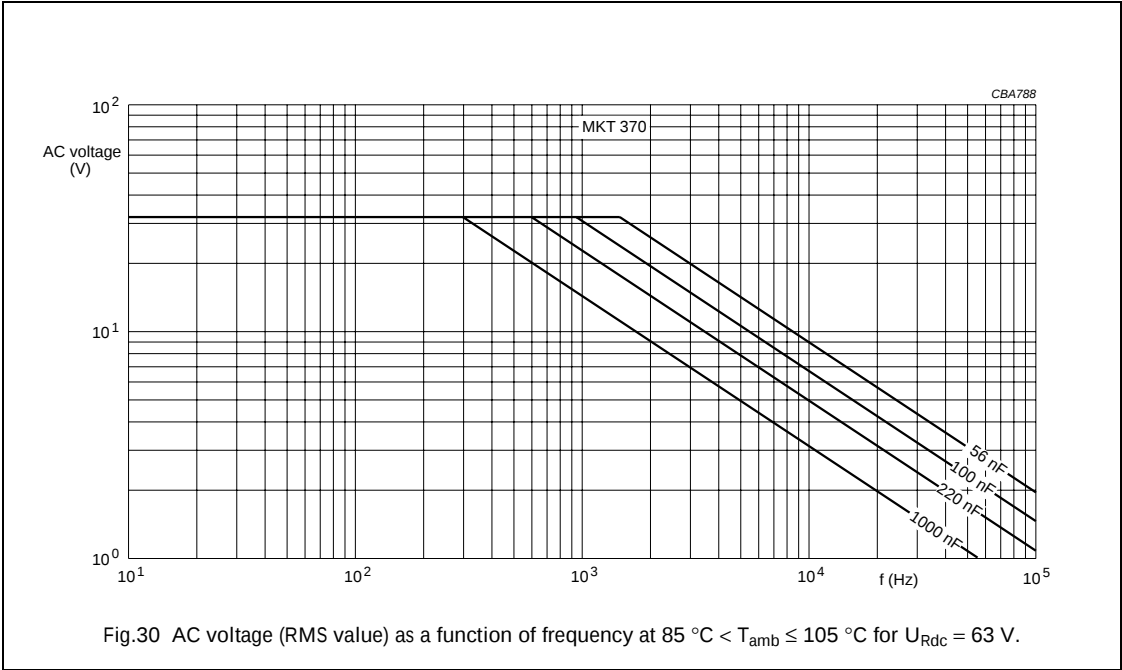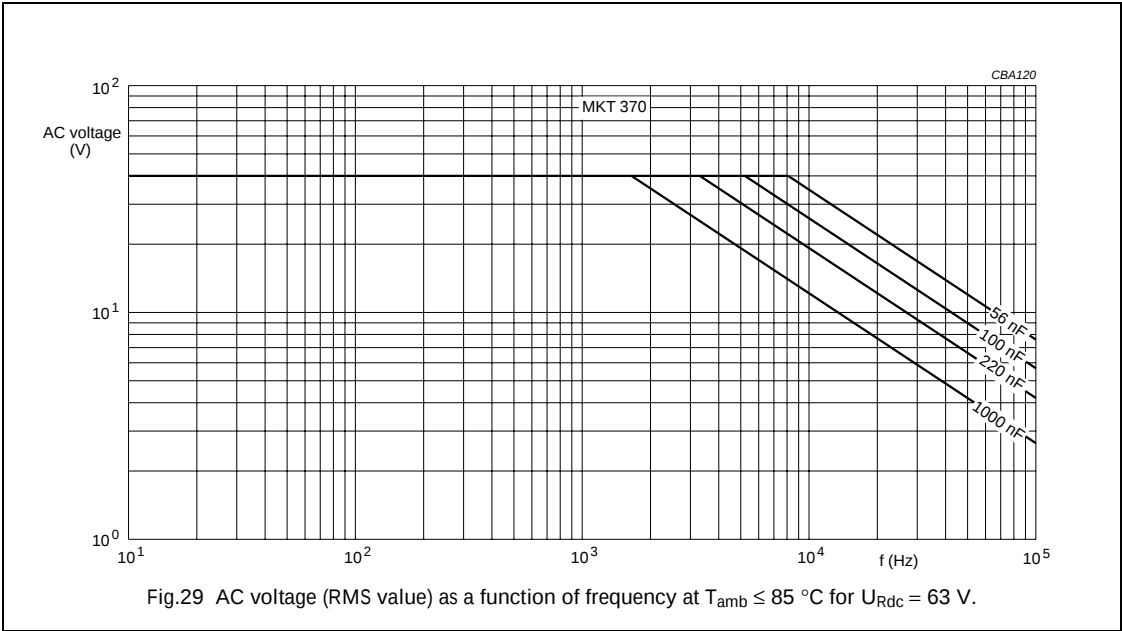



Metallized polyester film capacitors

MKT 370/371/372/373

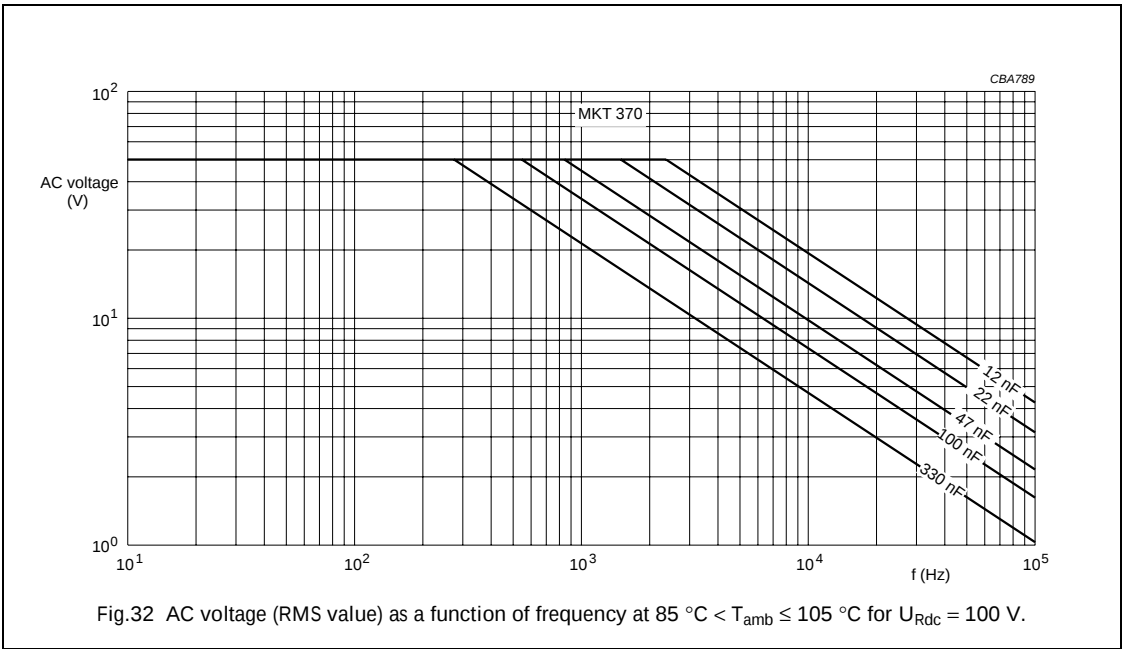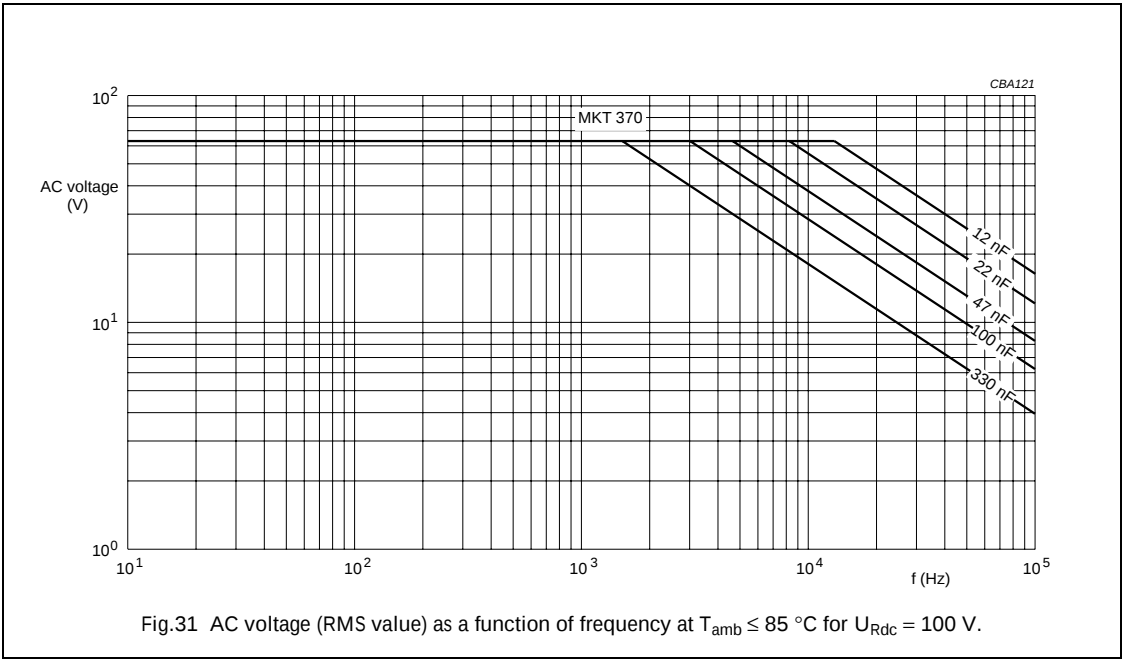



Metallized polyester film capacitors

MKT 370/371/372/373

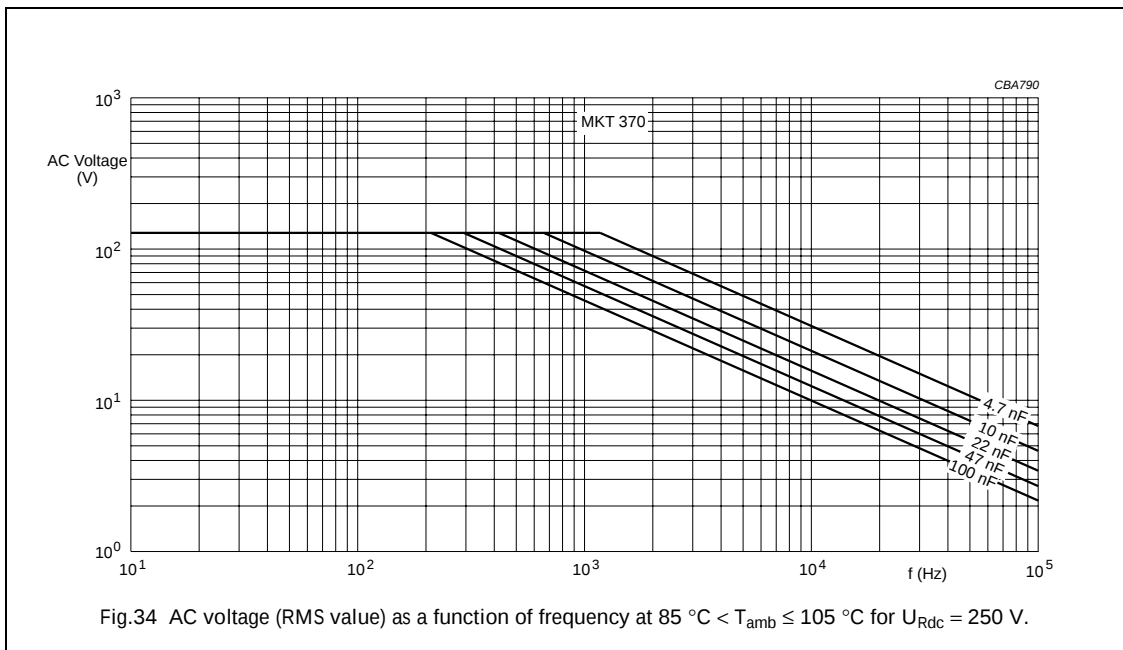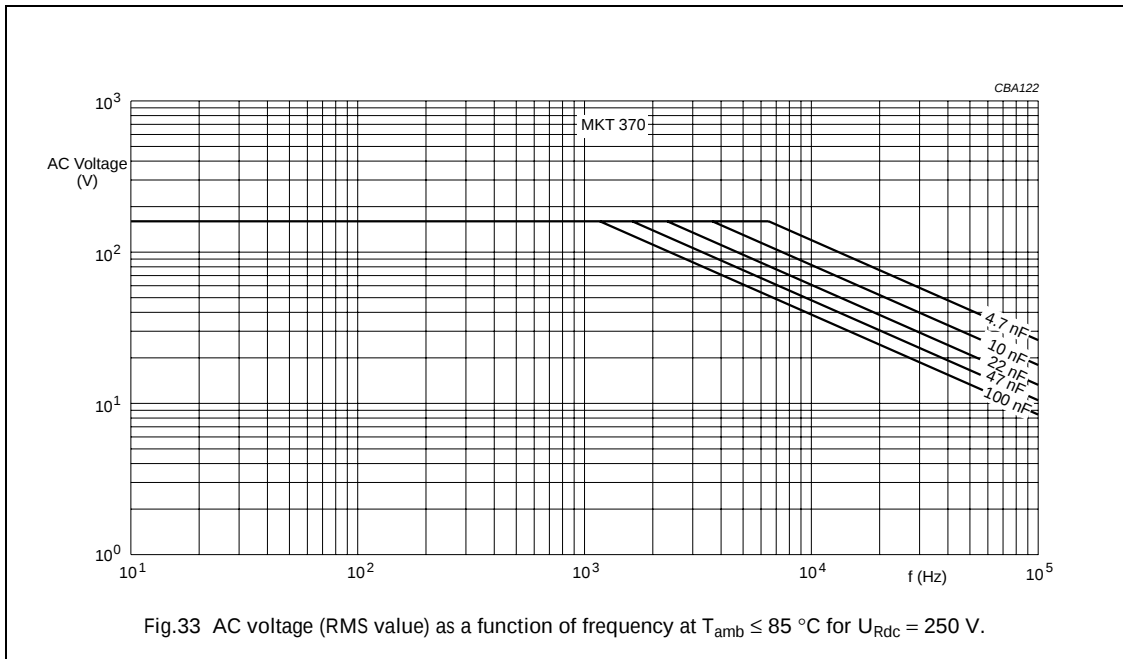



Metallized polyester film capacitors

MKT 370/371/372/373

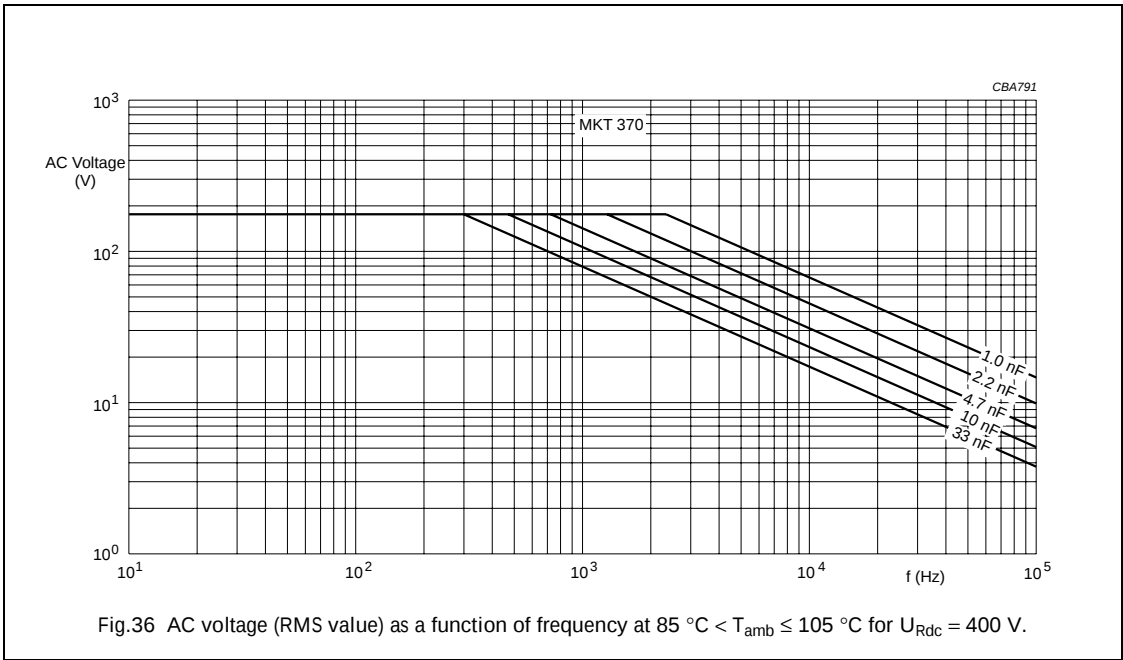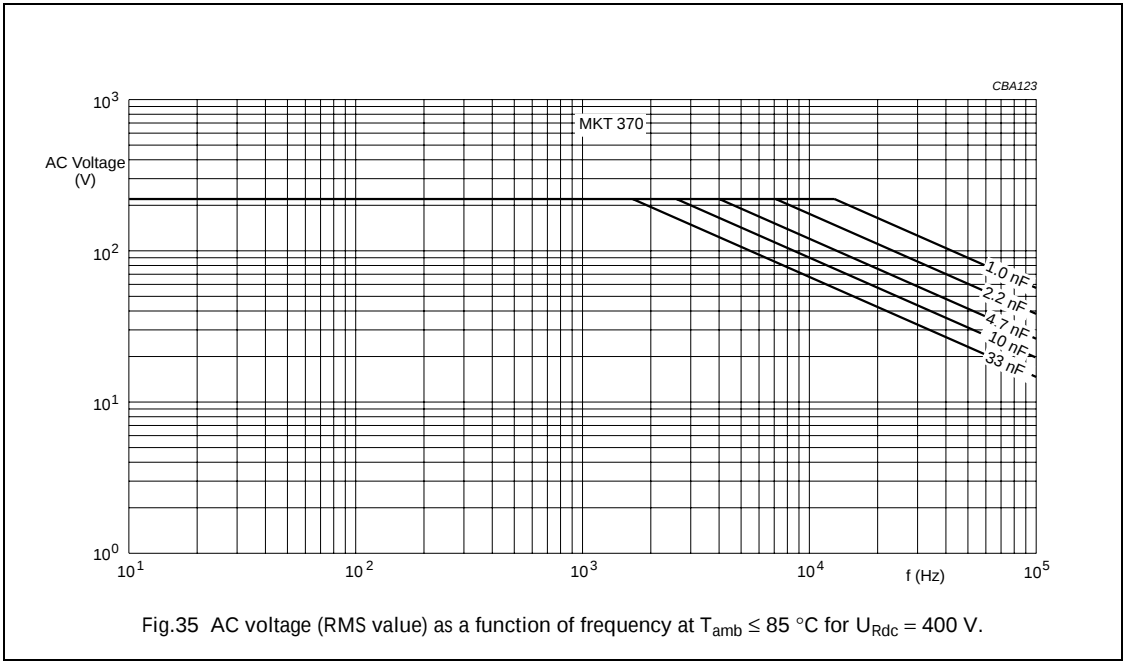



Metallized polyester film capacitors

MKT 370/371/372/373

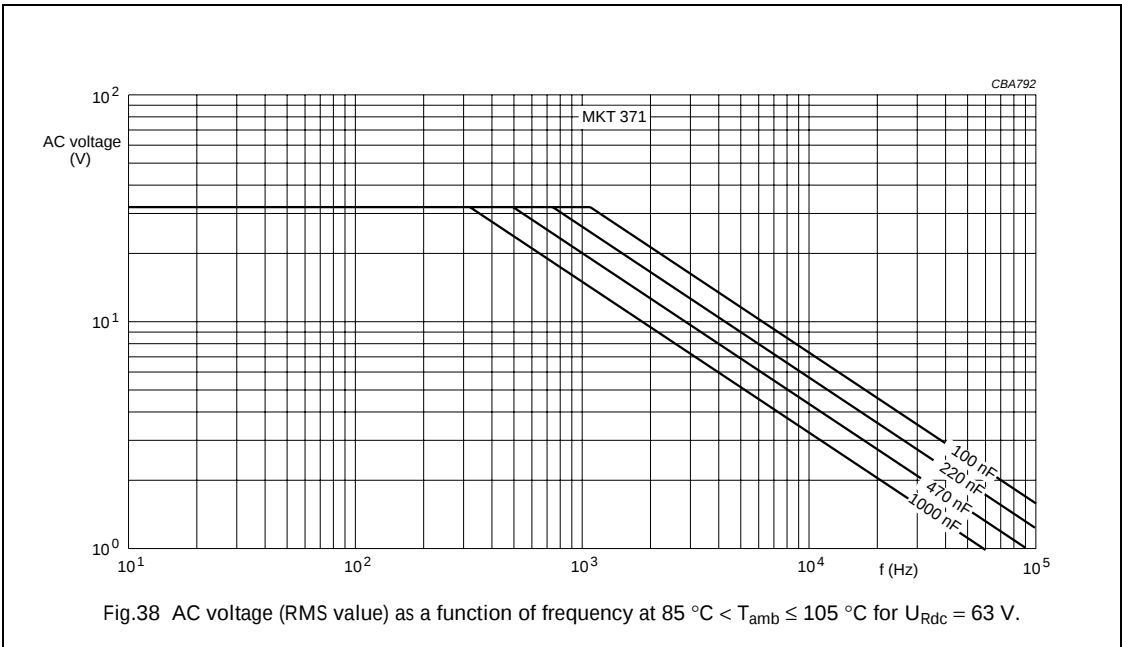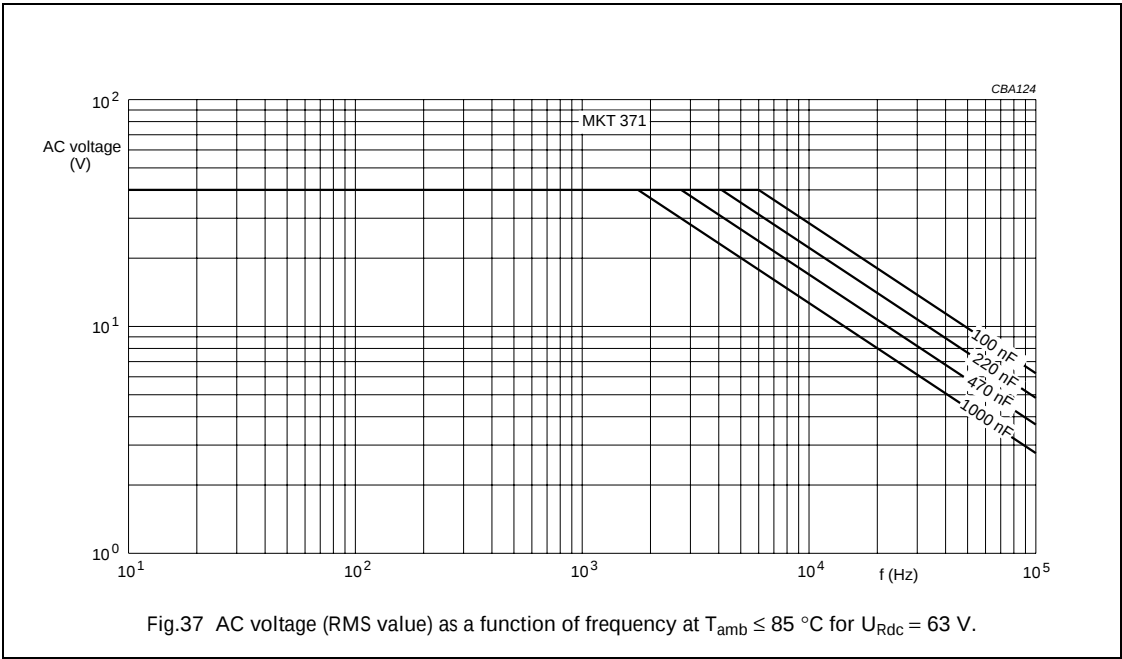



Metallized polyester film capacitors

MKT 370/371/372/373

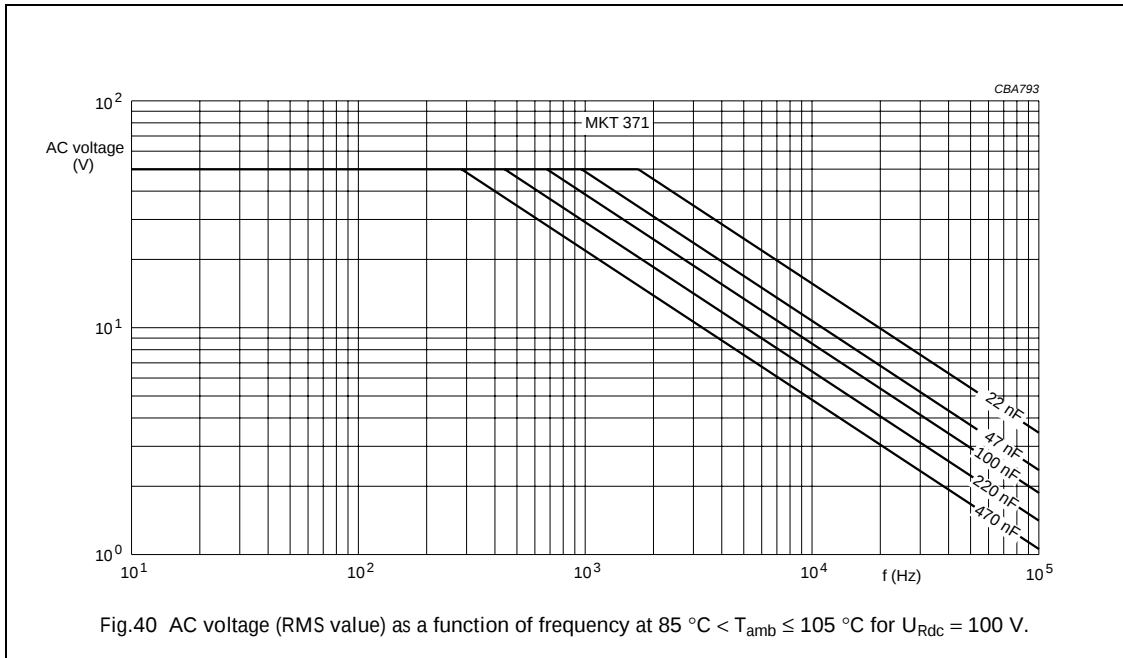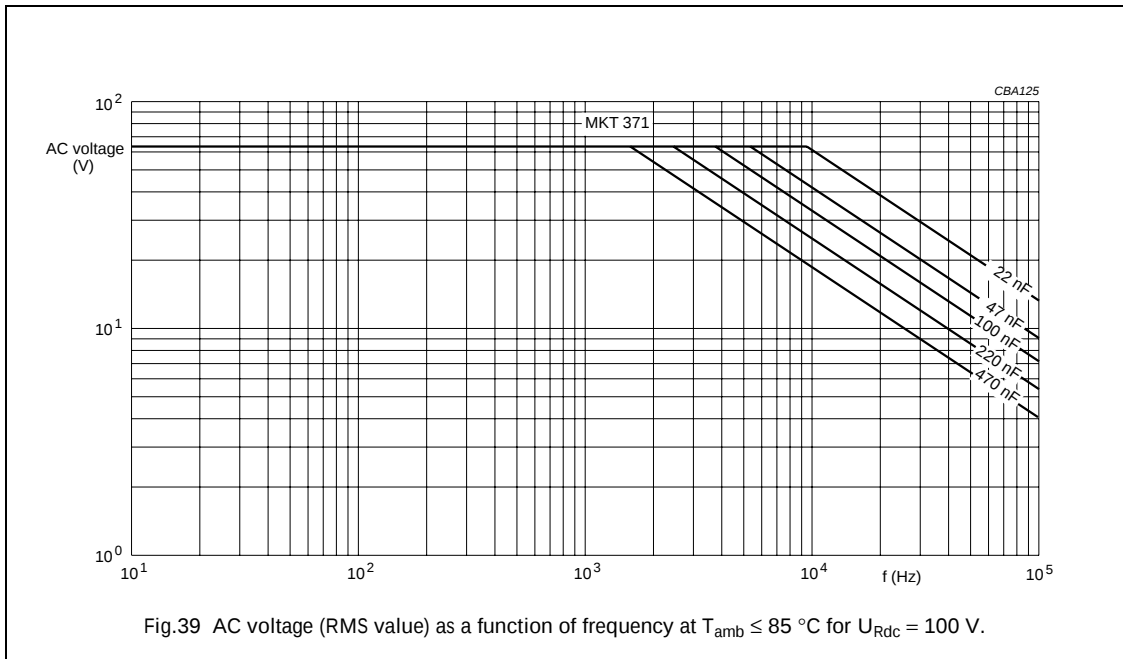



Metallized polyester film capacitors

MKT 370/371/372/373

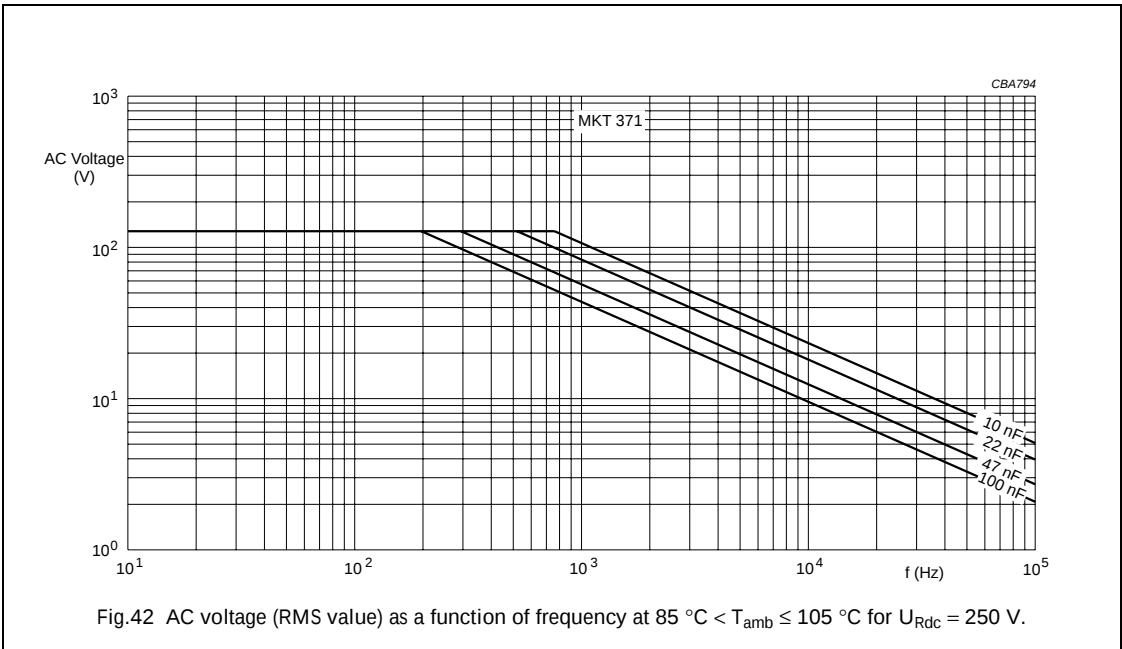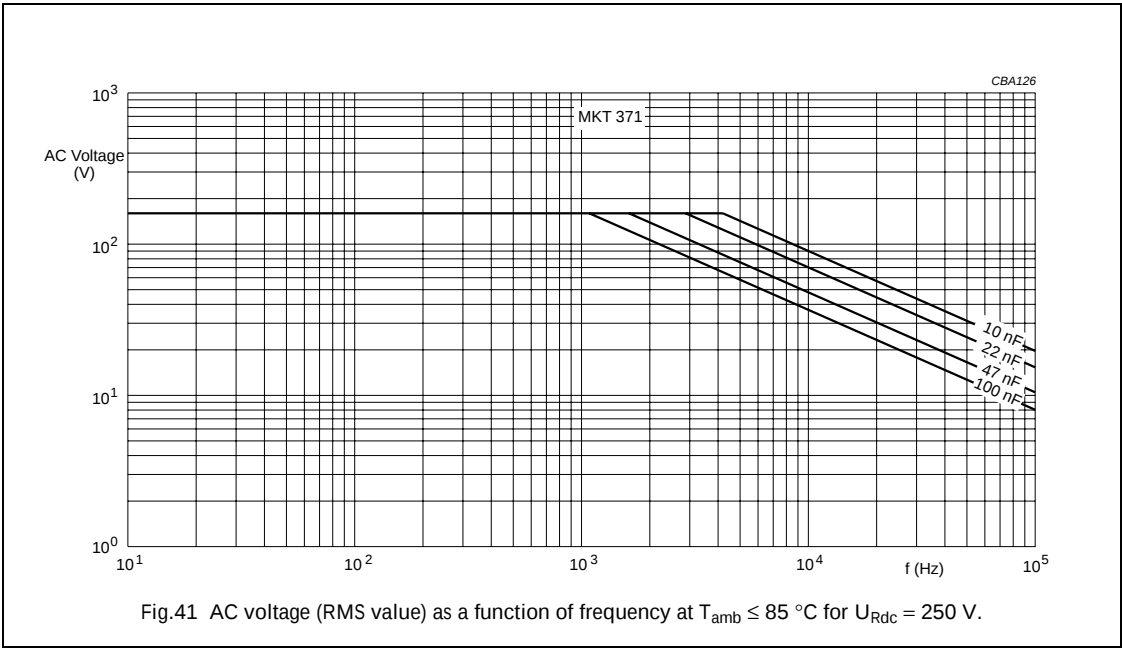



Metallized polyester film capacitors

MKT 370/371/372/373

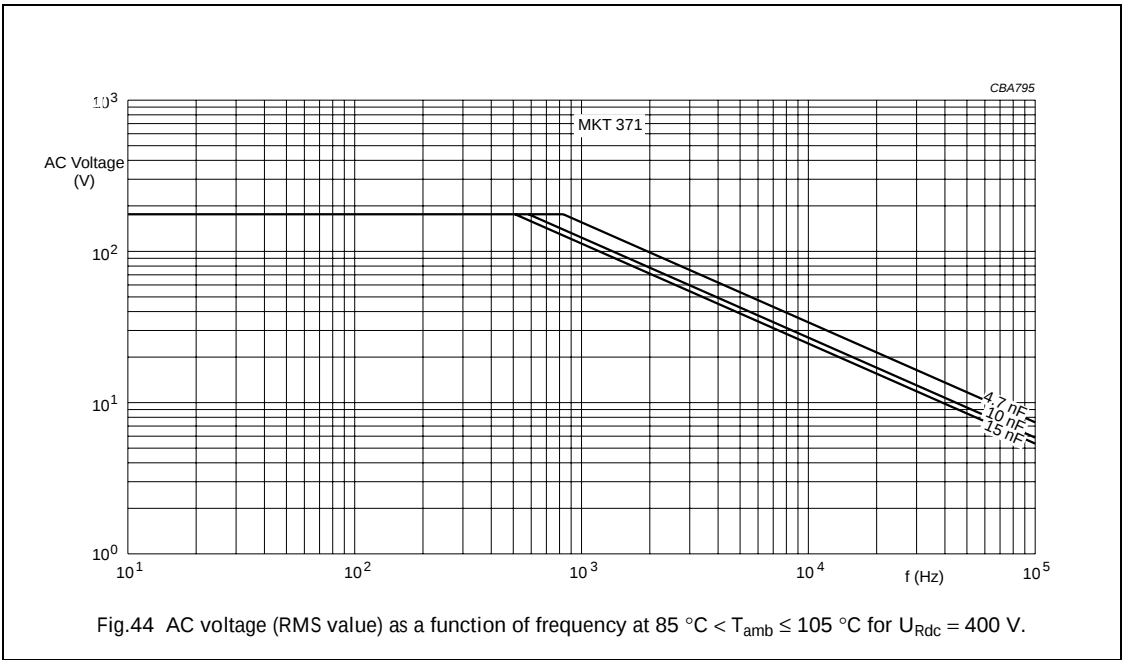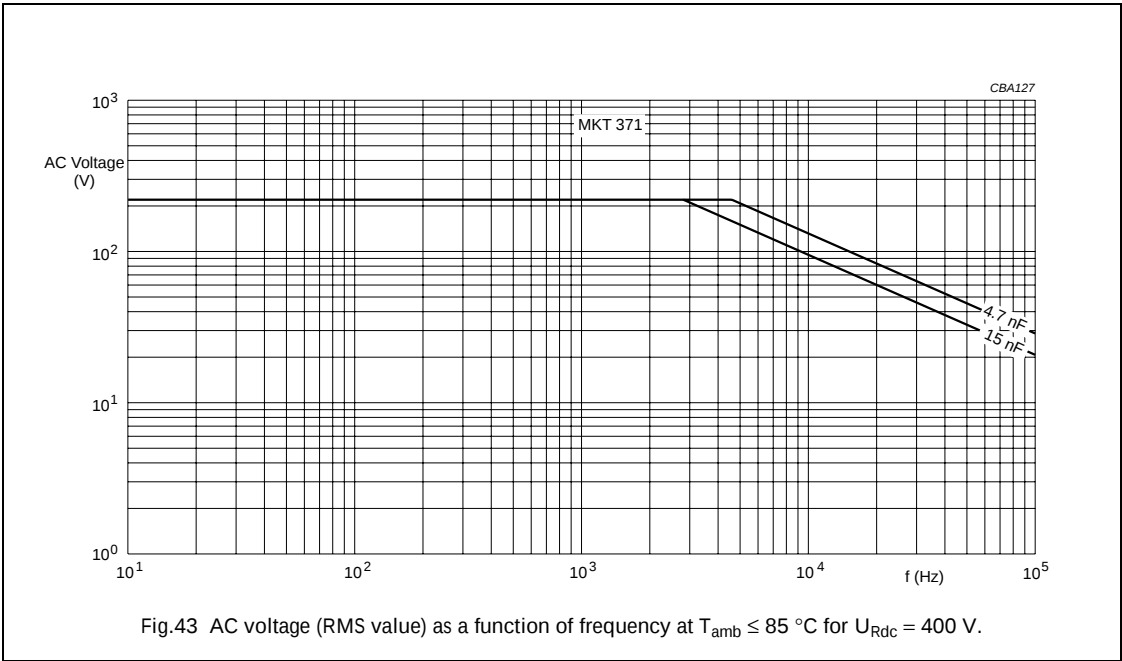



Metallized polyester film capacitors

MKT 370/371/372/373

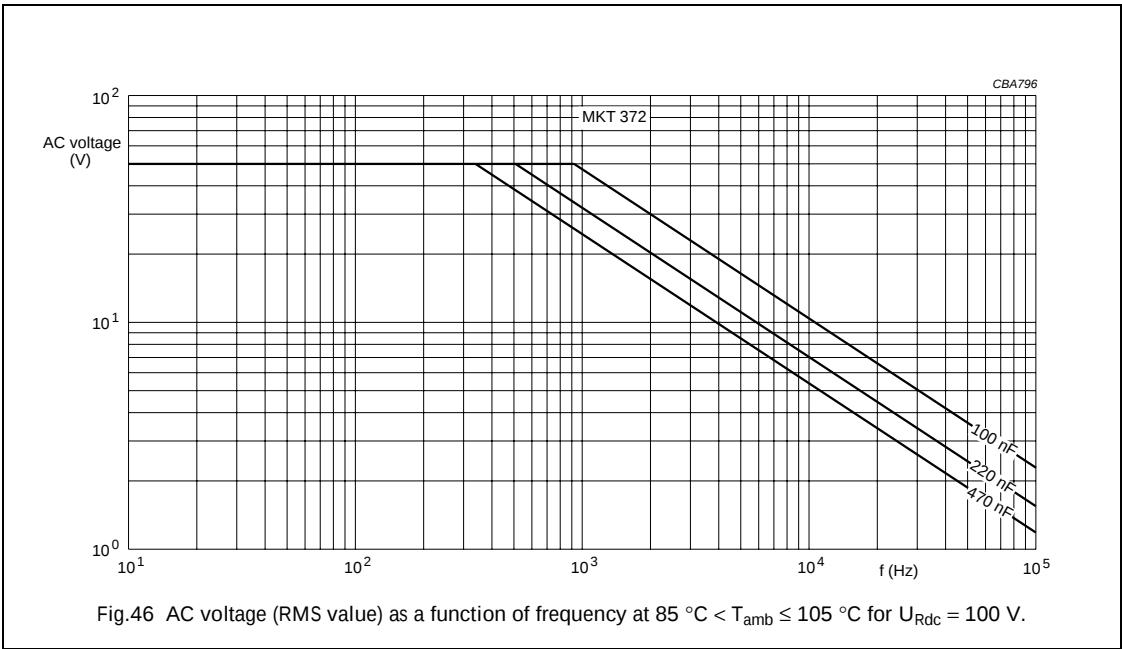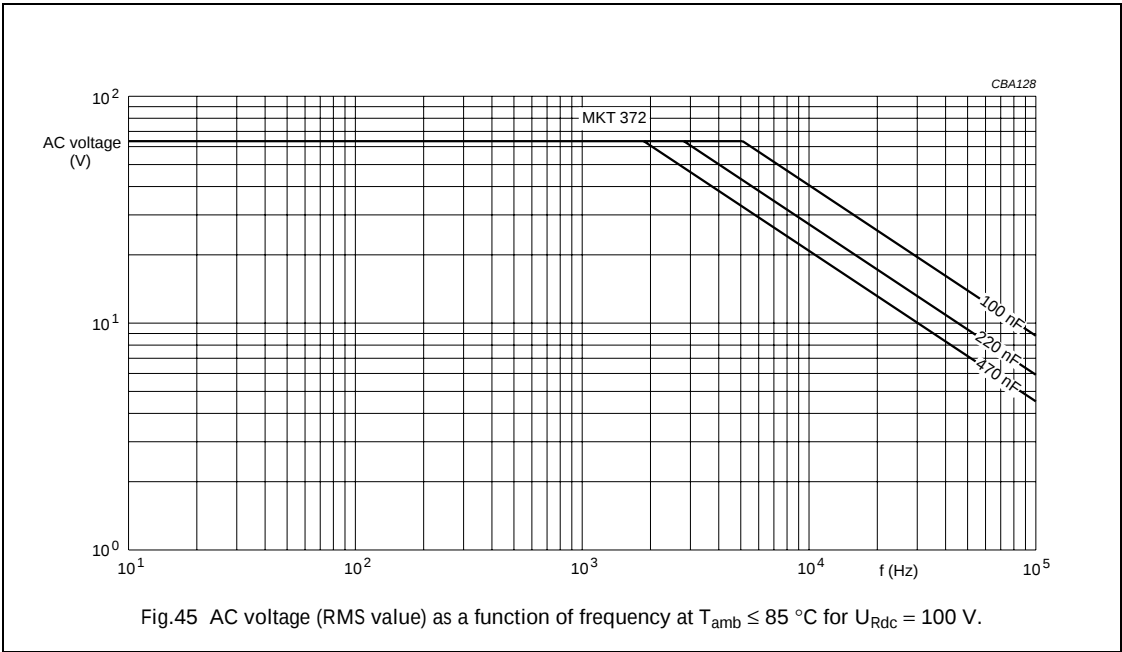



Metallized polyester film capacitors

MKT 370/371/372/373

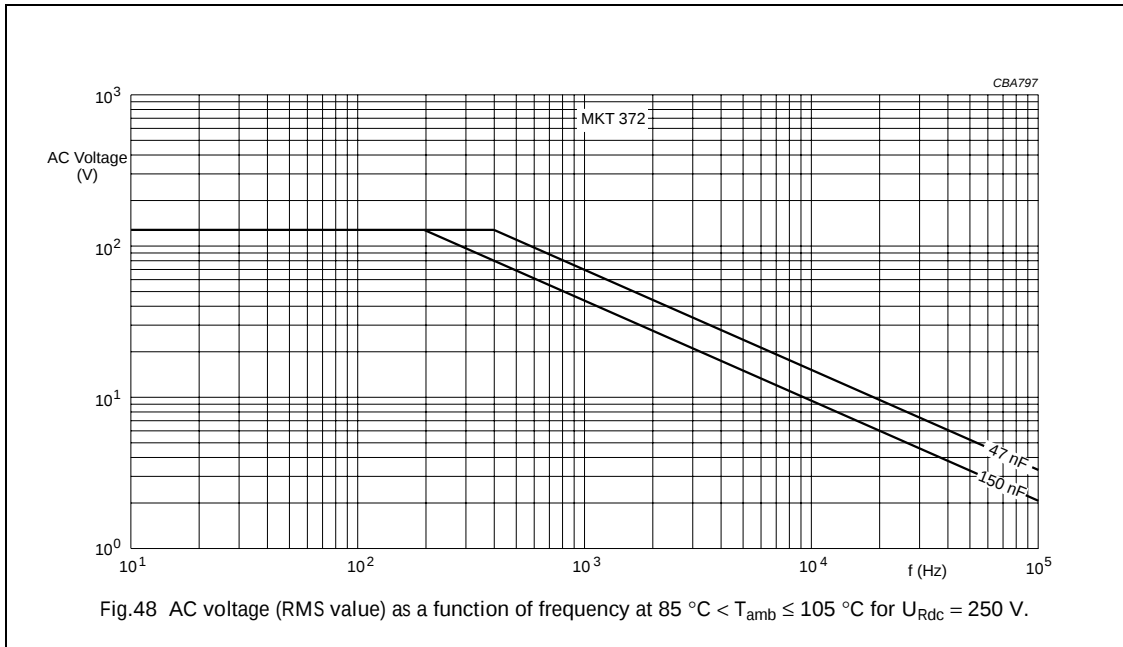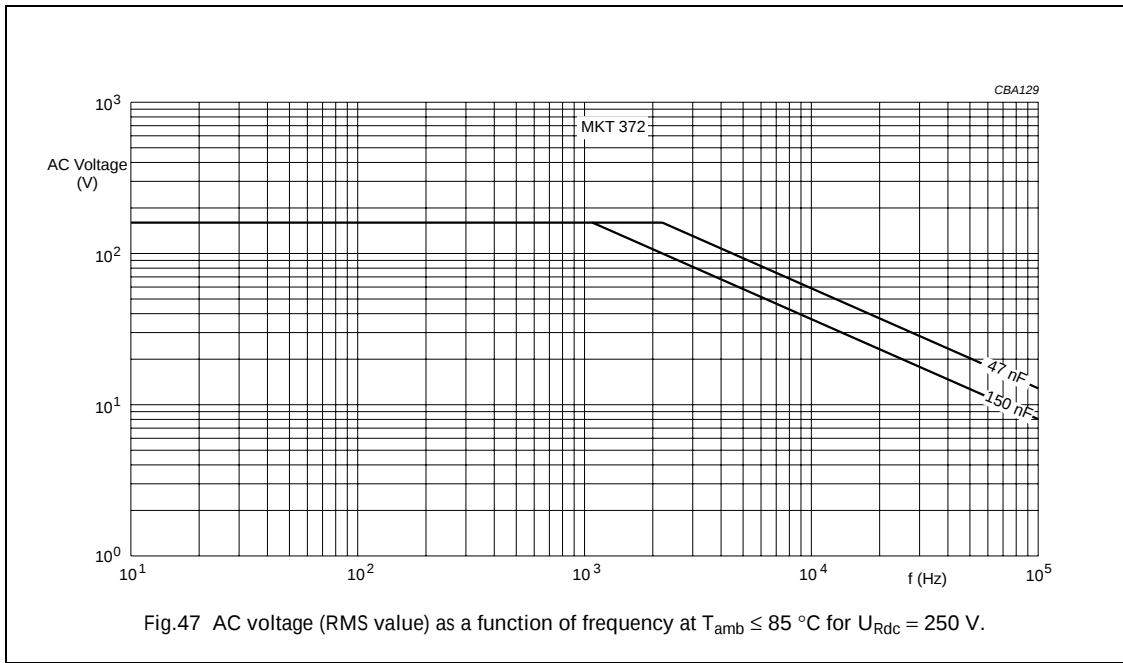



Metallized polyester film capacitors

MKT 370/371/372/373

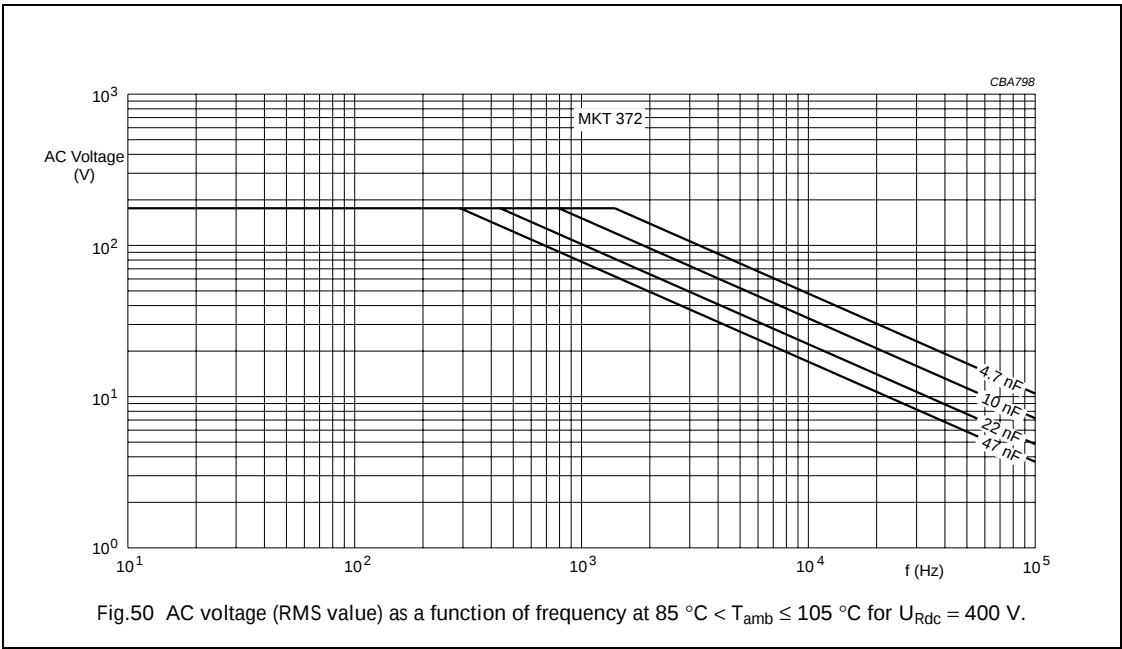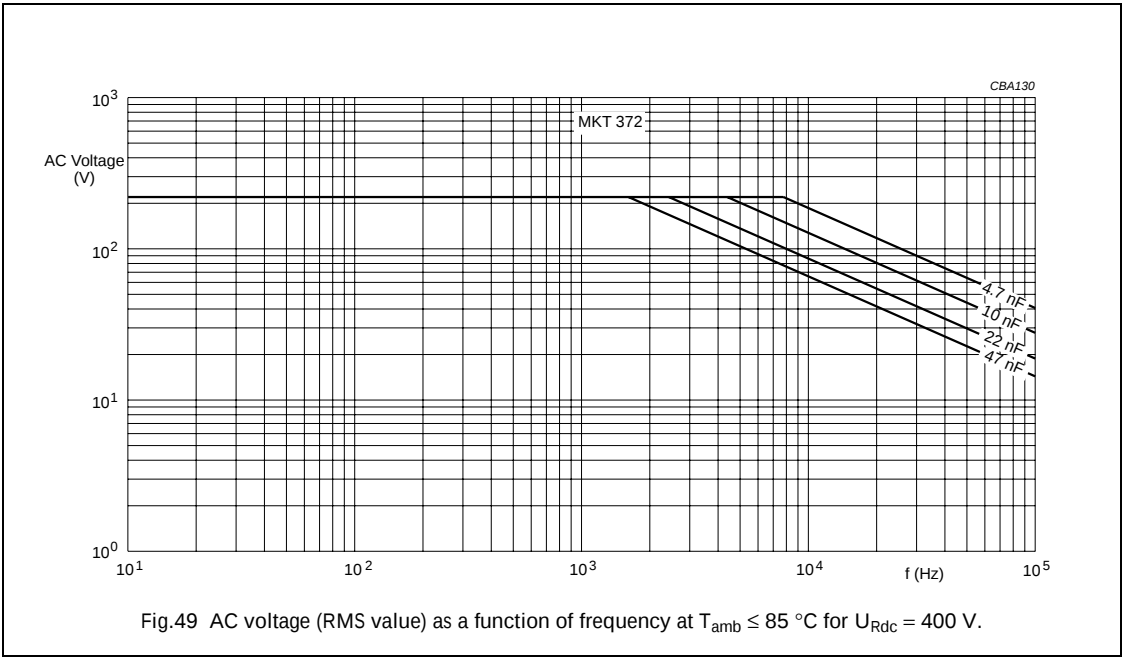



Metallized polyester film capacitors

MKT 370/371/372/373

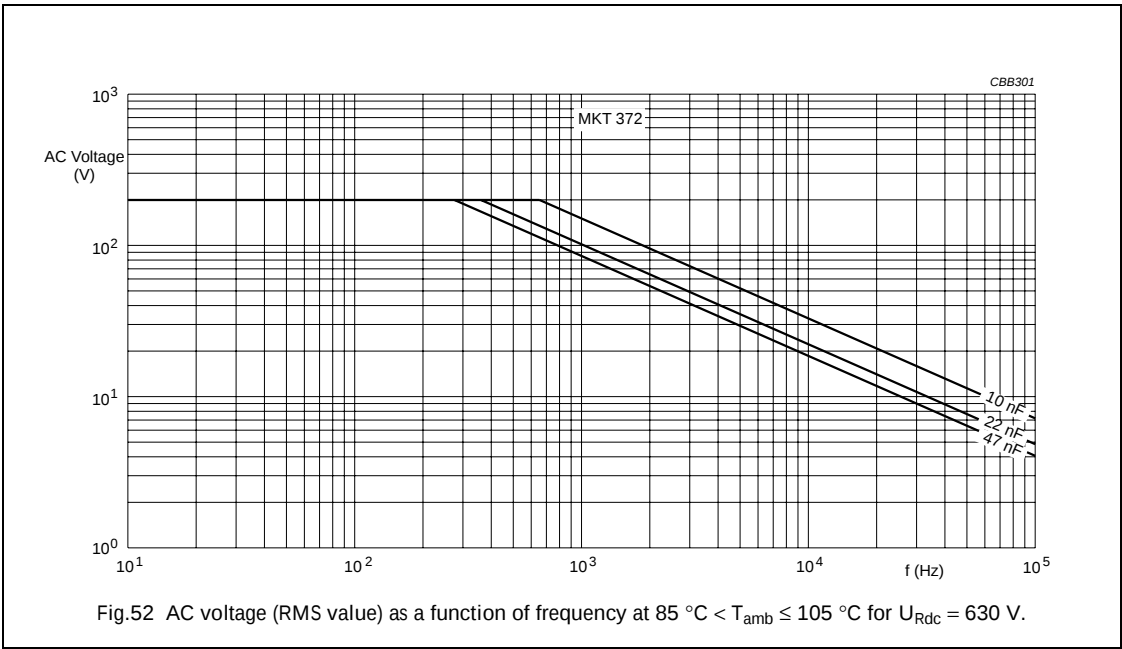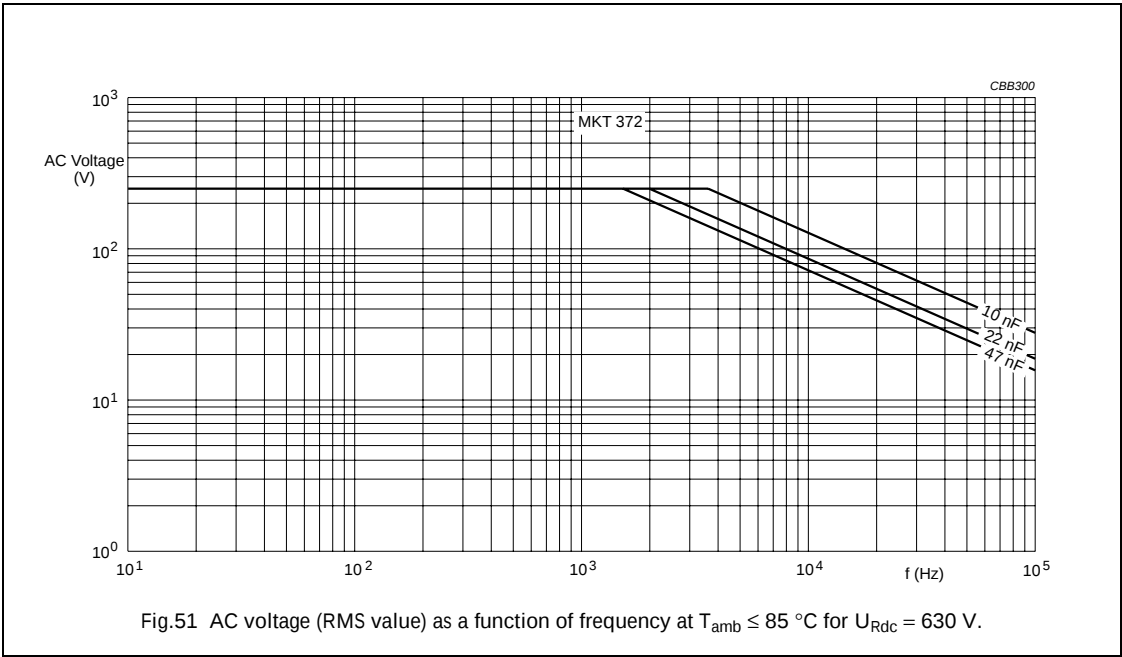



Metallized polyester film capacitors

MKT 370/371/372/373

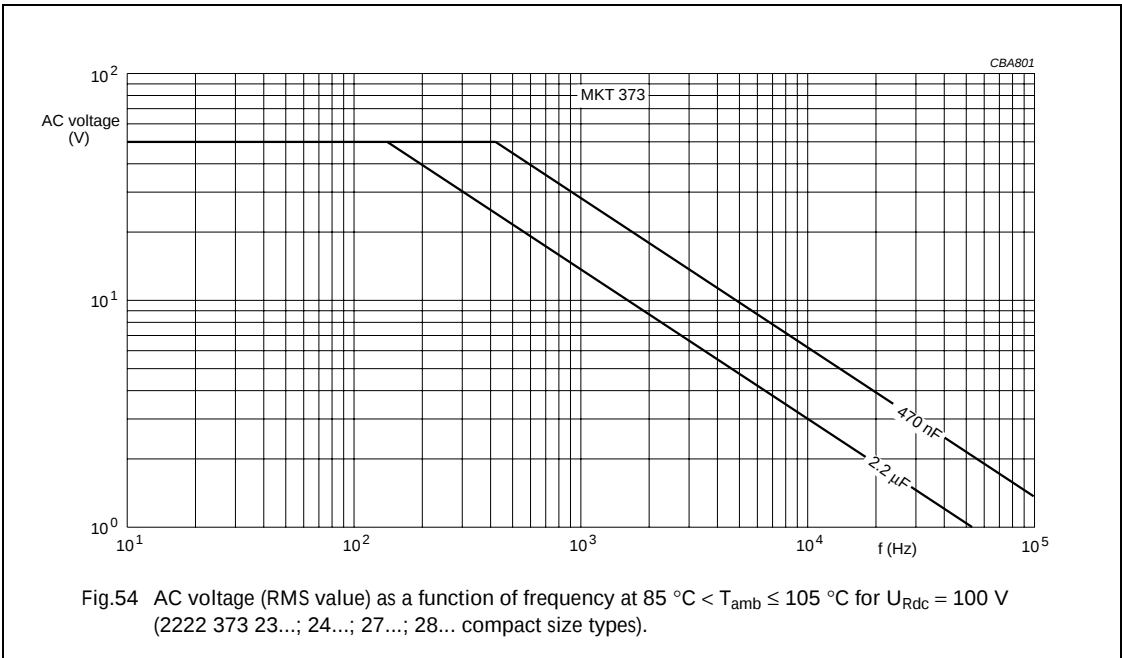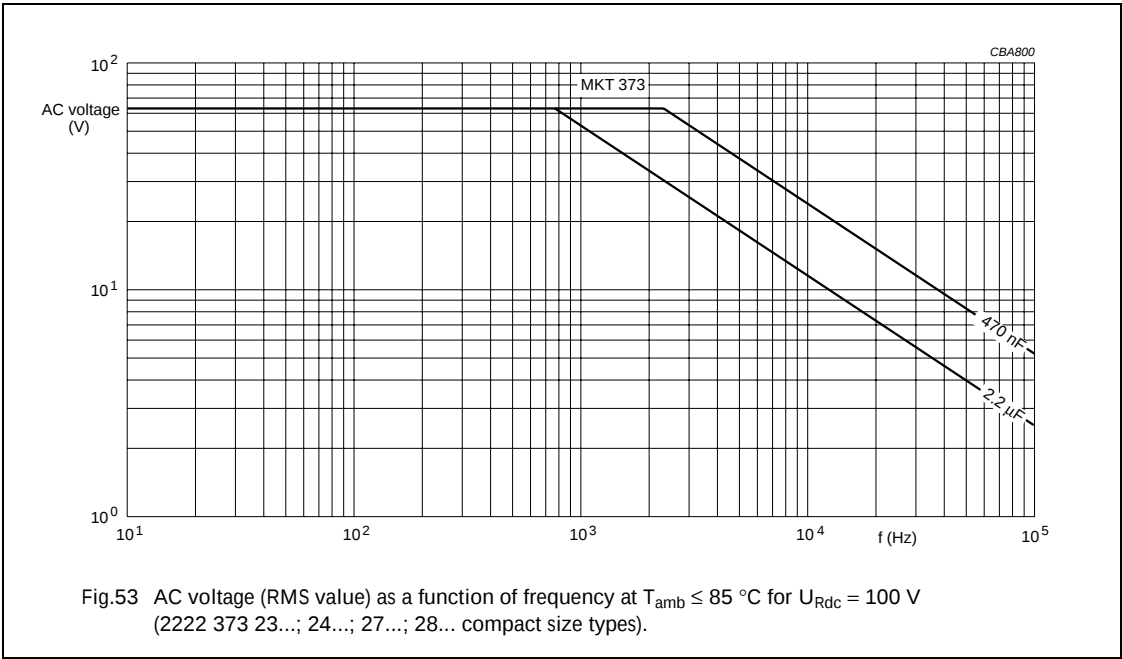



Metallized polyester film capacitors

MKT 370/371/372/373

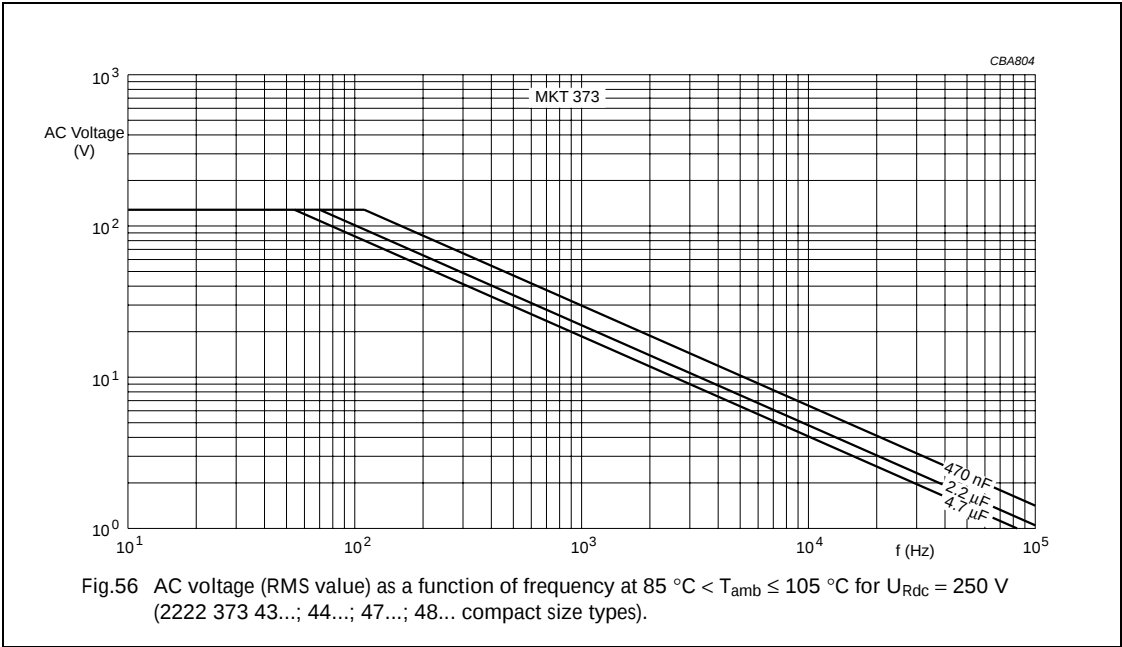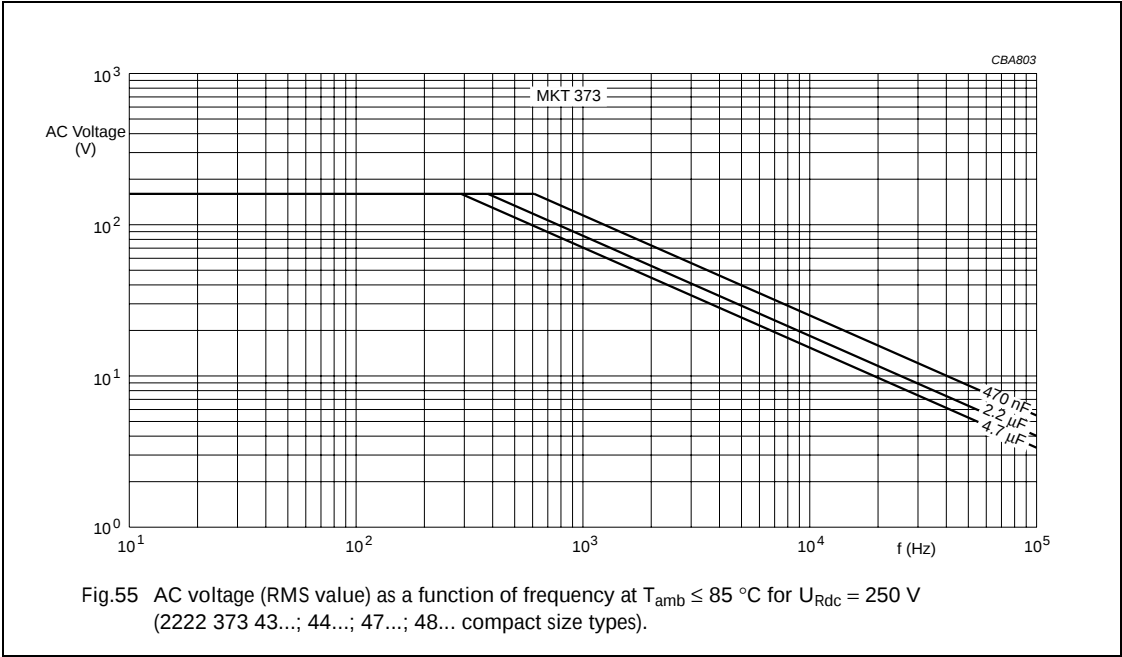



Metallized polyester film capacitors

MKT 370/371/372/373

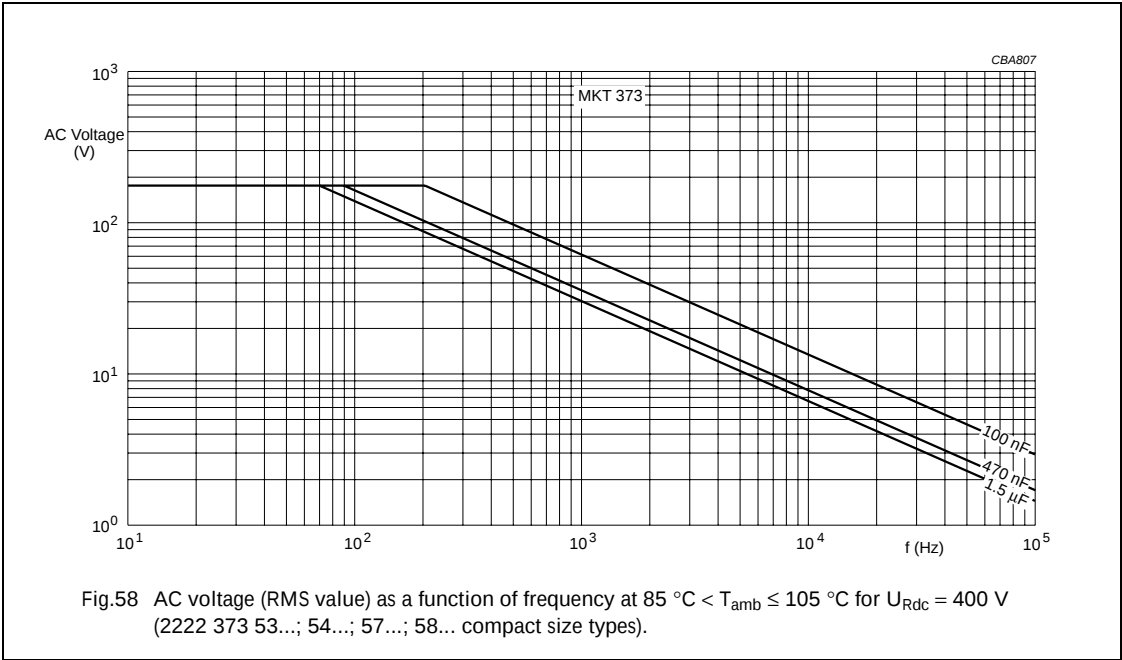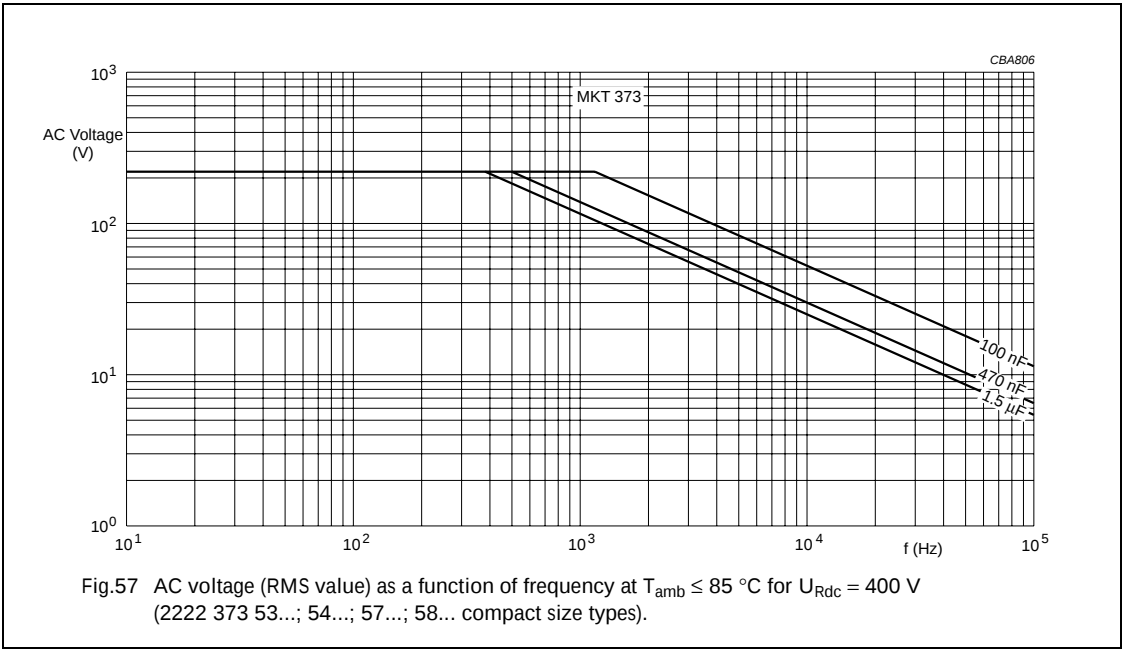



Metallized polyester film capacitors

MKT 370/371/372/373

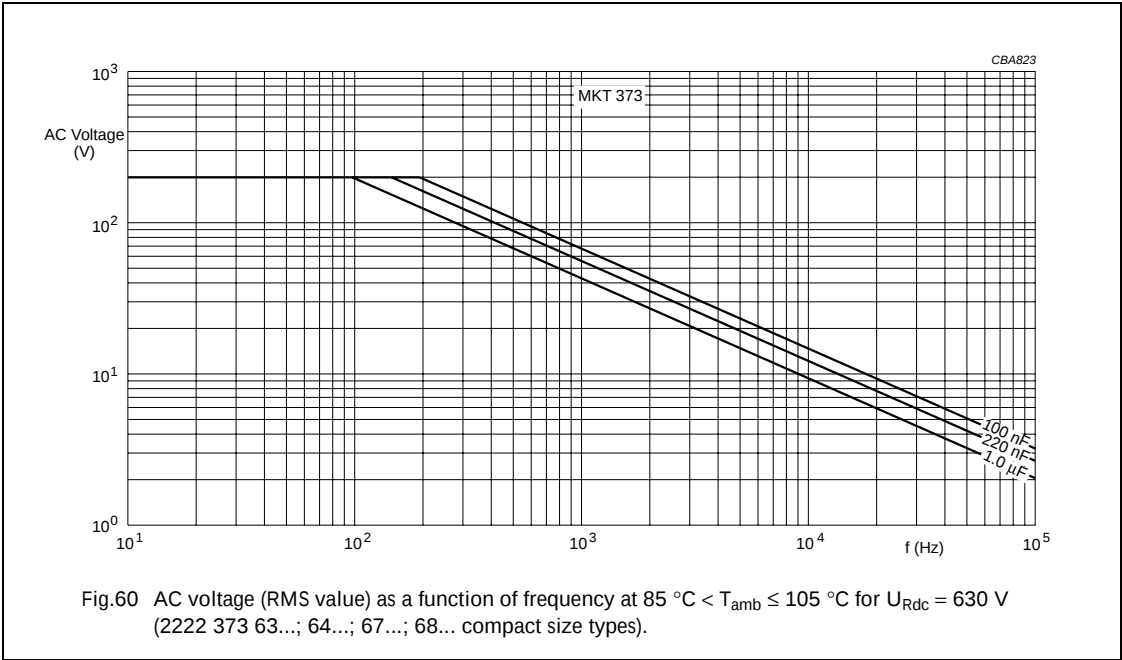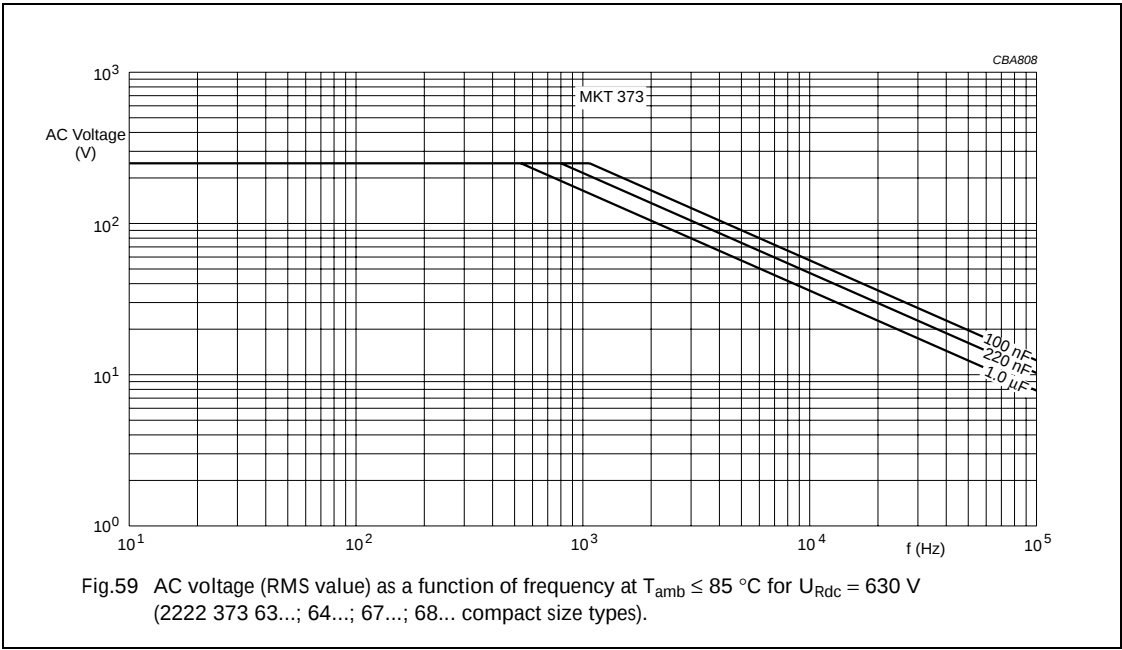



Metallized polyester film capacitors

MKT 370/371/372/373

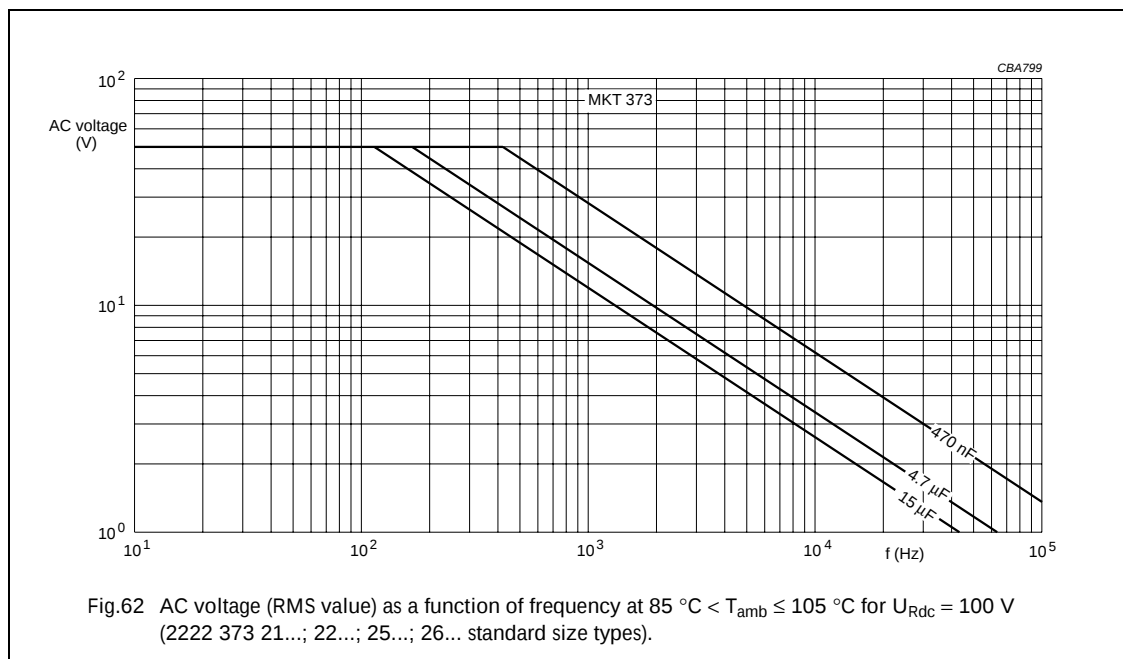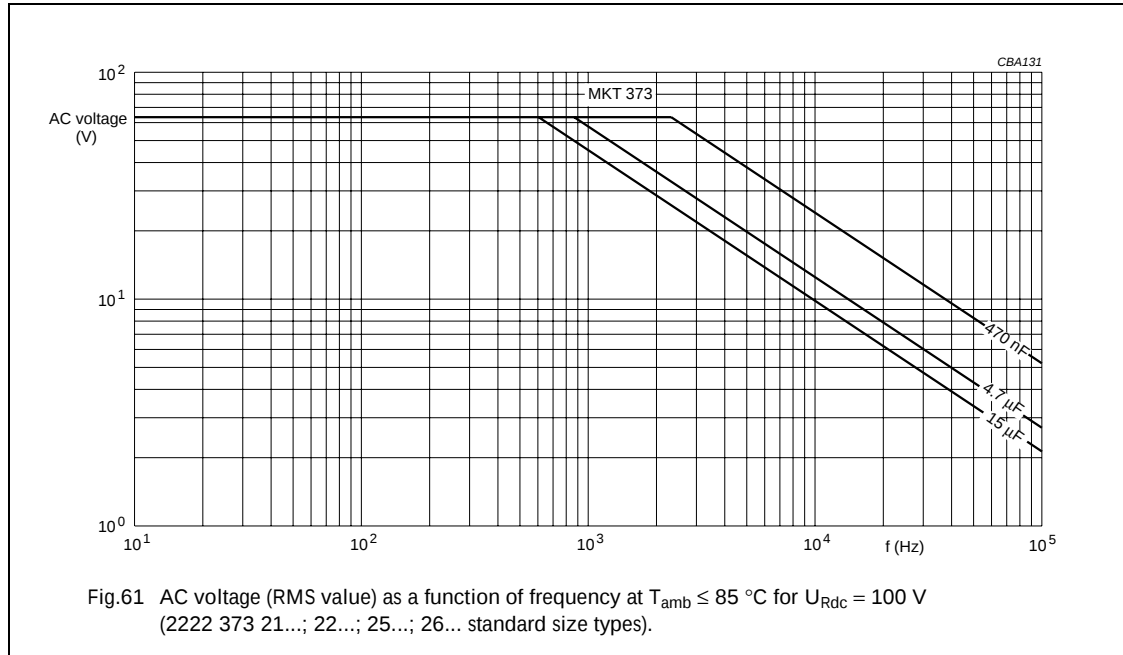



Metallized polyester film capacitors

MKT 370/371/372/373

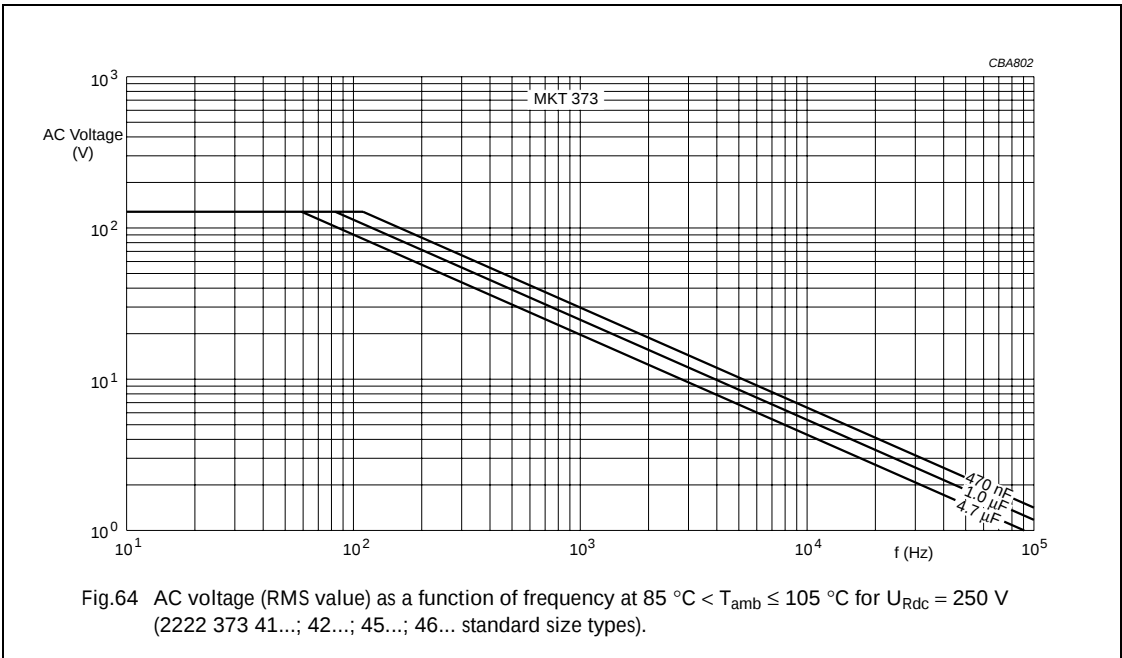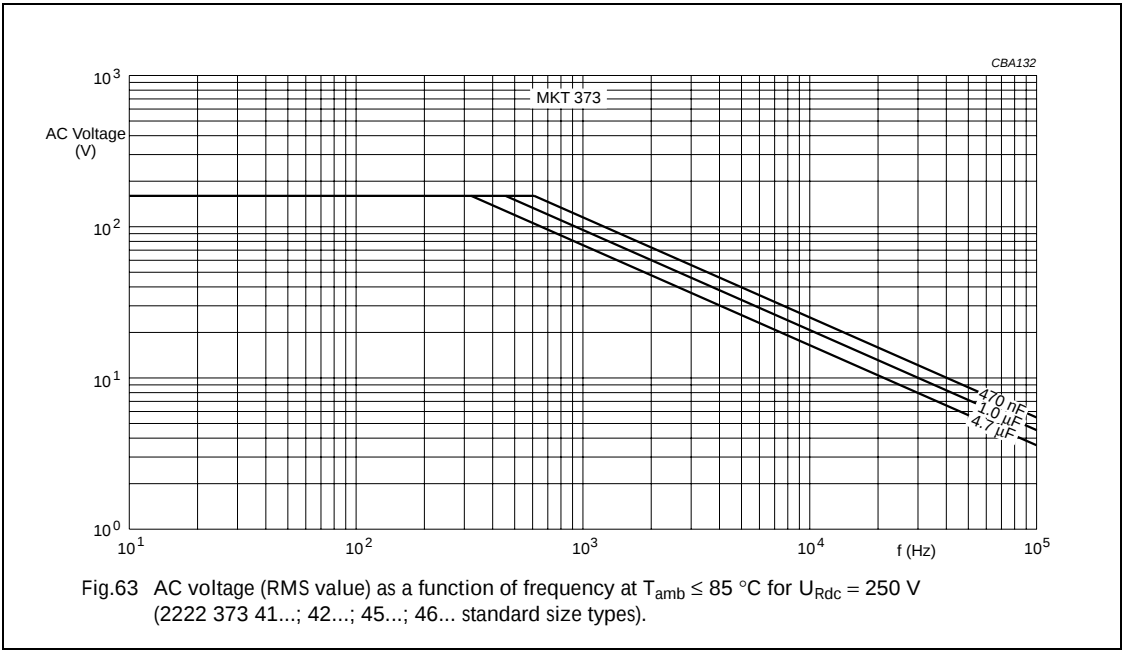

Metallized polyester film capacitors

MKT 370/371/372/373

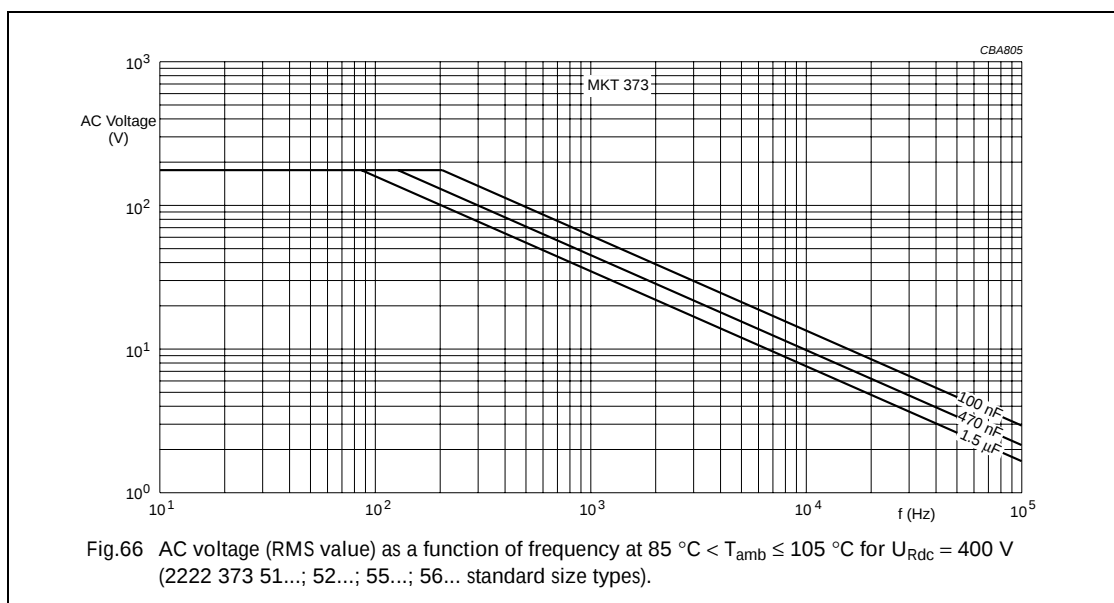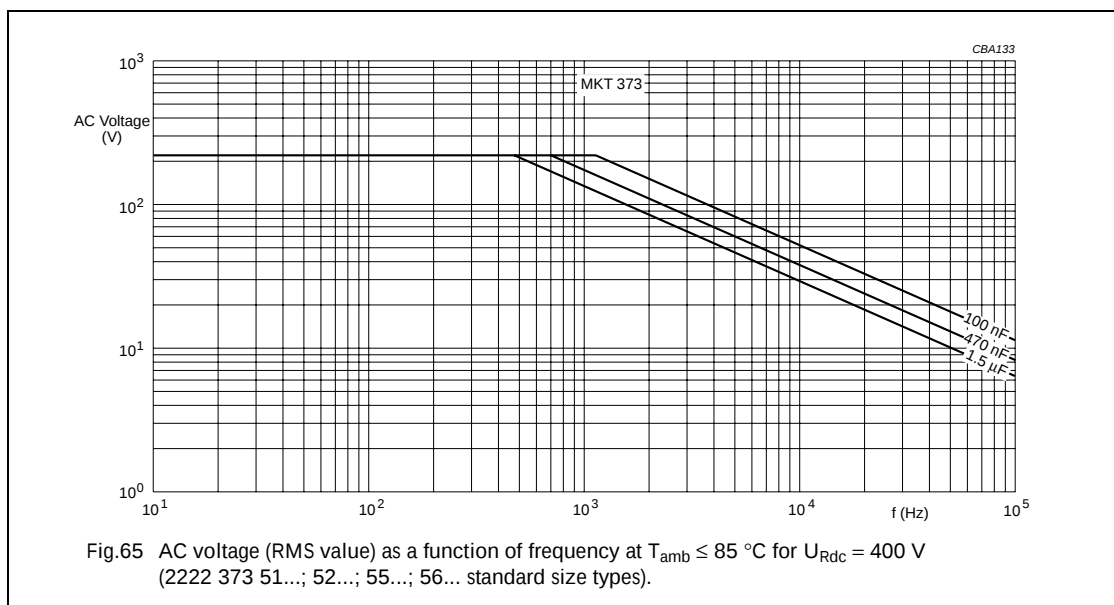

Maximum RMS current (sinewave) as a function of frequency


The maximum RMS current is defined by $I_{ac} = \omega \times C \times U_{ac}$.

U_{ac} is the maximum AC voltage depending on the ambient temperature in Figs 29 to 66.


Metallized polyester film capacitors

MKT 370/371/372/373

Tangent of loss angle

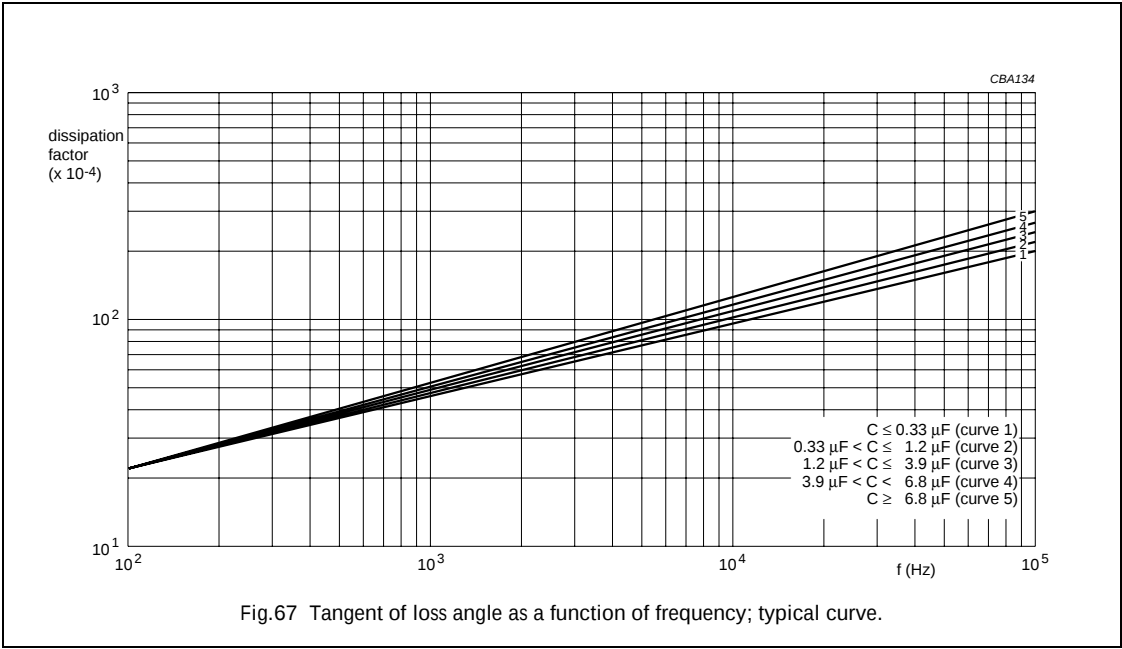

Insulation resistance

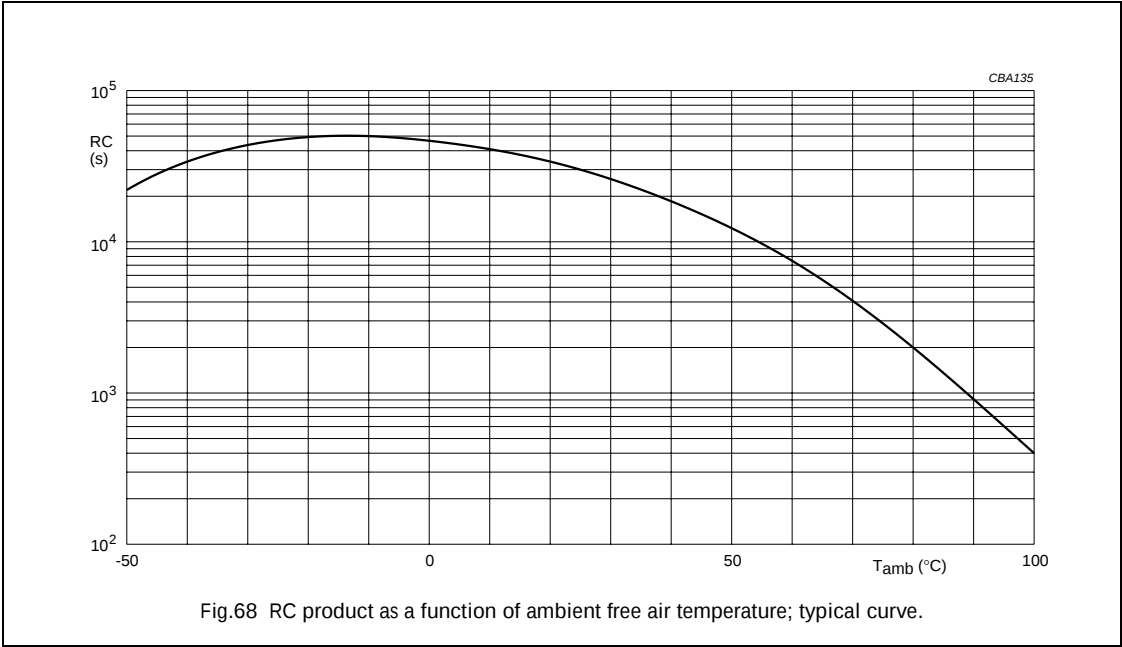

Metallized polyester film capacitors

MKT 370/371/372/373

Maximum allowed component temperature rise (ΔT) as a function of the ambient temperature (T_{amb})

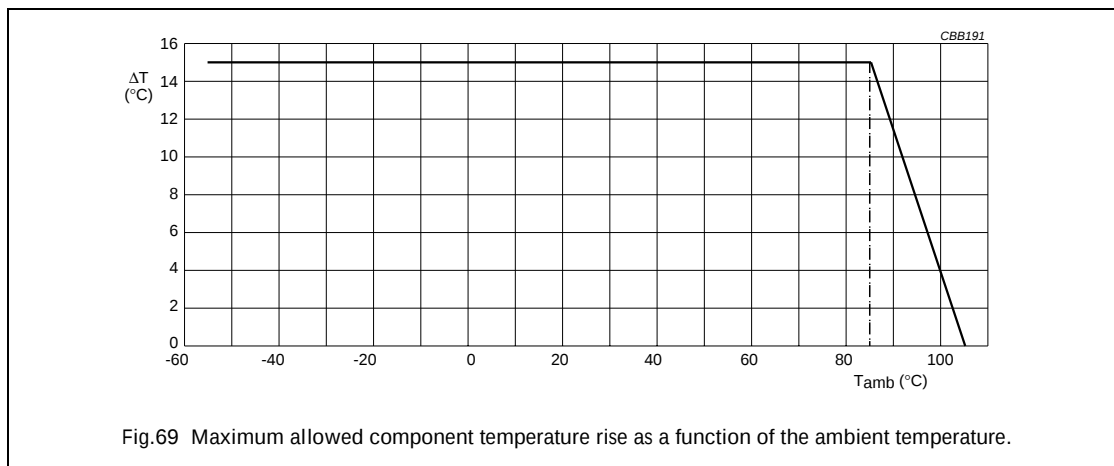


Fig.69 Maximum allowed component temperature rise as a function of the ambient temperature.

Heat conductivity (G) as a function of pitch and capacitor body thickness in $\text{mW}/^{\circ}\text{C}$

Table 1 Heat conductivity

b_{max} (mm)	PITCH (mm)					
	5	7.5	10	15	22.5	27.5
2.5	2.5	3	—	—	—	—
3.0	—	4	—	—	—	—
3.5	3.0	—	—	—	—	—
4.0	—	5	6.0	—	—	—
4.5	4.0	—	—	—	—	—
5.0	—	6	7.5	10	—	—
6.0	5.5	7	9.0	11	19	—
7.0	—	—	—	12	21	—
8.5	—	—	—	16	25	—
10.0	—	—	—	18	28	—
11.0	—	—	—	—	—	36
13.0	—	—	—	—	—	42
15.0	—	—	—	—	—	48
18.0	—	—	—	—	—	57

Power dissipation and maximum component temperature rise

The power dissipation must be limited in order not to exceed the maximum allowed component temperature rise as a function of the free air ambient temperature.

The power dissipation can be calculated according chapter "Introduction", section "Maximum power dissipation".

The component temperature rise (ΔT) can be measured (see section "Measuring the component temperature" for more details) or calculated by $\Delta T = P/G$:


- ΔT = component temperature rise ($^{\circ}\text{C}$).
- P = power dissipation of the component (mW).
- G = heat conductivity of the component ($\text{mW}/^{\circ}\text{C}$).

Metallized polyester film capacitors

MKT 370/371/372/373

Measuring the component temperature

A thermocouple must be attached to the capacitor body as in Fig.70.

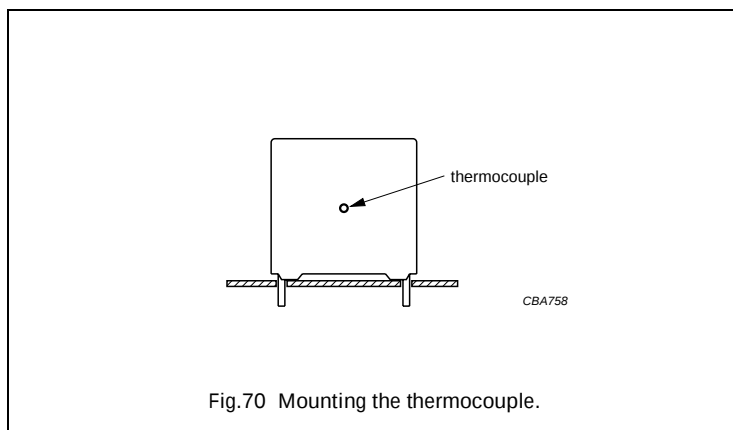

The temperature is measured in unloaded (T_{amb}) and maximum loaded condition (T_c).

The temperature rise is given by $\Delta T = T_c - T_{amb}$.

To avoid radiation or convection, the capacitor should be tested in a wind-free box.

Metallized polyester film capacitors

MKT 370/371/372/373

Application note and limiting conditions

These capacitors are not suitable for mains applications as across-the-line capacitors without additional protection, as described hereunder. These mains applications are strictly regulated in safety standards and therefore electromagnetic interference suppression capacitors conforming the standards must be used.

To select the capacitor for a certain application, the following conditions must be checked:

1. The peak voltage (U_p) shall not be greater than the rated DC voltage (U_{Rdc}).
2. The peak-to-peak voltage (U_{p-p}) shall not be greater than the maximum U_{p-p} to avoid the ionisation inception level.
3. The voltage pulse slope (dU/dt) shall not exceed the rated voltage pulse slope in an RC-circuit at rated voltage and without ringing. If the pulse voltage is lower than the rated DC voltage, the rated voltage pulse slope may be multiplied by U_{Rdc} and divided by the applied voltage.

For all other pulses following equation must be fulfilled:

$$2 \times \int_0^T \left(\frac{dU}{dt} \right)^2 \times dt < U_{Rdc} \times \left(\frac{dU}{dt} \right)_{rated}$$

T is the pulse duration.

4. The maximum component surface temperature rise must be lower than the limits in Fig.69.
5. Since in circuits used at voltages over 280 V peak-to-peak the risk for an intrinsically active flammability after a capacitor breakdown (short circuit) increases, it is recommended that the power to the component is limited to 100 times the values mentioned in Table 1 "Heat conductivity".
6. When using these capacitors as across-the-line capacitor in the input filter for mains applications or as series connected with an impedance to the mains the applicant must guarantee that following conditions are fulfilled in any case (spikes and surge voltages from the mains included).

VOLTAGE CONDITIONS FOR 6 ABOVE

ALLOWED VOLTAGES	$T_{amb} \leq 85\text{ °C}$	$85\text{ °C} < T_{amb} \leq 105\text{ °C}$
Maximum continuous RMS voltage	U_{Rac}	$0.8 \times U_{Rac}$
Maximum temporary RMS -overvoltage (<24 hours)	$1.25 \times U_{Rac}$	$1.0 \times U_{Rac}$
Maximum peak voltage (V_{o-p}) (<2 s)	$1.6 \times U_{Rdc}$	$1.3 \times U_{Rdc}$

Metallized polyester film capacitors

MKT 370/371/372/373

Example

$C = 3300 \text{ nF}$ - 100 V used for the voltage signal shown in Fig.71.

$U_{p-p} = 80 \text{ V}$; $U_p = 70 \text{ V}$; $T_1 = 0.5 \text{ ms}$; $T_2 = 1 \text{ ms}$.

The ambient temperature is 35 °C.

Checking the conditions:

1. The peak voltage $U_p = 70 \text{ V}$ is lower than 100 V (DC).
2. The peak-to-peak voltage 80 V is lower than $2 \times \sqrt{2} \times 63 \text{ V(AC)} = 178 U_{p-p}$.
3. The voltage pulse slope $dU/dt = 80 \text{ V}/500 \mu\text{s} = 0.16 \text{ V}/\mu\text{s}$.
This is lower than 8 V/ μs (see specific reference data for each version).
4. The dissipated power is 60 mW as calculated with Fourier terms.
The temperature rise for $b_{\max} = 7.0 \text{ mm}$ and pitch = 15 mm will be $\frac{60 \text{ mW}}{12 \text{ mW}/^\circ\text{C}} = 5 ^\circ\text{C}$.
This is lower than 15 °C temperature rise at 35 °C; see Fig.69.
5. Not applicable.
6. Not applicable.

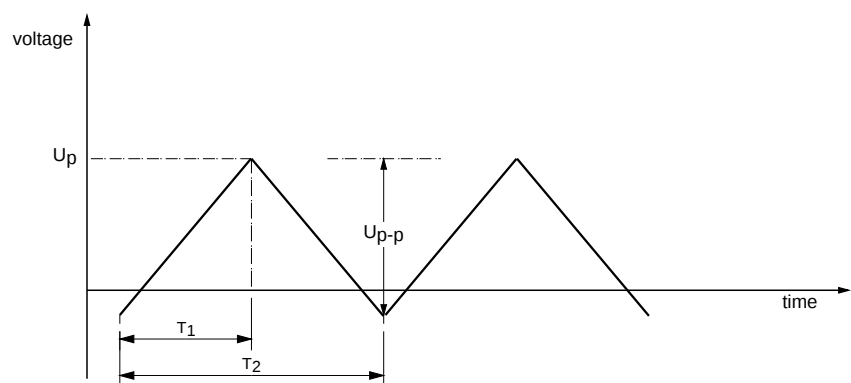


Fig.71 Voltage signal.

Metallized polyester film capacitors

MKT 370/371/372/373

MARKING

Product marking

CAPACITORS WITH PITCH = 5.08 mm: STYLE 2222 370

The capacitors are marked on the side (see Fig.72) with the following information:

1. Capacitance code in accordance with "IEC 60062"
2. Tolerance on rated capacitance: $K = \pm 10\%$; $J = \pm 5\%$
3. Rated voltage (DC) (e.g. 63 V)
4. Code for manufacturer
5. Year and week of manufacture (e.g. 0001)
6. Manufacturer's type designation (e.g. 370).

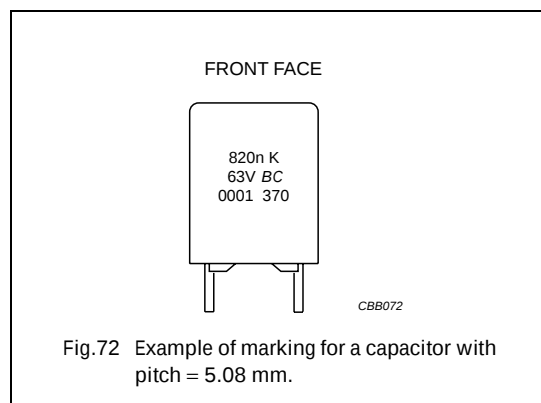


Fig.72 Example of marking for a capacitor with pitch = 5.08 mm.

CAPACITORS WITH PITCH = 7.62 mm: STYLE 2222 371

The capacitors are marked on the side (see Fig.73) with the following information:

1. Capacitance code in accordance with "IEC 60062"
2. Tolerance on rated capacitance: $K = \pm 10\%$; $J = \pm 5\%$
3. Rated voltage (DC) (e.g. 100 V)
4. Code for manufacturer
5. Year and week of manufacture (e.g. 0001)
6. Manufacturer's type designation (e.g. 371).

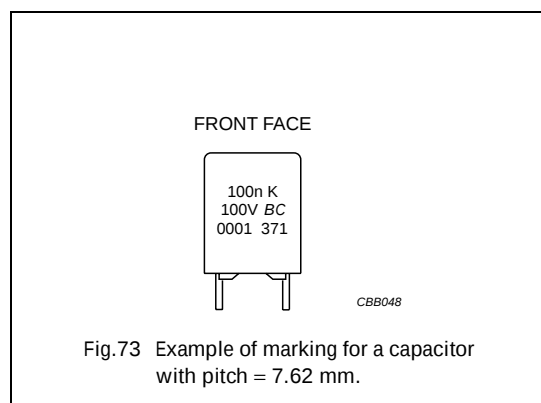


Fig.73 Example of marking for a capacitor with pitch = 7.62 mm.

CAPACITORS WITH PITCH = 10 mm: STYLE 2222 372

The capacitors are marked on the side (see Fig.74) with the following information:

1. Year and week of manufacture (e.g. 0001)
2. Capacitance code in accordance with "IEC 60062"
3. Tolerance on rated capacitance: $K = \pm 10\%$; $J = \pm 5\%$;
4. Rated voltage (DC) (e.g. 100 V)
5. Code for dielectric material (MKT)
6. Manufacturer's type designation (e.g. 372)
7. Code for manufacturer.
8. Code for factory of origin (HQ)

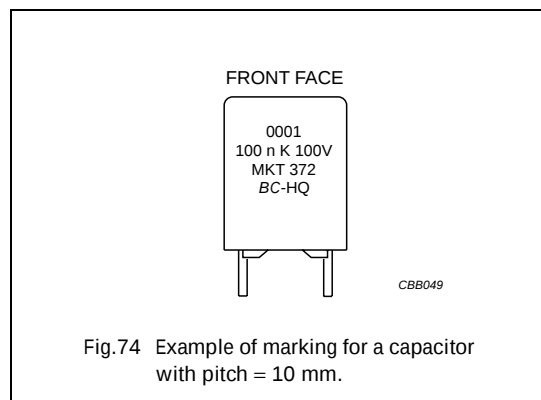


Fig.74 Example of marking for a capacitor with pitch = 10 mm.

Metallized polyester film capacitors

MKT 370/371/372/373

CAPACITORS WITH PITCH = 15 mm: STYLES 2222 373

The capacitors are marked on the top (see Fig.75) with the following information:

1. Rated capacitance code in accordance with "IEC 60062"
2. Tolerance on rated capacitance: K = $\pm 10\%$; J = $\pm 5\%$
3. Rated voltage (DC) (e.g. 100 V)
4. Manufacturer's type designation (373)
5. Code for dielectric material (MKT);

and on the side with the following information:

1. Manufacturer
2. Code for factory of origin (HQ)
3. Year and week of manufacture (e.g. 0001).

CAPACITORS WITH PITCH = 22.5 AND 27.5 mm: STYLES 2222 373

The capacitors are marked on the top (see Fig.76) with the following information:

1. Rated capacitance code in accordance with "IEC 60062"
2. Tolerance on rated capacitance: K = $\pm 10\%$; J = $\pm 5\%$
3. Rated voltage (DC) (e.g. 100 V)
4. Manufacturer
5. Manufacturer's type designation (373)
6. Code for dielectric material (MKT)
7. Code for factory of origin (HQ)
8. Year and week of manufacture (e.g. 0001).

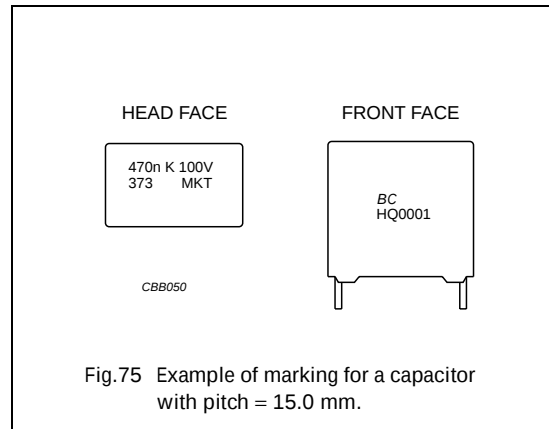


Fig.75 Example of marking for a capacitor with pitch = 15.0 mm.

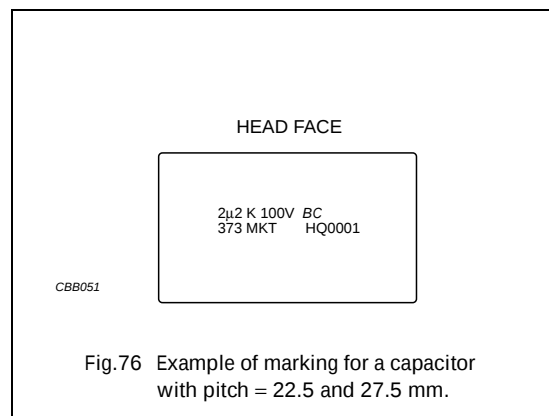



Fig.76 Example of marking for a capacitor with pitch = 22.5 and 27.5 mm.

Metallized polyester film capacitors

MKT 370/371/372/373

Package marking

The package containing the capacitors is marked as shown in Fig.77.

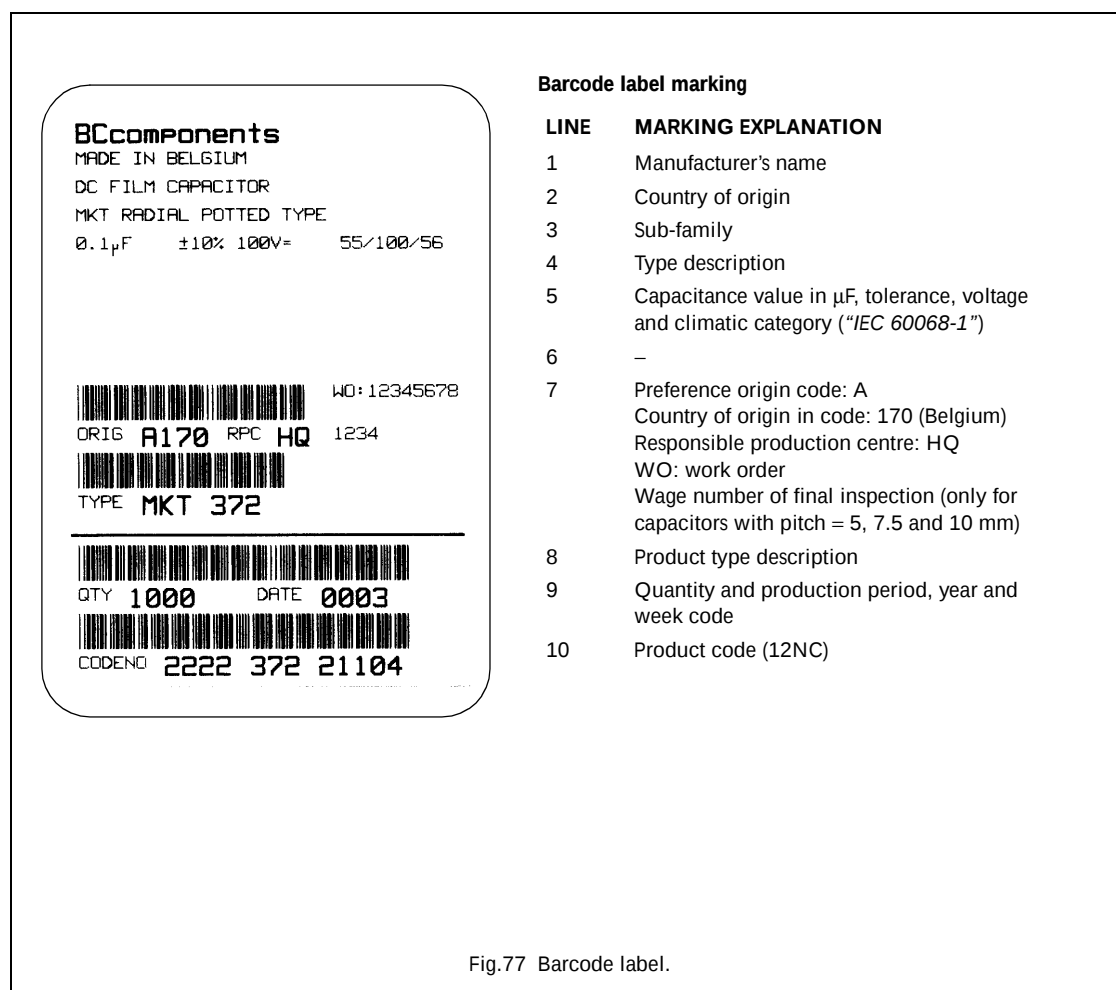

Metallized polyester film capacitors

MKT 370/371/372/373

QUICK REFERENCE TEST REQUIREMENTS

TEST	PROCEDURE (quick reference)	REQUIREMENTS
Robustness of leads		
Tensile strength: “IEC 60068-2-21”	load 10 N; 10 s	no visible damage legible marking $ \Delta C/C \leq 2\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1
Bending: “IEC 60068-2-21”	load 5 N; $4 \times 90^\circ$	
Resistance to soldering heat: “IEC 60068-2-20”	solder bath: 260 °C; 10 s	
Component solvent resistance	isopropyl alcohol; 23 °C; 5 minutes	
Robustness of component		
Vibration: “IEC 60068-2-6”	10 to 55 Hz; amplitude 0.75 mm or acceleration 98 m/s ² ; 6 hours	$ \Delta C/C \leq 3\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1
Shock: “IEC 60068-2-27”	half sinewave; 490 m/s ² ; 11 ms	
Climatic sequence		
Dry heat: “IEC 60068-2-2”	16 hours; 105 °C	$\Delta C/C \leq 3\%$ $\Delta \tan \delta \leq 50 \times 10^{-4}$; note 1 $R_{ins} \geq 50\%$ of specified value
Damp heat cyclic, test Db, first cycle: “IEC 60068-2-30”		
Cold: “IEC 60068-2-1”	2 hours; −55 °C	
Damp heat, test Db, remaining cycles: “IEC 60068-2-30”		
Other applicable tests		
Damp heat, steady state: “IEC 60068-2-3”	56 days; 40 °C; 90 to 95% RH	$ \Delta C/C \leq 5\%$ $\Delta \tan \delta \leq 50 \times 10^{-4}$; note 1 $R_{ins} \geq 50\%$ of specified value
Endurance (DC): “IEC 60384-2”	2000 hours; $1.25 \times U_{Rdc}$; 85 °C $1 \times U_{Rdc}$; 105 °C	$\Delta C/C \leq 5\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1 $R_{ins} \geq 50\%$ of specified value
Heat storage: “IEC 60384-2”	2000 hours; 105 °C	$ \Delta C/C \leq 3\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1
Endurance (AC): “IEC 60384-2”	1000 hours: $1.1 \times U_{Rac}$; 85 °C	$ \Delta C/C \leq 8\%$ (style 370) $ \Delta C/C \leq 5\%$ (style 371) $ \Delta C/C \leq 3\%$ (style 372 and 373) $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1

Metallized polyester film capacitors**MKT 370/371/372/373**

TEST	PROCEDURE (quick reference)	REQUIREMENTS
Resistance to detergents	3 minutes in dishwater at 70 °C	$ \Delta C/C \leq 1\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1 $R_{\text{ins}} \geq 50\%$ of specified value
Resistance to soldering heat with preheating: "IEC 60384-2"	body temperature: 100 °C; bath temperature: 260 °C; dwell time: 5 s	$ \Delta C/C \leq 2\%$ $\Delta \tan \delta \leq 30 \times 10^{-4}$; note 1
Passive flammability "IEC 60384-1"	Class C	no burning

Note

1. Measuring frequency 10 kHz.