



Microsemi Corp.
The diode experts

1N5728 thru 1N5757

SCOTTSDALE, AZ

For more information call:
(602) 941-6300

FEATURES

- ZENER VOLTAGE 4.7 TO 75 V
- SMALL RUGGED DOUBLE SLUG CONSTRUCTION DO-35
- CONSTRUCTED WITH AN OXIDE PASSIVATED ALL DIFFUSED DIE

MAXIMUM RATINGS

Operating Temperature: -65°C to $+200^{\circ}\text{C}$

DC Power Dissipation: 400 mW

Power Derating: 2.63 mW/ $^{\circ}\text{C}$ above 50°C

Forward Voltage @ 10 mA: 0.9 Volts

**SILICON
400 mW
ZENER DIODES**

*ELECTRICAL CHARACTERISTICS @ 25°C

TYPE NUMBER (Note 1)	REGULATOR VOLTAGE	TEST CURRENT	DYNAMIC IMPEDANCE	REVERSE CURRENT	I _v TEST VOLTAGE	MAXIMUM REGULATOR CURRENT	TEMPERATURE COEFFICIENT
	(V _r) VOLTS	(I _t) MODE	(Z _d) OHMS	(I _r) μA	(V _v) VOLTS	(I _{zm}) mA	(α_{vz}) mV/ $^{\circ}\text{C}$
1N5728B	4.7	10	70	3.0	2	70	-1.0
1N5729B	5.1	10	50	3.0	2	65	-0.2
1N5730B	5.6	10	25	3.0	2	60	+1.2
1N5731B	6.2	10	10	3.0	4	55	+2.3
1N5732B	6.8	10	10	3.0	4	50	+3.0
1N5733B	7.5	10	10	2.0	5	45	+4.0
1N5734B	8.2	10	15	1.0	5	40	+5.0
1N5735B	9.1	10	15	0.5	6	40	+6.0
1N5736B	10	10	20	0.2	7	35	+7.0
1N5737B	11	5	20	0.1	8	30	+8.0
1N5738B	12	5	25	0.1	8	30	+9.0
1N5739B	13	5	30	0.1	9	25	+10.5
1N5740B	15	5	30	0.1	10	25	+12.9
1N5741B	16	5	40	0.1	11	20	+13
1N5742B	18	5	45	0.1	12	20	+15
1N5743B	20	5	55	0.1	14	15	+17
1N5744B	22	5	55	0.1	15	15	+19
1N5745B	24	5	70	0.1	17	15	+21
1N5746B	27	2	80	0.1	19	10	+23.5
1N5747B	30	2	80	0.1	21	10	+26
1N5748B	33	2	90	0.1	23	10	+29
1N5749B	36	2	90	0.1	25	10	+31
1N5750B	39	2	130	0.1	27	9	+34
1N5751B	43	2	150	0.1	30	9	+37
1N5752B	47	2	170	0.1	33	8	+40
1N5753B	51	2	180	0.1	36	7	+44
1N5754B	56	2	200	0.1	39	6	+47
1N5755B	62	2	215	0.1	43	6	+51
1N5756B	68	2	240	0.1	48	5	+56
1N5757B	75	2	255	0.1	53	5	+60

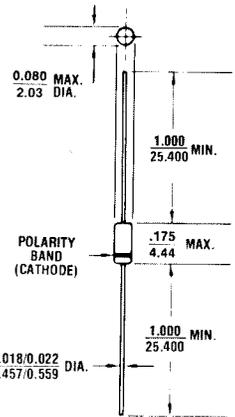


FIGURE 1

All dimensions in INCH
m.m.

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case. DO-35.

FINISH: All external surfaces are corrosion resistant and leads solderable.

THERMAL RESISTANCE: $200^{\circ}\text{C}/\text{W}$ (Typical) junction to lead at 0.375-inches from body.

POLARITY: Diode to be operated with the banded end positive with respect to the opposite end.

WEIGHT: 0.2 grams.

MOUNTING POSITION: Any.

*JEDEC Registered Data. The Type Number indicates 5% Tolerance. See Note 1.

1N5728 thru 1N5757

[查询"1N5728"供应商](#)

NOTE 1 Diodes listed have a $\pm 5\%$ voltage tolerance on nominal V_Z . Suffix C denotes a $\pm 2\%$ tolerance and suffix D denotes a $\pm 1\%$ tolerance.

NOTE 2 All static parameters measured under pulsed conditions, $t_p = 300 \mu\text{sec}$.

NOTE 3 Dynamic Impedance measured by superimposing 0.2 mA I_{ac} rms at 1000 hz on I_{DC} .

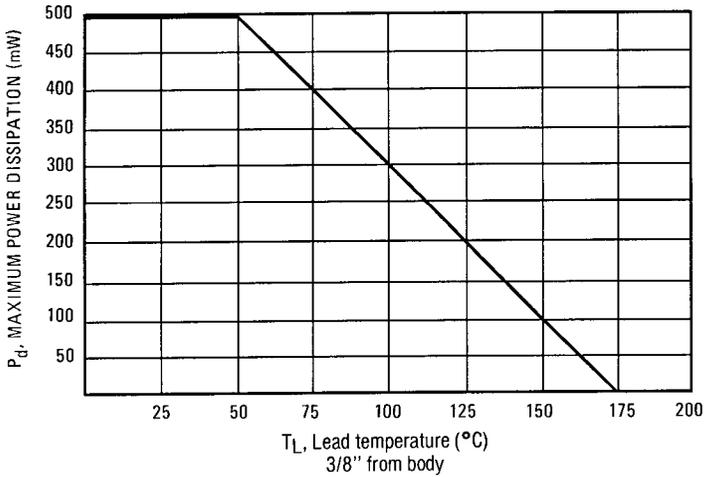


FIGURE 2 POWER DERATING CURVE