


NP 30/4.93 [查询"261-10/841-000"供应商](#)



A reliable contact – everytime!

**Modular terminal blocks and terminal block strips
with push-buttons and
cage-clamp* spring for solid, stranded and flexible conductors
Series 261**

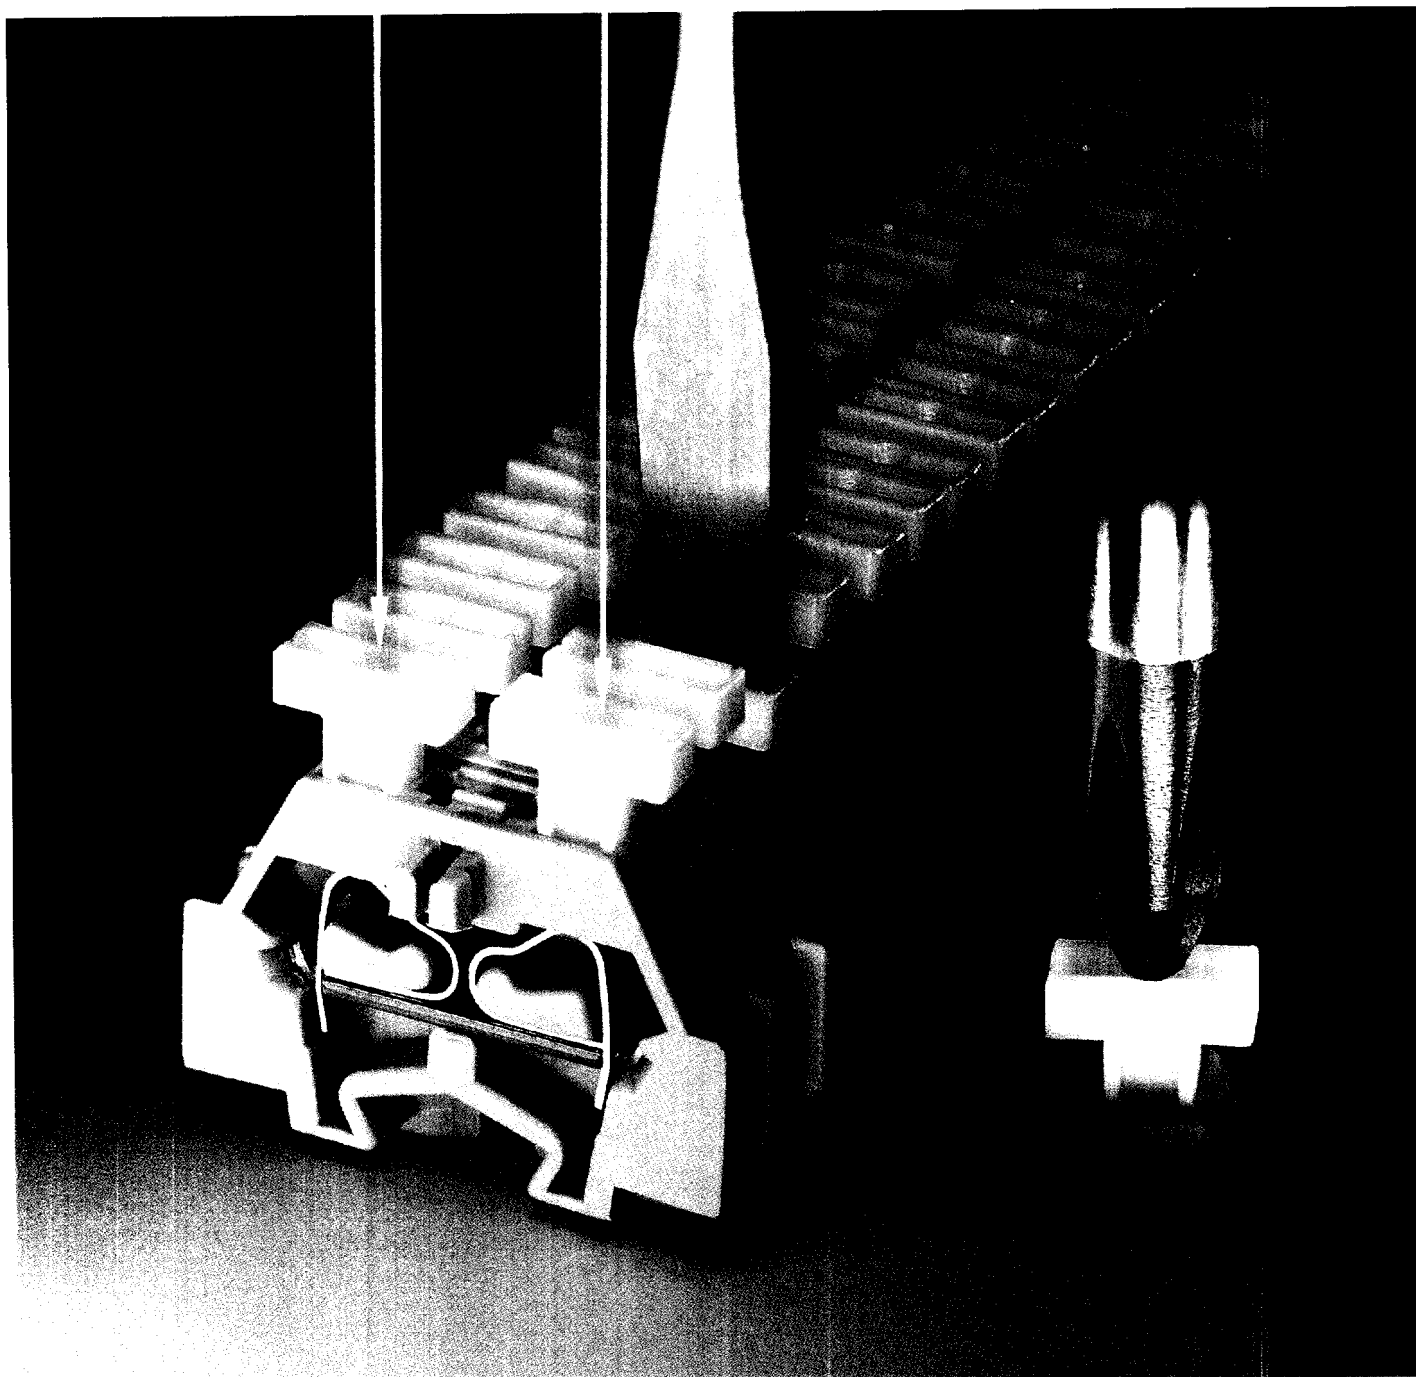


* a technical innovation from WAGO

WAGO Side-entry



- ① 630 V / 500 V = rated voltage
6 kV = rated surge voltage
2 / 3 = contamination level
- Suitable for EEx i-applications

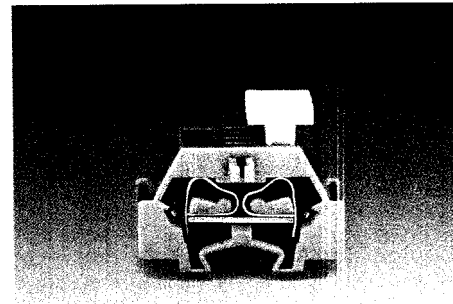


Accessories for modular terminal blocks and terminal block strips (Marking accessories see catalogue ZK 1, page 29)

* For approvals with the corresponding nominal data please see catalogue ZK 1, pages 34 – 35.

Terminal block strips, with push-buttons at one side, with fixing flanges or snap-in mounting feet, series 261



查询"261-112/341-000"供应商
WAGO Side-entry



AWG 26 – 14 300 V, 15 A 300 V, 20 A pole width 0.236 in (6 mm) Stripped length 0.35 in (8 – 9 mm)	0.08 – 2.5 mm² 630 V / 6 kV / 2 500 V / 6 kV / 3 26 A	2xAWG 26 – 14 300 V, 15 A 300 V, 20 A Pole width 0.394 in (10 mm) Stripped length 0.35 in (8 – 9 mm)	0.08 – 2.5 mm² 630 V / 6 kV / 2 500 V / 6 kV / 3 26 A
--	---	---	---

- ① 630 V / 500 V = rated voltage
6 kV = rated surge voltage
2/3 = contamination level

- ② For higher numbers of poles and/or terminal block strips with mixed colours acc. to customer's specification, please see catalogue ZK 1, page 30
- Suitable for EEx i-applications with blue insulating housings

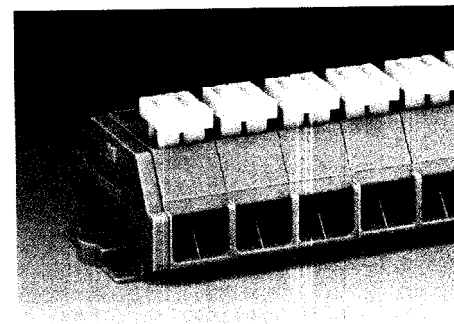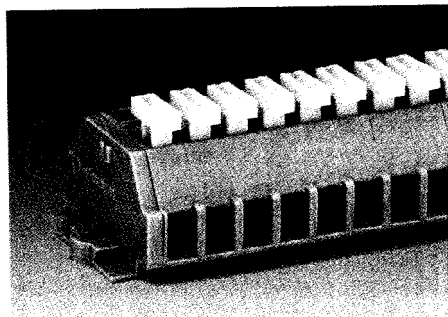

Description	No. of poles	Item-No.	Pack.-unit pcs.	No. of poles	Item-No.	Pack.-unit pcs.
 Terminal block strips with fixing flanges, for screw- or similar methods of fixing, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also on rail TS 35)	2-cond. term. bl. strips with fixing flanges, with push-buttons at one side, grey			4-cond. term. bl. strips with fixing flanges, with push-buttons at one side, grey		
	2	261-102/331-000	100	2	261-202/332-000	100
	3	261-103/331-000	100	3	261-203/332-000	100
	4	261-104/331-000	100	4	261-204/332-000	100
	5	261-105/331-000	100	5	261-205/332-000	100
	6	261-106/331-000	50	6	261-206/332-000	50
	7	261-107/331-000	50	7	261-207/332-000	50
	8	261-108/331-000	50	8	261-208/332-000	50
	9	261-109/331-000	50	9	261-209/332-000	50
	10	261-110/331-000	25	10	261-210/332-000	25
	11	261-111/331-000	25	11	261-211/332-000	25
	12 ②	261-112/331-000	25	12 ②	261-212/332-000	25
 Terminal block strips with snap-in mounting feet, for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (also on aluminium rail 210-154 or with mounting adapter 209-120 on rail TS 35)	2-cond. term. bl. strips with snap-in mounting feet, with push-buttons at one side, grey			4-cond. term. bl. strips with snap-in mounting feet, with push-buttons at one side, grey		
	2	261-152/331-000	100	2	261-252/332-000	100
	3	261-153/331-000	100	3	261-253/332-000	100
	4	261-154/331-000	100	4	261-254/332-000	100
	5	261-155/331-000	100	5	261-255/332-000	100
	6	261-156/331-000	50	6	261-256/332-000	50
	7	261-157/331-000	50	7	261-257/332-000	50
	8	261-158/331-000	50	8	261-258/332-000	50
	9	261-159/331-000	50	9	261-259/332-000	50
	10	261-160/331-000	25	10	261-260/332-000	25
	11	261-161/331-000	25	11	261-261/332-000	25
	12 ②	261-162/331-000	25	12 ②	261-262/332-000	25



Dimensions for modular terminal blocks and terminal block strips (in mm)

Modular terminal blocks and terminal block strips with fixing flanges

$$L = \text{No. of poles} \times \text{pitch}$$

$$L_1 = L + 8.1 \text{ mm}$$



$$L_2 = L + 14.5 \text{ mm}$$

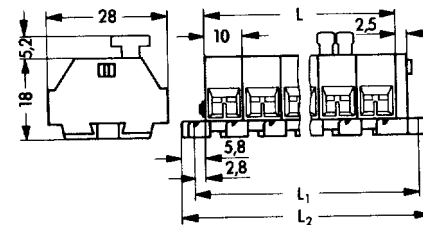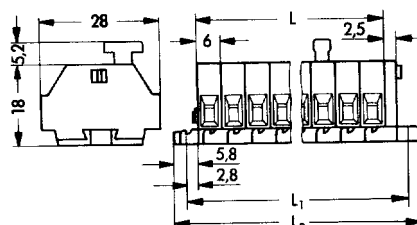

Modular terminal blocks and terminal block strips with snap-in mounting feet


- ③ End terminal block; see page 4 and example of an assembly in catalogue ZK 1 on page 31

$$L = (\text{No. of poles} \times \text{pitch}) + 4.4 \text{ mm}$$

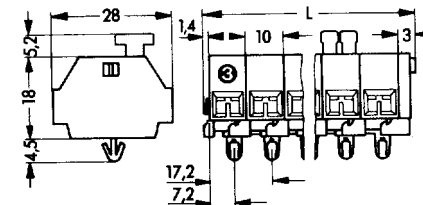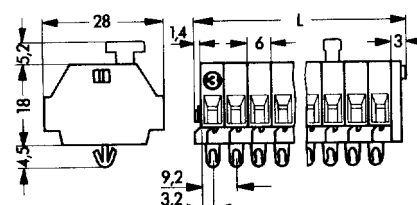

Modular terminal blocks, with push-buttons at both sides, with fixing flange or snap-in mounting foot, series 261

查询"261-112/341-000"供应商
WAGO Side-entry



AWG 26 - 14
300 V, 15 A
300 V, 20 A
Terminal block width 0.236 in (6 mm)
Stripped length 0.35 in (8 - 9 mm)



*


2xAWG 26 - 14
300 V, 15 A
300 V, 20 A
Terminal block width 0.394 in (10 mm)
Stripped length 0.35 in (8 - 9 mm)

*

- ① 630 V / 500 V = rated voltage
6 kV = rated surge voltage
2/3 = contamination level

☉ Suitable for EEx i-applications

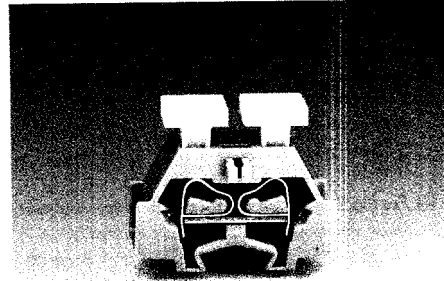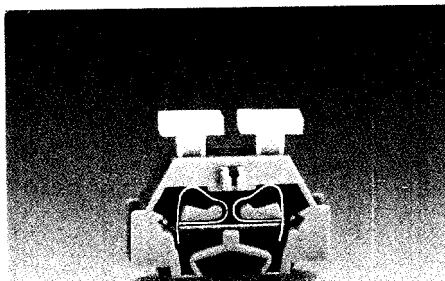

Description	Colour	Item-No.	Pack.-unit pcs.	Colour	Item-No.	Pack.-unit pcs.
	2-cond. term. bl. with push-buttons at both sides			4-cond. term. bl. with push-buttons at both sides		
	grey	261-301/341-000	200 (4 x 50)	grey	261-331/342-000	200 (4 x 50)
	light grey	261-303/341-000	200 (4 x 50)	light grey	261-333/342-000	200 (4 x 50)
	blue	261-304/341-000	200 (4 x 50)	blue	261-334/342-000	200 (4 x 50)
	orange	261-306/341-000	200 (4 x 50)	orange	261-336/342-000	200 (4 x 50)
	green-yellow	261-307/341-000	200 (4 x 50)	green-yellow	261-337/342-000	200 (4 x 50)
	2-cond. term. bl. with push-buttons at both sides			4-cond. term. bl. with push-buttons at both sides		
	grey	261-311/341-000	200 (4 x 50)	grey	261-341/342-000	200 (4 x 50)
	light grey	261-313/341-000	200 (4 x 50)	light grey	261-343/342-000	200 (4 x 50)
	blue	261-314/341-000	200 (4 x 50)	blue	261-344/342-000	200 (4 x 50)
	orange	261-316/341-000	200 (4 x 50)	orange	261-346/342-000	200 (4 x 50)
	green-yellow	261-317/341-000	200 (4 x 50)	green-yellow	261-347/342-000	200 (4 x 50)
	2-cond. term. bl. with push-buttons at both sides			4-cond. term. bl. with push-buttons at both sides		
	grey	261-321/341-000	200 (4 x 50)	grey	261-351/342-000	200 (4 x 50)
	light grey	261-323/341-000	200 (4 x 50)	light grey	261-353/342-000	200 (4 x 50)
	blue	261-324/341-000	200 (4 x 50)	blue	261-354/342-000	200 (4 x 50)
	orange	261-326/341-000	200 (4 x 50)	orange	261-356/342-000	200 (4 x 50)
	green-yellow	261-327/341-000	200 (4 x 50)	green-yellow	261-357/342-000	200 (4 x 50)
Terminal blocks with fixing flange , for screw- or similar methods of fixing, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also on rail TS 35)						
Terminal blocks with snap-in mounting foot , for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm, (also on aluminium rail 210-154 or with mounting adapter 209-120 on rail TS 35)						
End terminal block, ☉ without fixing foot, for terminal block strips with snap-in mounting feet (see dimensioned drawings on page 7 and example of an assembly in catalogue ZK 1 on page 31)						


Accessories for modular terminal blocks and terminal block strips (Marking accessories see catalogue ZK 1, page 29)

	End plate with fixing flange grey	261-361	100 (2 x 50)	261-361	100 (2 x 50)
	End plate with snap-in mounting foot grey	261-371	100 (2 x 50)	261-371	100 (2 x 50)
	Comb-type jumper bar , insulated, 2-pole, I _N = 15 A grey	261-402	25	261-402	25
		Drop one wire size under jumper when using metric size wire, not necessary with AWG size wire.		Drop one wire size under jumper when using metric size wire, not necessary with AWG size wire.	
	Operating tool , insulated, for connecting the comb-type jumper bar	209-132	1	209-132	1
	Aluminium carrier rail , 3"3' 0.71 in x 0.276 in 1000 x 18 x 7 mm	210-154	1	210-154	1
	Plastic end stop , with WSB marking facility, for aluminium rail 210-154 grey	209-122	25	209-122	25
	Mounting adapter , for terminal blocks with snap-in mounting foot, for TS 35	209-120	25	209-120	25
	Mounting adapter with screw , for terminal blocks with fixing flange, for TS 35	209-123	25	209-123	25
	Mounting adapter for TS 35 , can be used as end stop for series 260 to 262 grey	209-137	25	209-137	25

* For approvals with the corresponding nominal data please see catalogue ZK 1, pages 34 - 35.

Terminal block strips, with push-buttons at both sides, with fixing flanges or snap-in mounting feet, series 261



查询"261-112/341-000"供应商
WAGO Side-entry



AWG 26 - 14 300 V, 15 A 300 V, 20 A Pole width 0.236 in (6 mm) Stripped length 0.35 in (8 - 9 mm)	0.08 - 2.5 mm² 630 V / 6 kV / 2 500 V / 6 kV / 3 26 A	2xAWG 26 - 14 300 V, 15 A 300 V, 20 A Pole width 0.394 in (10 mm) Stripped length 0.35 in (8 - 9 mm)	0.08 - 2.5 mm² 630 V / 6 kV / 2 500 V / 6 kV / 3 26 A
--	---	---	---

- ① 630 V / 500 V = rated voltage
6 kV = rated surge voltage
2 / 3 = contamination level

- ② For higher numbers of poles and/or terminal block strips with mixed colours acc. to customer's specification, please see catalogue ZK 1, page 30
Suitable for EEx i-applications with blue insulating housings

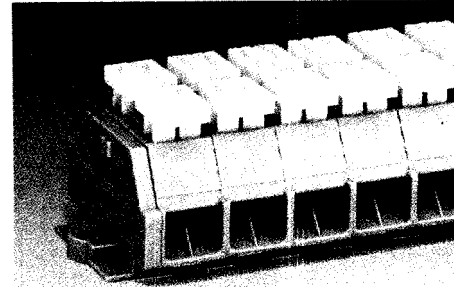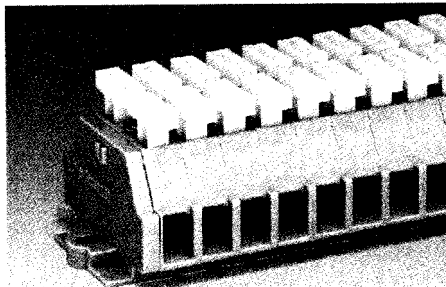

Description	No. of poles	Item-No.	Pack.-unit pcs.	No. of poles	Item-No.	Pack.-unit pcs.
 Terminal block strips with fixing flanges, for screw- or similar methods of fixing, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also on rail TS 35)	2-cond. term. bl. strips with fixing flanges, with push-buttons at both sides, grey			4-cond. term. bl. strips with fixing flanges, with push-buttons at both sides, grey		
	2	261-102/341-000	100	2	261-202/342-000	100
	3	261-103/341-000	100	3	261-203/342-000	100
	4	261-104/341-000	100	4	261-204/342-000	100
	5	261-105/341-000	100	5	261-205/342-000	100
	6	261-106/341-000	50	6	261-206/342-000	50
	7	261-107/341-000	50	7	261-207/342-000	50
	8	261-108/341-000	50	8	261-208/342-000	50
	9	261-109/341-000	50	9	261-209/342-000	50
	10	261-110/341-000	25	10	261-210/342-000	25
	11	261-111/341-000	25	11	261-211/342-000	25
	12 ②	261-112/341-000	25	12 ②	261-212/342-000	25
 Terminal block strips with snap-in mounting feet, for plate thickness 0.6 - 1.2 mm, fixing hole diameter 3.5 mm (also on aluminium rail 210-154 or with mounting adapter 209-120 on rail TS 35)	2-cond. term. bl. strips with snap-in mounting feet, with push-buttons at both sides, grey			4-cond. term. bl. strips with snap-in mounting feet, with push-buttons at both sides, grey		
	2	261-152/341-000	100	2	261-252/342-000	100
	3	261-153/341-000	100	3	261-253/342-000	100
	4	261-154/341-000	100	4	261-254/342-000	100
	5	261-155/341-000	100	5	261-255/342-000	100
	6	261-156/341-000	50	6	261-256/342-000	50
	7	261-157/341-000	50	7	261-257/342-000	50
	8	261-158/341-000	50	8	261-258/342-000	50
	9	261-159/341-000	50	9	261-259/342-000	50
	10	261-160/341-000	25	10	261-260/342-000	25
	11	261-161/341-000	25	11	261-261/342-000	25
	12 ②	261-162/341-000	25	12 ②	261-262/342-000	25



Dimensions for modular terminal blocks and terminal block strips (in mm)

Modular terminal blocks and terminal block strips with fixing flanges

$$L = \text{No. of poles} \times \text{pitch}$$

$$L_1 = L + 8.1 \text{ mm}$$

$$L_2 = L + 14.5 \text{ mm}$$

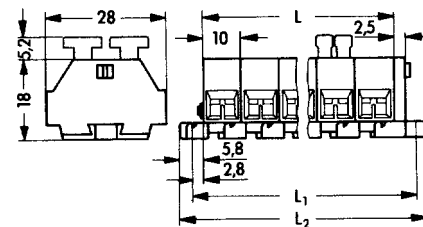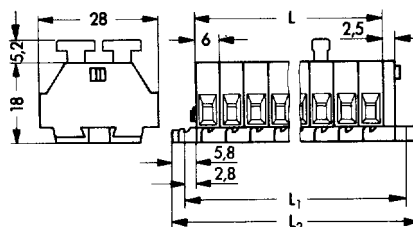

Modular terminal blocks and terminal block strips with snap-in mounting feet

- ③ End terminal block; see page 6 and example of an assembly in catalogue ZK 1 on page 31

$$L = (\text{No. of poles} \times \text{pitch}) + 4.4 \text{ mm}$$

