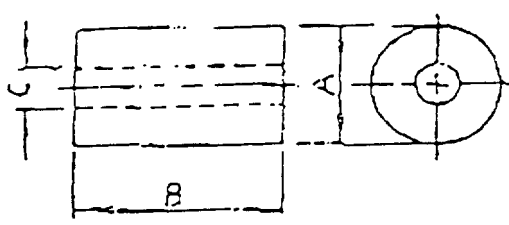


559-544

查询"33RH14.2X28.5X8"供应商 FOR PREPRODUCTION SAMPLES

CUSTOMER : FARNELL						DATE : MAY 17, 1995		
PART NO. : 33RH 14.2X28.5X8 (559-544)						DWG. NO. : RH-089		
MEAS ITEM		Z (OHK)	Z (OHK)	A m/m	B m/m	C m/a	D m/m	E m/a
SPEC	YOUR							
	SUGGEST	90 ⁻⁰	150 ⁻⁰	14.2±0.5	28.5 ±0.75	8±0.25		
TEST FREQ.		25 MHZ	100 MHZ					
1		128	219	14.20	28.30	8.01		
2		130	217	14.20	28.30	8.02		
3		131	206	14.20	28.30	8.00		
4		129	212	14.20	28.30	8.00		
5		130	208	14.20	28.30	8.05		
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
X̄		129.6	212.4	14.20	28.30	8.02		
R		3.0	13.0	0.0	0.0	0.04		
YOUR SAMPLE								
TEST CONDITION:						TEMP. 25 °C R.H. 65 %		APPROVED BY
								[Signature]
								CHECKED BY
								[Signature]
								DRAWN BY
								[Signature]

CUSTOMER : FARNELL				DATE : MAY 17, 1995			
PART NO. : 33RH 14.2X28.5X8 (559-544)				DWG. NO. : RH-089			
(1) MECHANICAL ASSEMBLY 				A	14.2±0.5	mm	
				B	28.5±0.75	mm	
				C	8.0±0.25	mm	
				D		mm	
				E		mm	
				F		mm	
				G		mm	
				H		mm	
				I		mm	
				1ST COLOR	2ND COLOR	3RD COLOR	4TH COLOR
(2) ELECTRICAL REQUIREMENTS				(3) SCHEMATIC			
TEST FREQUENCY	MHZ KHZ	L		OHM mH			
TEST FREQUENCY	MHZ KHZ	C		PF			
		U					
		SRF		KHZ			
		RDC		OHM			
		IDC		mA			
TEST FREQUENCY	25 KHZ	Z		90 ⁻⁰ OHM			
TEST FREQUENCY	100 KHZ	Z		150 ⁻⁰ OHM			
(4) TEST INSTRUMENTS HP 4191A RF IMPEDANCE ANALYZER.							
MAT'L	SPEC.			APPROVED BY			
CORE				[Signature]			
WIRE	0.8¢ T.C.W. X 220 m/m			CHECKED BY			
WINDING	1/2 TS.			[Signature]			
				DRAWN BY			
				[Signature]			