


140 Watts

ECM140 Series

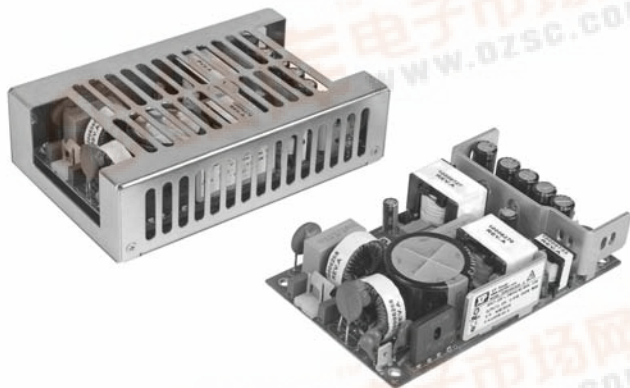

- High Efficiency Resonant Topology
- 120/148 W - Convection/Forced-cooled Ratings
- Class I & Class II Installations
- 12 V Fan Output as Standard
- Remote Sense as Standard
- 5V Standby Option
- Remote On/Off & Power OK Signals Option
- IT, Industrial & Medical Safety Approvals

Specification

Input

Input Voltage	• 80-264 VAC (120-370 VDC), derate output power <90 VAC (See derating curve)
Input Frequency	• 47-400 Hz (See note 1)
Input Current	• 2.5 A typical at 115 VAC, full load 1.3 A typical at 230 VAC, full load
Inrush Current	• 40 A max at 230 VAC, cold start (25 °C)
Power Factor	• EN61000-3-2, class A
Earth Leakage Current	• 265 μ A at 264 VAC/60 Hz max. 0.5/1.1 mA 115/230 VAC at 400 Hz typ.
Input Protection	• Internal T5.0 A/250 V fuse in line and neutral

Output

Output Voltage	• 12-48 VDC (see tables)
Output Voltage Trim	• $\pm 5\%$
Initial Set Accuracy	• $\pm 1\%$ V1, $\pm 5\%$ V2, $\pm 3\%$ V3
Minimum Load	• 0.1A required for V2 regulation when used.
Start Up Delay	• 1 s typical
Start Up Rise Time	• 50 ms
Hold Up Time	• 16 ms min at 115 VAC
Drift	• $\pm 0.2\%$ after 20 min warm up
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 1\%$ V1, $\pm 5\%$ V2 & V3 max
Over/Undershoot	• 5% typical
Transient Response	• 4% max. deviation, recovery to within 1% in 500 μ s for a 50-75-50% load change
Ripple & Noise	• 1% pk-pk V1, others 2%, 20 MHz bandwidth
Overvoltage Protection	• 115-140% Vnom, recycle input to reset
Overload Protection	• 110-150% V1 only
Short Circuit Protection	• Continuous trip and restart (Hiccup mode)
Temperature Coefficient	• 0.05%/°C
Remote Sense	• Compensates for 0.5 V total voltage drop
Remote On/Off (Inhibit/Enable Option -A)	• Uncommitted isolated optocoupler diode, powered diode inhibits V1 & V2

General

Efficiency	• 88% typical
Isolation	• 4000 VAC Input to Output, 1500 VAC Input to Ground, 500 VAC Output to Ground
Switching Frequency	• 70 kHz typical
Signals (Option -A)	• Power OK - open collector, Remote On/Off, 5 V Standby
MTBF	• 220 kHrs per MIL-HDBK-217F

Environmental

Operating Temperature	• 0 °C to +70 °C derate linearly from +50 °C at 2.5%/°C to 50% load at +70 °C when convection-cooled and from +60 °C at 2.5%/°C to 75% load at +70 °C when forced-cooled. See derating curve and longform datasheet for thermal considerations.
Cooling	• Convection & fan cooled ratings (see tables)
Operating Humidity	• 95% RH, non-condensing
Storage Temperature	• -40 °C to +85 °C
Operating Altitude	• 3000 m
Shock	• 30 g pk, half sine, 6 axis
Vibration	• 2 g rms, 5 Hz to 500 kHz, 3 axis

EMC & Safety

Low Voltage PSU EMC Emissions	• EN61204-3, high severity level as below • EN55022 level B conducted • EN55022 level A radiated
Harmonic Currents	• EN61000-3-2, class A
Voltage Flicker	• EN61000-3-3
Radiated Immunity	• EN61000-4-3, level 3 Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria A
Surge	• EN61000-4-5, installation class 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 3 Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B, EN60601-1-2, 30% 500 ms, 60% 100 ms, 100% 10 ms, 100% 5000 ms, Perf Criteria A, A, A, B - 230 VAC. Consult longform datasheet for 115 V operation.
Safety Approvals	• See Safety Approvals (see next page)
Equipment Protection Class	• Class I and Class II

Notes

1. Safety approvals cover frequency 47-63 Hz.

Models and Ratings - Convection-cooled

ECM140 **XP**

查询"ECM140US24"供应商

Output Power ⁽¹⁾	Output Voltage V1	Max Output Current V1	Fan Output V2	Standby Supply V3 (optional)	Model Number ^(2,3)
120 W	12.0 VDC	10.0 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US12
120 W	15.0 VDC	8.0 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US15
120 W	18.0 VDC	6.6 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US18
120 W	24.0 VDC	5.0 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US24
120 W	48.0 VDC	2.5 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US48

Notes

1. Convection-cooled, max output power must not exceed 120 W for combined V1, V2, & V3
 2. For V3 5 V standby, Power OK & Inhibit, add suffix '-A' to model number.

3. For covered versions, add suffix '-C' to model number or order part no. ECM140 COVER KIT for standalone cover. Not suitable for use in class II installations.

Models and Ratings - Forced-cooled


Output Power ⁽¹⁾	Output Voltage V1	Max Output Current V1	Fan Output V2	Standby Supply V3 (optional)	Model Number ⁽²⁾
148 W	12.0 VDC	11.7 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US12
148 W	15.0 VDC	9.3 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US15
148 W	18.0 VDC	7.7 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US18
148 W	24.0 VDC	5.8 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US24
148 W	48.0 VDC	2.9 A	12.0 V/0.5 A	5.0 V/0.5 A	ECM140US48

Notes

1. 10 CFM airflow.

2. For V3 5 V standby, Power OK & Inhibit, add suffix '-A' to model number.

Mechanical Details

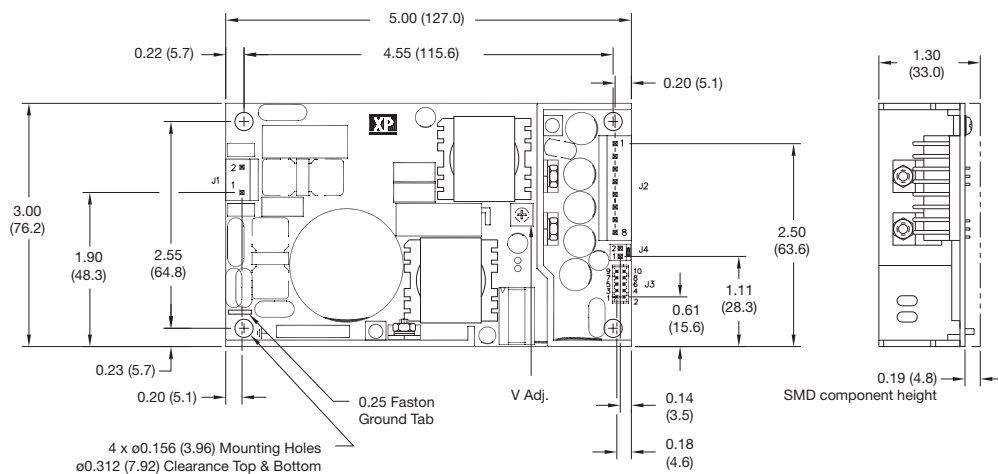

Signal Connector J3			
Pin	Single	Pin	Single
1	+5V Standby*	6	Inhibit LO*
2	Logic GND*	7	+Sense
3	Logic GND*	8	-Sense
4	Power OK*	9	+Vout
5	Inhibit HI*	10	-Vout

*Optional

J3 mates with JST housing PHDR-10VS and JST series SPHD-001T-P0.5 crimp terminals.

Input Connector J1

Pin	Line
Pin 1	Line
Pin 2	Neutral
.25" Faston	Earth

J1 mates with Molex housing 09-50-1031 and Molex series 5194 crimp terminals.

Output Connector J2

Pin	Single
1	+V1
2	+V1
3	+V1
4	+V1
5	RTN
6	RTN
7	RTN
8	RTN

J2 mates with Molex housing 09-50-1081 and Molex series 5194 crimp terminals.

Fan Connector J4



Pin	Line
Pin 1	Fan +(12V)
Pin 2	Fan -

J4 mates with Molex housing 22-01-1024 and Molex series 5103 crimp terminals.

Notes

1. All dimensions in inches (mm). Tolerance .xx = ± 0.02 (0.50); .xxx = ± 0.01 (0.25)
 2. Cover dimensions are 5.50 x 3.50 x 1.54 (140 x 89 x 39). See longform datasheet for drawing.

Derating Curves

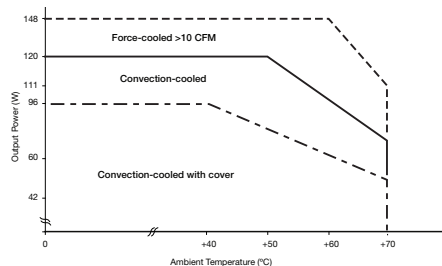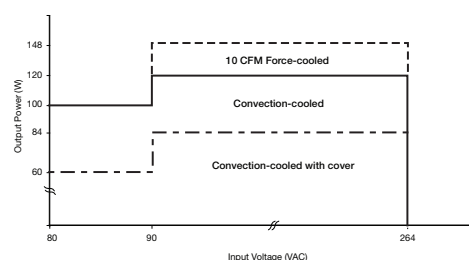

Safety Approvals

IEC60950-1 CB report, CSA 22.2
 No. 60950-1, UL60950-1, TUV
 EN60950-1

IEC60601-1 CB report, CSA 22.2
 No. 60601-1, UL60601-1, TUV
 60601-1,

TUV IEC61010-1



THE X P E R T S I N P O W E R

01-Jul-08