

Series 162, 163 & 165

Connector/Stud Power Distribution Blocks

SPECIFICATIONS

Rating: To 760A, 600V; UL/CSA. See table.


Materials: Molded material: Black, UL rated 94V0 thermoplastic

Operating Temperature: 150°C

Marking: Marker strip is optional, consult factory.

Agency Information: UL 221592; General Industrial Class per UL 1059; CSA LR053787; CE Certified

Covers: See page 137





Part Number	Line Connection	Load Connection	Connector Material & Ampacity	Agency Approvals	
Connector to Stud					
16280	2/0-#14CU/#8AL	1/4-20x1/2 Stud	AL-175A	UL	CSA
16281	2/0-#14CU/#8AL	1/4-20 Tapped hole	AL-175A	UL	CSA
16378	500MCM-#6CU-AL	1/4-20x1 Stud	AL-380A	UL	CSA
16383	500MCM-#6CU-AL	(1) 3/8-16x1 1/4 Stud	AL-380A	UL	CSA
16582	(2) 500MCM-#6CU-AL	(2) 3/8-16x1 5/8 Stud	AL-760A	UL	CSA
Stud to Stud					
16390	3/8-16x1 1/8 Stud	3/8-16x1 1/8 Stud	CU-250A	UL	CSA
16394	1/2-13x1 1/16 Stud	1/2-13x1 1/16 Stud	CU-400A	UL	CSA
16395	3/8-16x1 7/16 Stud	(2) 1/4-20x9/16 Stud	CU-310A	UL	CSA
16591	3/8-16x1 7/16 Stud	(2) 3/8-16x1 7/16 Stud	CU-400A	UL	-

⁽¹⁾ Openings per pole.

Series	A	B	C 1-pole	C 2-pole	C 3-pole
162	2.87	2.25	1.06	1.87	2.68
163	4.00	3.37	1.98	3.60	5.21
165	5.50	4.75	3.10	5.79	8.48

Series	D	E	F	G	H	J
162	1.75	.81	.53	.31	.84	.31
163	3.32	1.62	.97	.31	.87	.35
165	2.93	2.68	1.55	.37	1.19	.44

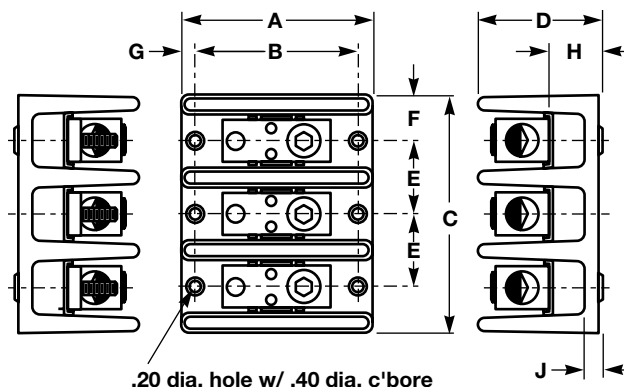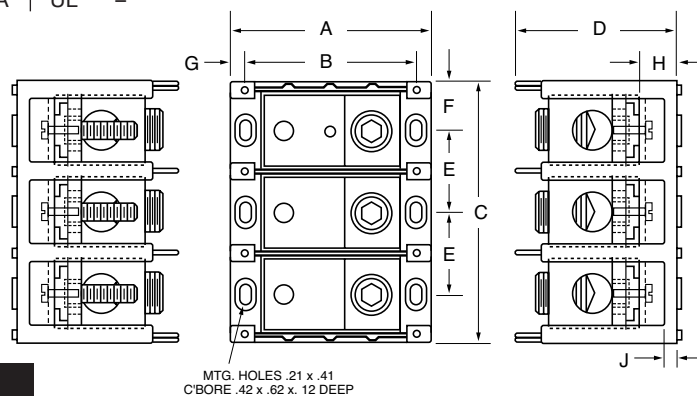

Covers (160, 162, 165 Series)

Part Numbering System

Series							
C	P	B				—	
160							1 - One Pole Block (162,165 Series only)
162							2 - Two Pole Block
165							3 - Three Pole Block
							4 - Four Pole Block (160 Series only)

Covers (163 Series)

Part Numbering System

Series					
C	P	D	B	-	
					1- One Pole Block
					2- Two Pole Block
					3- Three Pole Block

