


- 129-720 -

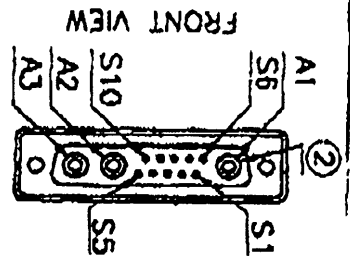

NOTES:

△ CABLE: UL 2919, 5 COAXIAL CABLES 75Ω + DRAIN WIRE.
5 COAXIAL CABLES: UL 1354, 28 AWG (7/0.127), TINNED AND STRANDED COPPER WIRE.

INSULATOR: FO-PE, OD=2.8±0.1mm.

SHIELD: SPIRAL, TIN PLATED OF COPPER WIRE.

JACKET: PVC, COLOR: RED, GREEN, BLUE, WHITE, BLACK.

SHIELD: FILLER PVC + AL-FOIL/MYLAR (OVERLAP MIN 25%).

JACKET: PVC, COLOR: BEIGE, OD=10.5±0.25mm.

② CONNECTOR:

(J1): 13W3 FEMALE SOLDER TYPE CONNECTOR.

INSULATOR: P.B.T. + GLASS FIBER, COLOR: BLACK.

CONTACT: COPPER ALLOY, GOLD FLASH.

13W3 COAXIAL PIN.

INSULATOR: P.B.T.

CONTACT: BRASS, GOLD FLASH.

(J2): HIGH DENSITY D-SUB 15 WAYS MALE CONNECTOR.

INSULATOR: P.B.T. + GLASS FIBER, COLOR: BLUE.

CONTACT: COPPER ALLOY, GOLD FLASH (THICKNESS: 0.000762 mm) OVER NICKEL PLATED.


SHELL: STEEL, TIN PLATED.

3. HOOD: PVC, MOLDED TYPE, COLOR: BEIGE, WITH AL-FOIL SHIELDED ON INNER MOLD BEFORE INJECTION OUTER MOLD AND WITH THUMB SCREW #4-40 UNC FOR 13W3/F AND HDB 15P/M.

4. ELECTRICAL TEST:

(1.) 100% OPEN, SHORT TEST.

(2.) INSULATION RESISTANCE: 1MΩ MIN.

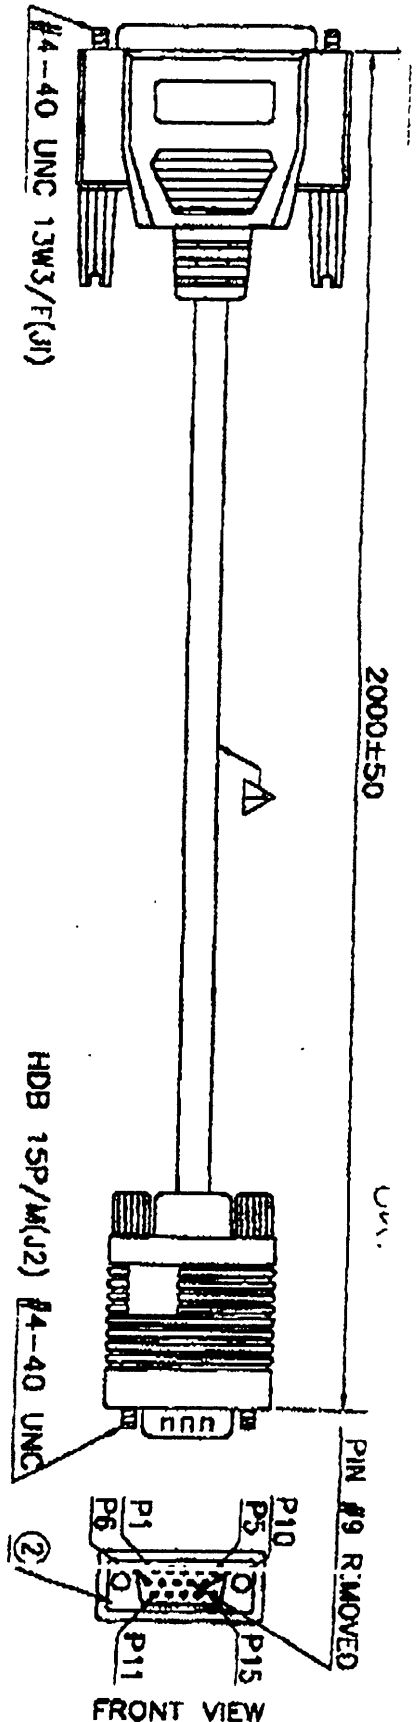

WIRE LIST

13W3/F (J1)	COLOR	HDB 15 P/M (J2)
A1 PIN	RED	CONDUCTOR 1
A1 SHELL		SHIELD 6
A2 PIN	GREEN	CONDUCTOR 2
A2 SHELL		SHIELD 7
A3 PIN	BLUE	CONDUCTOR 3
A3 SHELL		SHIELD 8
5+6	WHITE	CONDUCTOR 13
1+7		SHIELD 11
2	BLACK	CONDUCTOR 14
10+4		SHIELD 0+5
-	DRAIN WIRE	SHELL

2145

REV	DESCRIPTION	DATE	ECN/ECO NO.
UNIT	TOLERANCE	DRAW. BY	WHITE XU
SCALE	X	CHECKED	10/15/98
SHEET	XX	ASSEMBLY BY	10/17