

查询"NJM2508D"供应商 3-INPUT/2-INPUT VIDEO SWITCH

■ GENERAL DESCRIPTION

The NJM2508 is video switch for video and audio signal. It contains 3 input-1 output and 2 input-1 output video switch. One input terminal has clamp function and so is applied to fixed DC level of video signal. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 75dB (at $f=4.43\text{MHz}$).

■ FEATURES

- Operating Voltage (+4.75V ~ +13V)
- 3 Input-1 Output and 2 Input-1 Output
- Crosstalk 75dB (at 4.43MHz)
- Wide Frequency Range 10MHz (2V_{p-p} Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V⁺ 4.75~13.0V


■ APPLICATION

- VTR, Video Camera, AV-TV, Video Disk Player.


■ BLOCK DIAGRAM

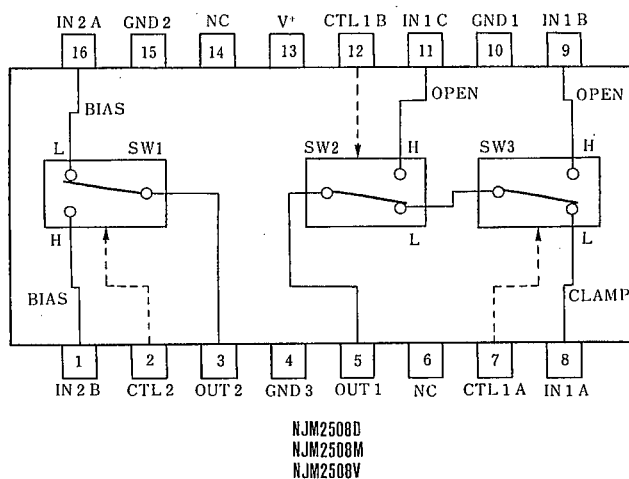

■ PACKAGE OUTLINE



NJM2508D



NJM2508M



NJM2508V

[查询"NJM2508D"供应商](#)

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	14	V
Power Dissipation	P _D	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW mW mW
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS


(V*=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current 1	I _{CC1}	V*=5V (Note1)	6.6	9.4	12.3	mA
Operating Current 2	I _{CC2}	V*=9V (Note1)	8.0	11.5	15.0	mA
Voltage Gain	G _v	V _i = 2V _{P-P} /100kHz, V _O /V _i	-0.6	-0.1	+0.4	dB
Frequency Response	G _f	V _i = 2V _{P-P} , V _O (10MHz/100MHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V _i = 2V _{P-P} Staircase Signal	—	0.3	—	%
Differential Phase	DP	V _i = 2V _{P-P} Staircase Signal	—	0.3	—	deg
Output Offset Voltage	V _{OS}	(Note2)	-10	0	+10	mV
Crosstalk	CT	V _i = 2V _{P-P} , 4.43MHz, V _O /V _i	—	-75	—	dB
Switch Change Voltage	V _{CH}	All inside SW: ON	2.5	—	—	V
Switch Change Voltage	V _{CL}	All inside SW: OFF	—	—	1.0	V

(Note1) S1=S2=S3=S4=S5=S6=S7=1

(Note2) Output DC Voltage Difference is tested on S6=1→2, S1=S2=S3=S4=S5=1, S8=2 and S7=1

■ TEST CIRCUIT

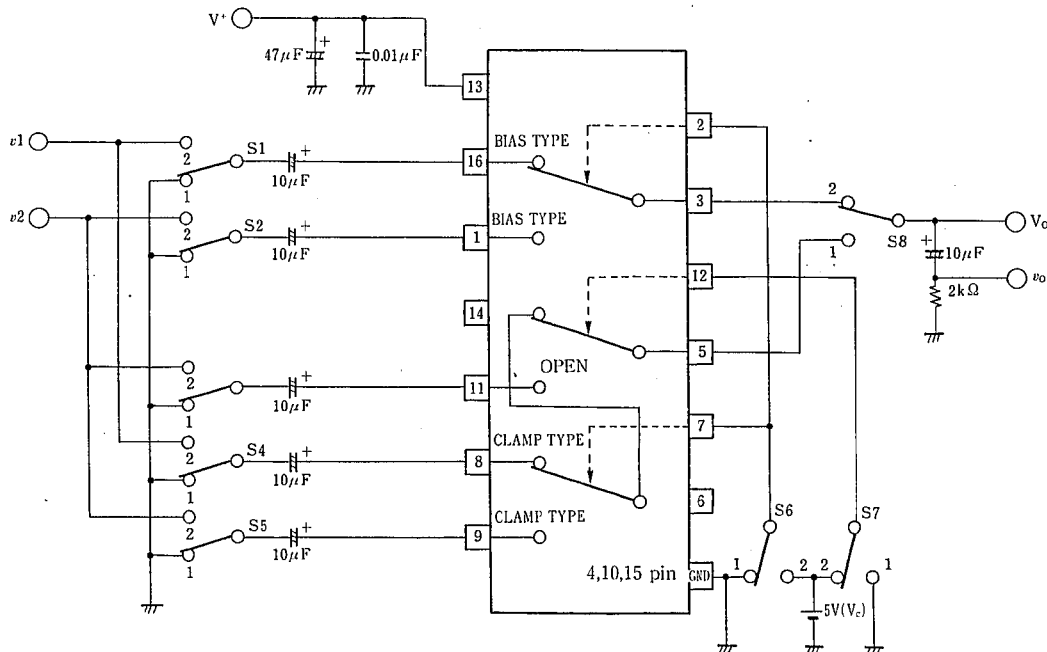

This IC requires 1MΩ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.


[查询"NJM2508D"供应商](#)

■ PIN FUNCTION


PIN NO.	PIN NAME	DC VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1	IN 2 A IN 2 B (Input)	2.5V	
8	IN 1 A (Input)	1.5V	
9 11	IN 1 B IN 1 C (Input)		
7 12 2	CTL 1 A CTL 1 B CTL 2 (Control)		
5	OUT 1 (Output)	1.8V	
3	OUT 2 (Output)	0.8V	
13	V+	5 V	
15 4 10	GND 1 GND 2 GND 3		

查询"NJM2508D"供应商


■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

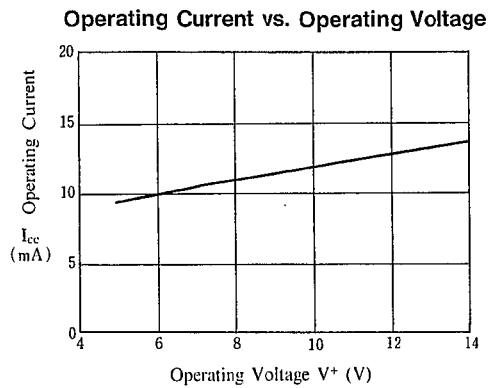


Operating Current vs. Ambient Temperature

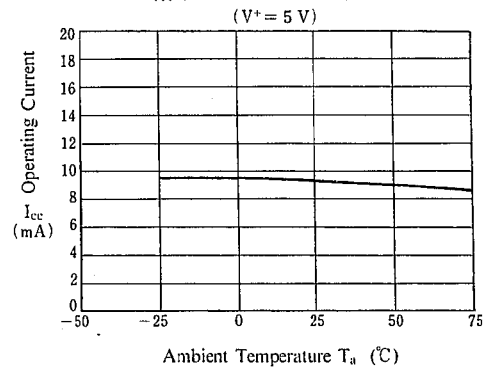


Operating Current vs. Ambient Temperature

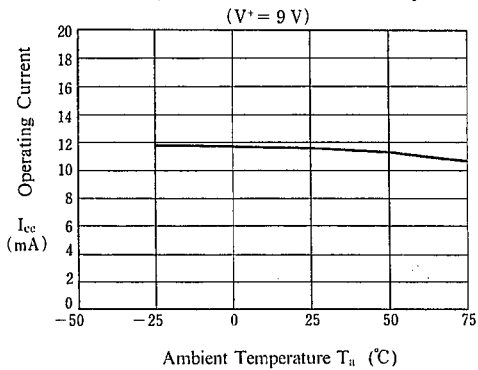


Voltage Gain vs. Operating Voltage

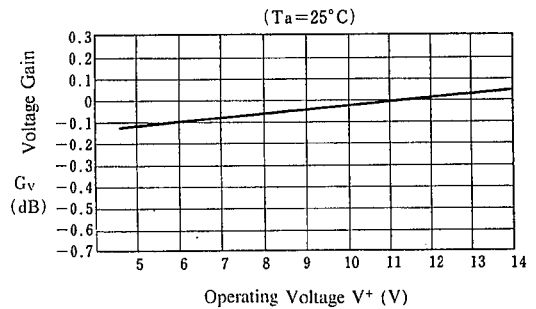







Voltage Gain vs. Frequency

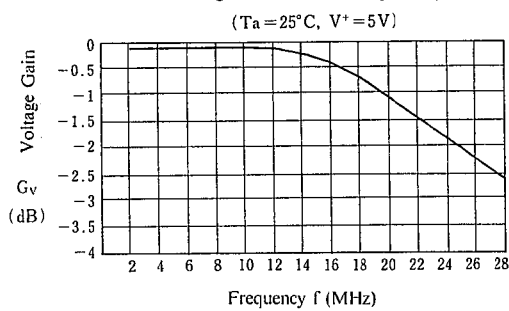

Voltage Gain vs. Ambient Temperature






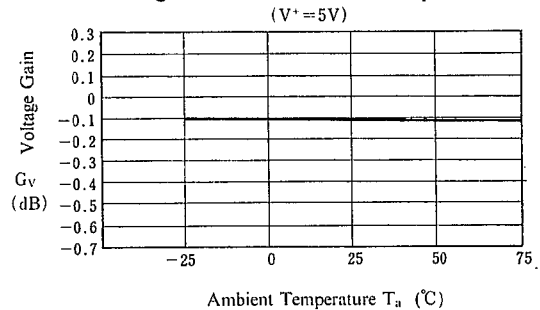


■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

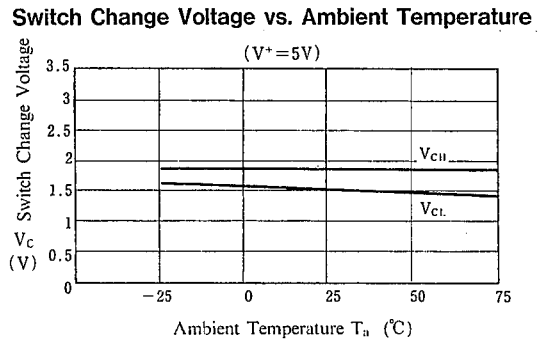
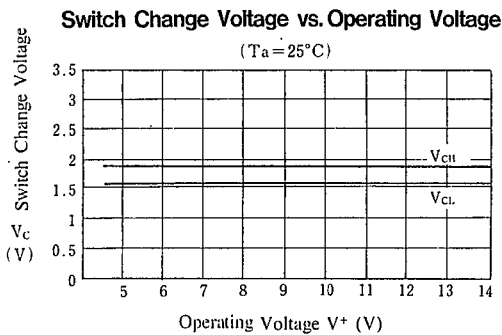
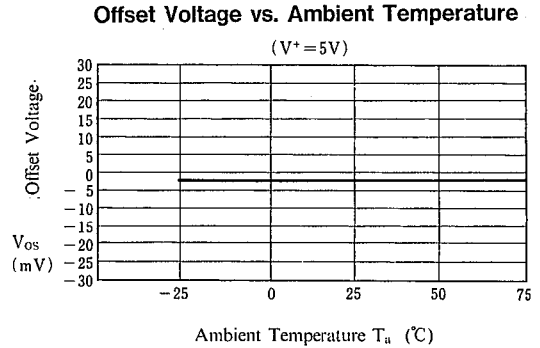
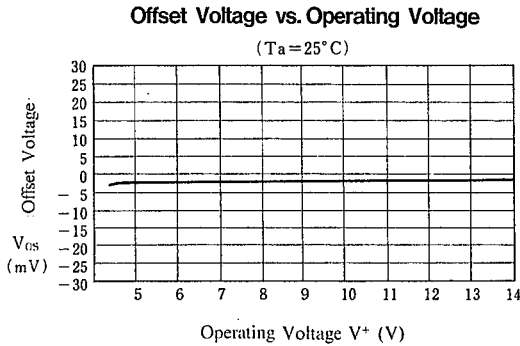
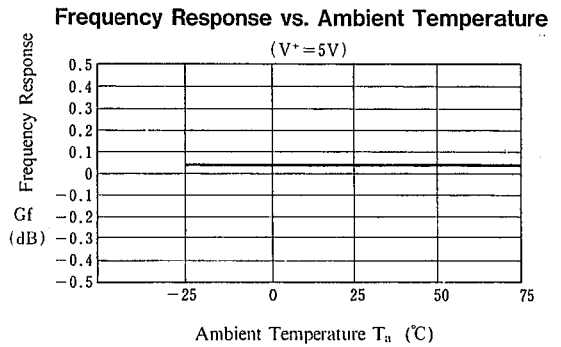
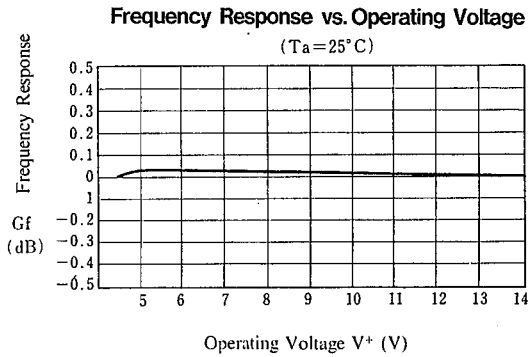


[查询"NJM2508D"供应商](#)

■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

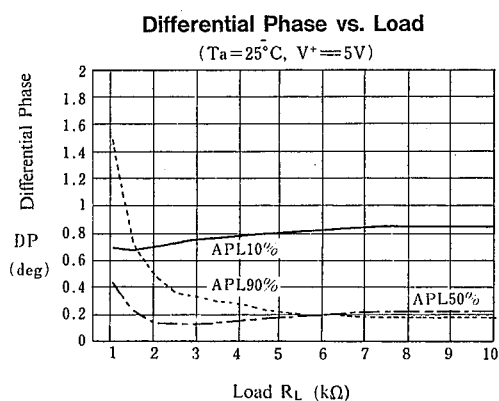
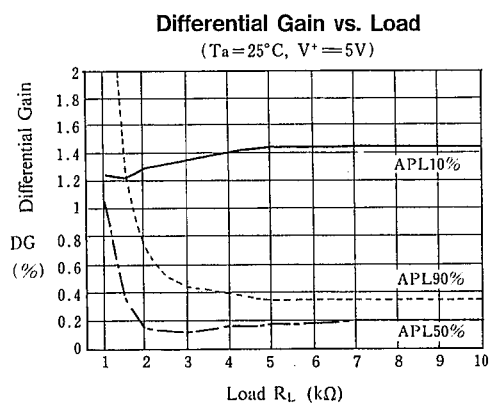
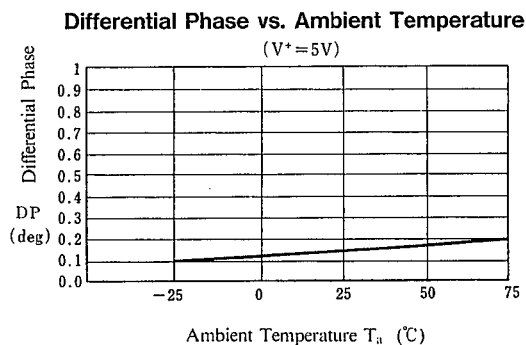
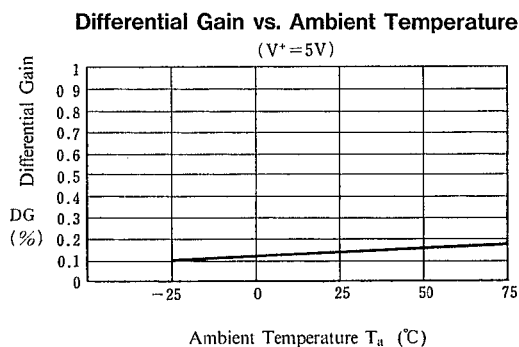
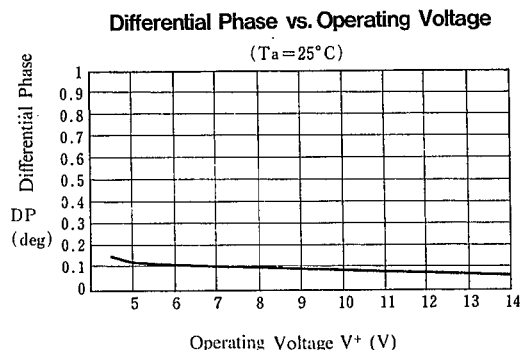
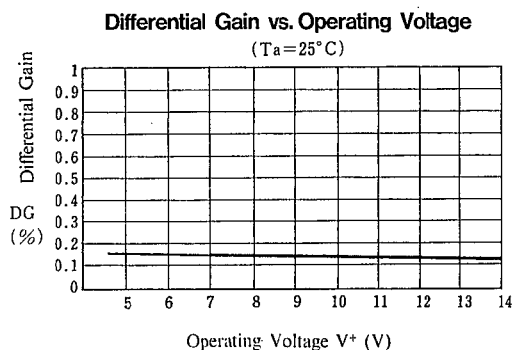


■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

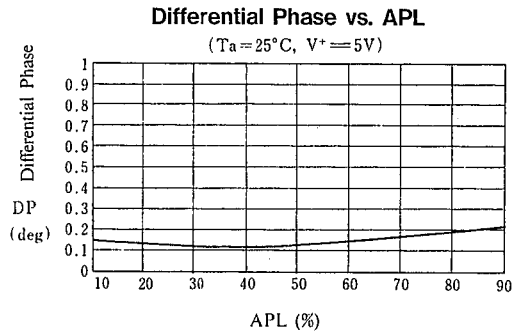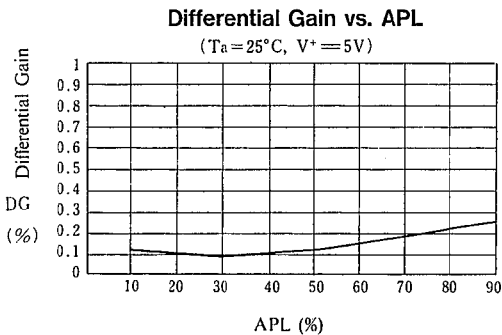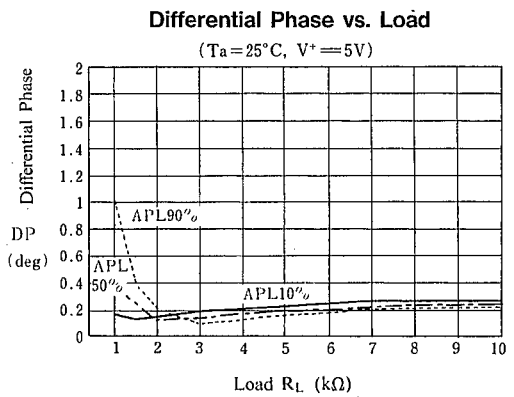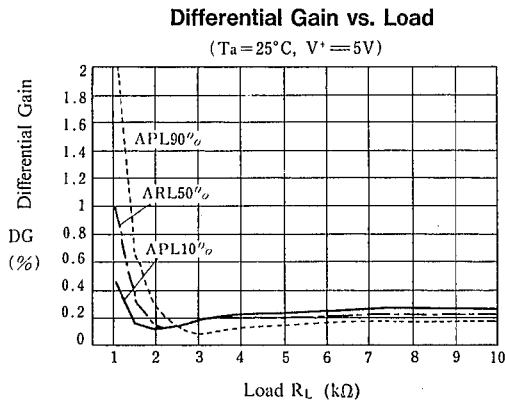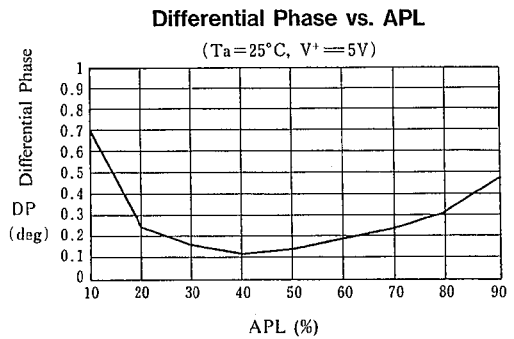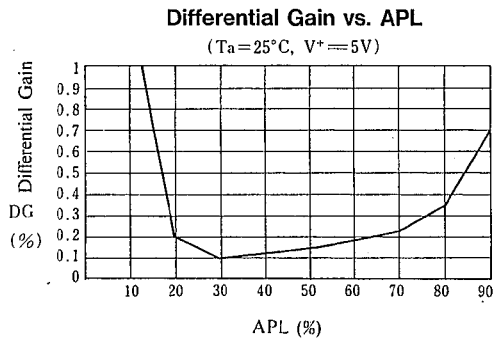


[查询"NJM2508D"供应商](#)

■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

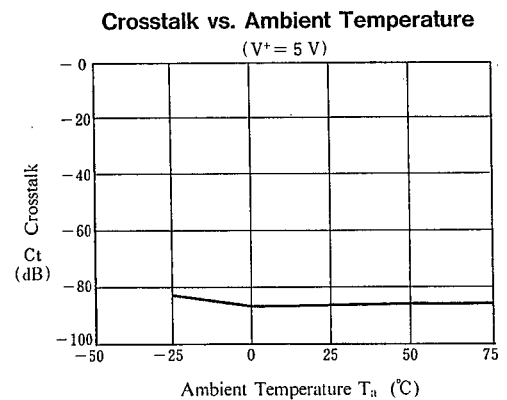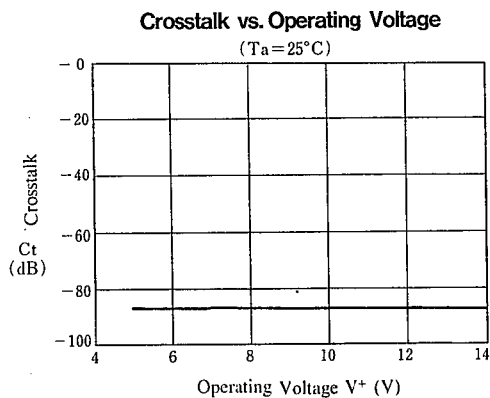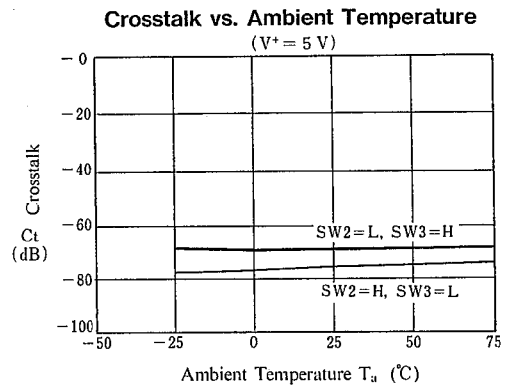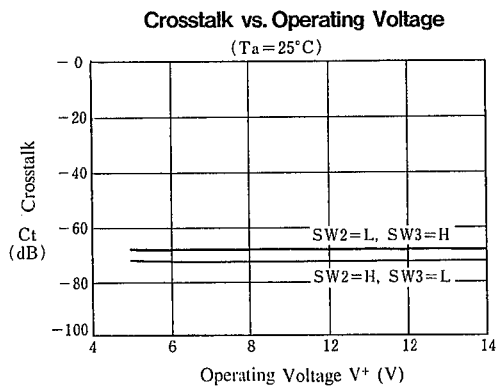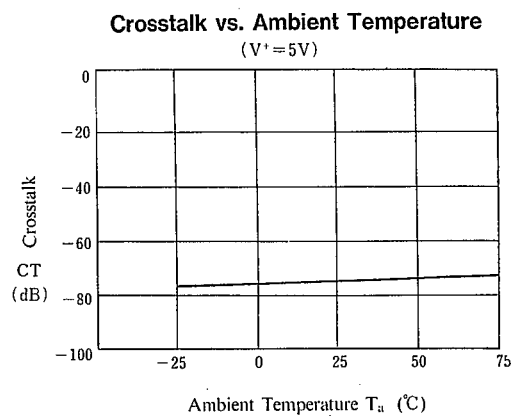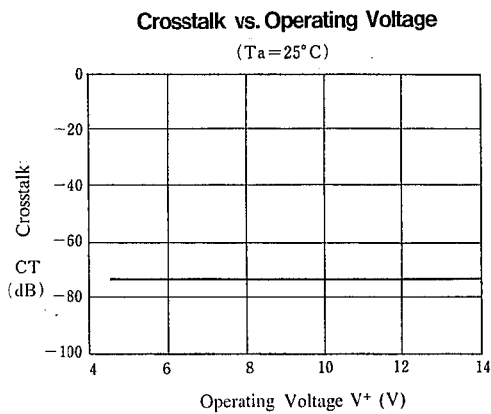

[查询"NJM2508D"供应商](#)

■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

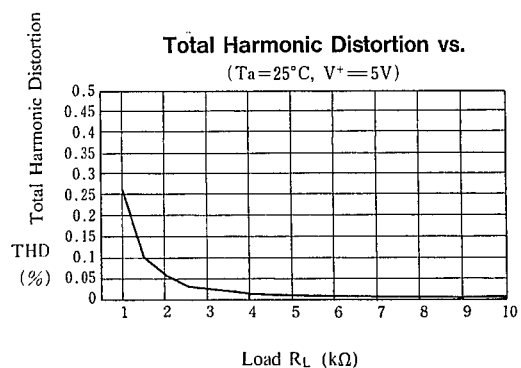

NJM2508

[查询"NJM2508D"供应商](#)

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.