

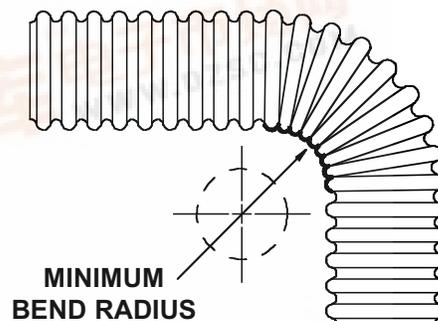


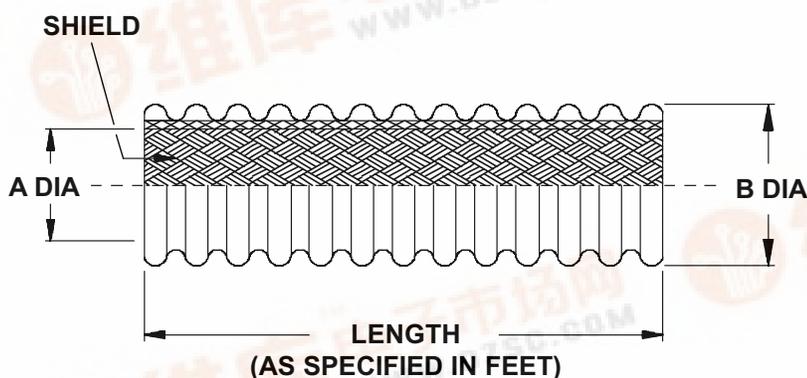

121-001-40 供应商

# 121-001 Type B Series 72 Annular Convulsed Tubing Thermally Stabilized Kynar®

## TYPE B INTERNAL TIN/COPPER BRAID

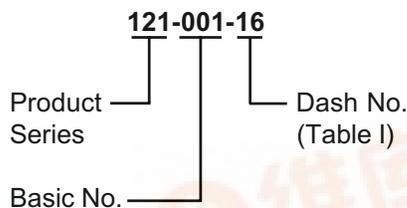

| DASH NO. | A DIA       |             | B DIA       |             | MINIMUM BEND RADIUS |
|----------|-------------|-------------|-------------|-------------|---------------------|
|          | MIN         | MAX         | MIN         | MAX         |                     |
| 09       | .17 (4.3)   | .21 (5.3)   | .38 (9.7)   | .42 (10.7)  | .75 (19.1)          |
| 12       | .26 (6.6)   | .30 (7.6)   | .48 (12.2)  | .52 (13.2)  | 1.00 (25.4)         |
| 16       | .38 (9.6)   | .43 (10.9)  | .60 (15.2)  | .66 (16.8)  | 1.38 (35.1)         |
| 20       | .50 (12.7)  | .55 (14.0)  | .71 (18.0)  | .77 (20.0)  | 1.69 (42.9)         |
| 24       | .62 (15.7)  | .68 (17.3)  | .88 (22.4)  | .94 (23.9)  | 1.88 (47.8)         |
| 28       | .74 (18.8)  | .80 (20.3)  | 1.00 (25.4) | 1.08 (27.4) | 2.00 (50.8)         |
| 32       | .86 (21.8)  | .93 (23.6)  | 1.12 (28.4) | 1.20 (30.5) | 2.38 (60.5)         |
| 40       | 1.11 (28.2) | 1.18 (30.0) | 1.36 (34.5) | 1.44 (36.6) | 2.88 (73.2)         |

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.  
For specific size lengths, consult factory.