

4



3

2

1

(b) STRIPPING DIMENSIONS
[查询"162A18419X"供应商](#)

used for: D-SUB HD

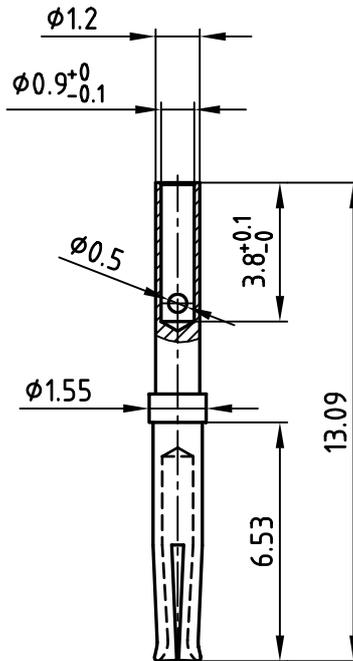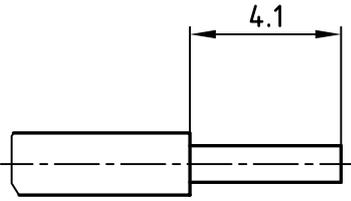

(b) NOTES:

1. CONTACTS: PHOSPHOR BRONCE
2. PLATING: 8 μ m HARD GOLD OVER min. 50 μ m NICKEL
3. CRIMPING: USE CRIMP TOOL 360X10329X
WITH TOOL INSERT 360X10629X
SELECTOR SETTINGS: 4 for AWG 22
3 for AWG 24
2 for AWG 26
1 for AWG 28

Directive 2002/95/EC
 „RoHS“
 Compliant

THIS DRAWING MAY NOT BE COPIED OR
 REPRODUCED IN ANY WAY, AND MAY NOT
 BE PASSED ON TO A THIRD PARTY WITHOUT
 WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

		tolerance				scale:	
		ISO 2768-m				5:1	
		2001	date	name		material: SEE NOTES	
		drawn	12.03.	Parei		title: HD CRIMP SOCKET CONTACT	
		appd.	12.03.	E. Mickenbecker		dwg no: AutoCAD 2000 DIN-A	
		norm				4	
		d-old				sh: 1/1	
2 x b	Ä 2647	11.01.2007	Lehmen			part no: 162A18419X	
a	Origin					16K1A153A	
rev.	description	date	name				

4

3

2

1