

Trimmers



I. Product Selection Guide .....6

II. Product Specifications .....9

III. Optional Products.....69

IV. Tape and Reel Packaging Specifications.....70

V. Panel Mounting Options.....72


VI. Adjustment Tools .....77

VII. Lab Design Kits .....77

VIII. Mil-Spec Part Numbering .....79

IX. Applications/Processing Guide.....83

X. Soldering and Cleaning Processes .....84

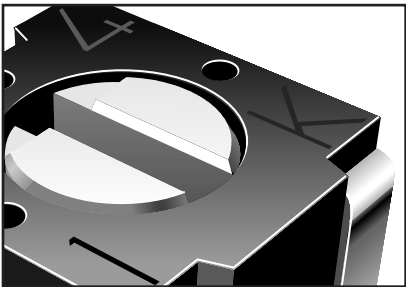

## SMT Trimmers - Product Selection Guide

**BOURNS®**

| Model Number | Element Technology |     | Number of Turns |       | Sealed Open |      | Size |     |     |     |      | Packaging Options | Adjust     | Page No. |
|--------------|--------------------|-----|-----------------|-------|-------------|------|------|-----|-----|-----|------|-------------------|------------|----------|
|              | Cermet             | W/W | Single          | Multi | Sealed      | Open | 2mm  | 3mm | 4mm | 5mm | 1/4" | See Note 1        | See Note 2 |          |
| 3214*        | •                  |     |                 | •     | •           |      |      |     | •   |     |      | E                 | T,S        | 12       |
| 3224*        | •                  |     |                 | •     | •           |      |      |     | •   |     |      | E                 | T,S        | 14       |
| 3269*        | •                  |     |                 | •     | •           |      |      |     |     |     | •    | G,T               | T,S        | 22       |
| 3302         | •                  |     | •               |       |             | •    | •    |     |     |     |      | E                 | T          | 32       |
| 3303         | •                  |     | •               |       |             | •    |      | •   |     |     |      | E                 | T,B        | 34       |
| 3313*        | •                  |     | •               |       | •           |      |      | •   |     |     |      | E                 | T,S        | 39       |
| 3314         | •                  |     | •               |       | •           |      |      |     | •   |     |      | E,G,T             | T,S        | 41       |
| 3324*        | •                  |     | •               |       | •           |      |      |     | •   |     |      | E                 | T          | 47       |
| 3364         | •                  |     | •               |       |             | •    |      |     | •   |     |      | E                 | T,B        | 56       |
| 3374*        | •                  |     | •               |       | •           |      |      |     | •   |     |      | E                 | T          | 58       |

NOTE 1: Standard packaging; some options may require alternate packaging. Consult factory.  
T = Tube, B = Bulk, E = Embossed Tape - 7" Reel, G = Embossed Tape - 13" Reel

NOTE 2: T = Top Adjustment, S = Side Adjustment, B = Bottom Adjustment

\*Indicates patented models.

# Commercial/Industrial Through-Hole Sealed

**BOURNS®**

| Model Number | Element Technology |    | Number of Turns |       | Size     |           |          |      |      |        | Packaging Options | Adjust     | Page No. |
|--------------|--------------------|----|-----------------|-------|----------|-----------|----------|------|------|--------|-------------------|------------|----------|
|              | Cermet             | WW | Single          | Multi | 1/4" Sq. | 5/16" Sq. | 3/8" Sq. | 1/2" | 3/4" | 1-1/4" | See Note 1        | See Note 2 |          |
| 3005**       |                    | •  |                 | •     |          |           |          |      | •    |        | T                 | S          | 69       |
| 3006         | •                  |    |                 | •     |          |           |          |      | •    |        | T                 | S          | 9        |
| 3009**       | •                  |    |                 | •     |          |           |          |      | •    |        | T,B               | S          | 69       |
| 3057         |                    | •  |                 | •     |          |           |          |      |      | •      | T,B               | S          | 10       |
| 3059         | •                  |    |                 | •     |          |           |          |      |      | •      | T,B               | S          | 11       |
| 3082**       | •                  |    |                 | •     |          |           |          | •    |      |        | T                 | S          | 69       |
| 3250         |                    | •  |                 | •     |          |           |          | •    |      |        | T,B               | T,S        | 16       |
| 3252         | •                  |    |                 | •     |          |           |          | •    |      |        | T,B               | T,S        | 17       |
| 3260         |                    | •  |                 | •     | •        |           |          |      |      |        | T                 | T,S        | 18       |
| 3262*        | •                  |    |                 | •     | •        |           |          |      |      |        | T                 | T,S        | 19       |
| 3266*        | •                  |    |                 | •     | •        |           |          |      |      |        | T,R               | T,S        | 20       |
| 3266-LTC     | •                  |    |                 | •     | •        |           |          |      |      |        | T                 | T,S        | 21       |
| 3290         |                    | •  |                 | •     |          |           | •        |      |      |        | T,B               | T,S        | 24       |
| 3292*        | •                  |    |                 | •     |          |           | •        |      |      |        | T,B               | T,S        | 25       |
| 3296*        | •                  |    |                 | •     |          |           | •        |      |      |        | T,R               | T,S        | 26       |
| 3296-LTC     | •                  |    |                 | •     |          |           | •        |      |      |        | T                 | T,S        | 27       |
| 3296-LC2*    | •                  |    |                 | •     |          |           | •        |      |      |        | T,B               | T,S        | 29       |
| 3296-OT1*    | •                  |    |                 | •     |          |           | •        |      |      |        | T                 | T,S        | 30       |
| 3299*        | •                  |    |                 | •     |          |           | •        |      |      |        | T,B               | T,S        | 31       |
| 3329         | •                  |    | •               |       | •        |           |          |      |      |        | T,B,R             | T,S        | 51       |
| 3339         | •                  |    |                 | •     |          | •         |          |      |      |        | T                 | T,S        | 52       |
| 3345**       |                    | •  | •               |       |          |           |          | •    |      |        | B                 | T,S        | 69       |
| 3362         | •                  |    | •               |       | •        |           |          |      |      |        | T,R               | T,S        | 54       |
| 3386         | •                  |    | •               |       |          |           | •        |      |      |        | T,B,R             | T,S        | 59       |
| 3386-HV2     | •                  |    | •               |       |          |           | •        |      |      |        | T                 | T,S        | 61       |
| 3386-HV3     | •                  |    | •               |       |          |           | •        |      |      |        | T                 | T,S        | 61       |
| 3386-OT1     | •                  |    | •               |       |          |           | •        |      |      |        | T,B               | T          | 62       |

NOTE 1: Standard packaging; some options may require alternate packaging. Consult factory.  
T = Tube, B = Bulk, R = Tape and Reel

NOTE 2: T = Top Adjustment, S = Side Adjustment

\*Indicates patented models.

\*\*Optional products (not recommended for new designs).

Specifications are subject to change without notice.

## Open Frame Trimmers

**BOURNS®**

| Model Number | Element Technology |        | Number of Turns |       | Mounting Type |        | Size |     |     |     |     |      | Packaging Options | Adjust     | Page No. |
|--------------|--------------------|--------|-----------------|-------|---------------|--------|------|-----|-----|-----|-----|------|-------------------|------------|----------|
|              | Cermet             | Carbon | Single          | Multi | SMT           | Leaded | 2mm  | 3mm | 4mm | 6mm | 9mm | 3/8" | See Note 1        | See Note 2 |          |
| 3302         | •                  |        | •               |       | •             |        | •    |     |     |     |     |      | E                 | T          | 32       |
| 3303         | •                  |        | •               |       | •             |        |      | •   |     |     |     |      | E                 | T,B        | 34       |
| 3306         | •                  |        | •               |       |               | •      |      |     |     | •   |     |      | B                 | T,S        | 36       |
| 3309         | •                  |        | •               |       |               | •      |      |     |     |     | •   |      | B                 | T,S,B      | 37       |
| 3318         |                    | •      | •               |       |               | •      |      |     |     | •   |     |      | B                 | T,S        | 44       |
| 3319         |                    | •      | •               |       |               | •      |      |     |     |     | •   |      | B                 | T,S,B      | 45       |
| 3328         |                    | •      | •               |       |               | •      |      |     |     |     | •   |      | B                 | T,S,B      | 49       |
| 3352         | •                  |        | •               |       |               | •      |      |     |     |     |     | •    | B                 | T,S        | 53       |
| 3364         | •                  |        | •               |       | •             |        |      |     | •   |     |     |      | E                 | T          | 56       |
| TC76         |                    | •      | •               |       |               | •      |      |     |     | •   |     |      | B, T&R, A         | T,S,B      | 65       |

## Application Specific Products

| Model Number | Element Technology |    | Number of Turns |       | Size |       |      |      |      |        | Packaging Options | Adjust     | Page No. |
|--------------|--------------------|----|-----------------|-------|------|-------|------|------|------|--------|-------------------|------------|----------|
|              | Cermet             | WW | Single          | Multi | 1/4" | 5/16" | 3/8" | 1/2" | 3/4" | 1-1/4" | See Note 1        | See Note 2 |          |
| 3266-LTC     | •                  |    |                 | •     | •    |       |      |      |      |        | T                 | T,S        | 21       |
| 3296-LTC     | •                  |    |                 | •     |      |       | •    |      |      |        | T                 | T,S        | 27       |
| 3296-LC2*    | •                  |    |                 | •     |      |       | •    |      |      |        | T                 | T,S        | 29       |
| 3296-OT1*    | •                  |    |                 | •     |      |       | •    |      |      |        | T                 | T,S        | 30       |
| 3386-HV2     | •                  |    | •               |       |      |       | •    |      |      |        | T                 | T,S        | 61       |
| 3386-HV3     | •                  |    | •               |       |      |       | •    |      |      |        | T                 | T,S        | 61       |
| 3386-OT1*    | •                  |    | •               |       |      |       | •    |      |      |        | T,B               | T          | 62       |


## Military Products

| Model Number | Element Technology |     | Turns  |       | Size |      |      |        | Packaging Options | Adjust     | Page No. |
|--------------|--------------------|-----|--------|-------|------|------|------|--------|-------------------|------------|----------|
|              | Cermet             | W/W | Single | Multi | 1/4" | 3/8" | 1/2" | 1-1/4" | See Note 1        | See Note 2 |          |
| RJ 22        | •                  |     |        | •     |      |      | •    |        | T,B               | T,S        | 17       |
| RJ/RJR 24*   | •                  |     |        | •     |      | •    |      |        | T,B               | T,S        | 28       |
| RJ/RJR 26    | •                  |     |        | •     | •    |      |      |        | T                 | T,S        | 19       |
| RT/RTR 22    |                    | •   |        | •     |      |      | •    |        | T,B               | T,S        | 16       |
| RT/RTR 24    |                    | •   |        | •     |      | •    |      |        | T                 | T,S        | 24       |
| RT 26        |                    | •   |        | •     | •    |      |      |        | T                 | T,S        | 18       |

NOTE 1: Standard packaging; some options may require alternate packaging. Consult factory.  
T = Tube, B = Bulk, E = Embossed Tape - 7" Reel, G = Embossed Tape - 13" Reel  
T&R = Tape & Reel, A = Ammo Pak

\* Indicates patented models.

NOTE 2: T = Top Adjustment, S = Side Adjustment,  
B = Bottom Adjustment

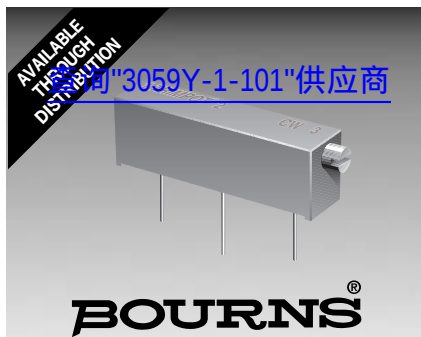

## Features

- 3/4" Rectangular / Multiturn Cermet / Industrial / Sealed
- Low PC board profile - only 1/4" high
- Panel mount option available, (see page 72 for details)

- Transparent housing available, can be set visually without hook-up and instrumentation ("P" style only)

## 3006 - Trimpot® Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 5 megohms  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....1.0% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation .....1.0% or 1 ohm max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.01%  
Resistance .....±0.05%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....1,000 vac  
80,000 Feet .....250 vac  
Adjustment Angle .....15 turns nom.


### Environmental Characteristics

Power Rating (400 volts max.)  
70°C .....0.75 watt  
125°C .....0 watt  
Temperature Range .....-55°C to +125°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 103  
96 hours  
(3% ΔTR, 20 Megohms IR)  
Vibration.....20G (2% ΔTR; 2% ΔVR)  
Shock.....50G (2% ΔTR; 2% ΔVR)  
Load Life .....1,000 hours 0.75 watt 70°C  
(4% ΔTR)  
Rotational Life .....200 cycles  
(3% ΔTR; 1% or 1 ohm,  
whichever is greater, CRV)


### Physical Characteristics

Torque .....5.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.04 oz.  
Marking .....Manufacturer's  
trademark, resistance code,  
terminal numbers, date code,  
manufacturer's model number  
and style  
Wiper Positioning .....50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....25 pcs. per tube  
Adjustment Tool .....H-90


### Common Dimensions

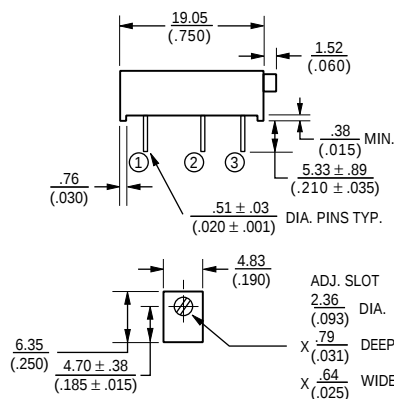



### 3006P



### 3006W



### 3006Y



### How To Order

**3006 P - 1 - 103 Z**  
Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified Product Indicator \_\_\_\_\_  
-1 = Standard Product  
-7 = Transparent Housing  
Resistance Code \_\_\_\_\_  
Optional Suffix Letter \_\_\_\_\_  
Z = Panel Mount (Factory Installed)  
Consult factory for other available options.

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| <b>200,000</b>    | <b>204</b>      |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |


Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

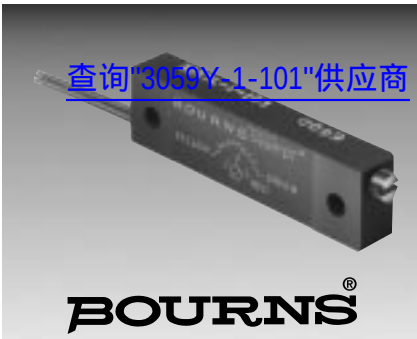

## Features

- 1-1/4" Rectangular / Multiturn Wirewound / Industrial / Sealed
- Panel mount option available (see page 72 for details)

## 3057 - Trimpot® Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 50K ohms  
(see standard resistance table)  
Resistance Tolerance .....±5% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....0.1% or 1 ohm max.  
(whichever is greater)  
Noise .....100 ohms ENR max.  
Resolution .....See Resistance Table  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....1,500 vac  
70,000 Feet .....400 vac  
Adjustment Travel .....22 turns nom.

### Environmental Characteristics

Power Rating @ 70°C .....1 watt  
Power Rating @ 150°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient .....±50ppm/°C  
Seal Test .....85°C Fluorinert\*  
(pin styles only)  
Humidity .....MIL-STD-202 Method 106  
96 hours  
2% ΔTR, 100 Megohms IR)  
Vibration .....30G (1% ΔTR; 0.5%  
+ resolution ΔVR)  
Shock .....100G (1% ΔTR; 0.5%  
+ resolution ΔVR)  
Load Life .....1,000 hours 1 watt @ 70°C  
(2% ΔTR)  
Rotational Life .....200 cycles (2% ΔTR)


### Physical Characteristics

Torque .....5.0 oz-in. max.  
Mechanical Stops .....Wiper idles  
Terminals .....Solderable pins and lugs  
Flexible leads .....(7 strands of 30 AWG)  
Weight .....0.10 oz.  
Marking .....Manufacturer's trademark,  
resistance code, terminal numbers,  
date code, manufacturer's model  
number and style  
Wiper .....Set at CW end  
Flammability .....U.L. 94V-0  
Standard Packaging  
P&Y Style .....10 pcs. per tube  
L&J Style .....25 pcs. per bag  
Adjustment Tool .....H-90


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

### 3057L


#### Common Dimensions

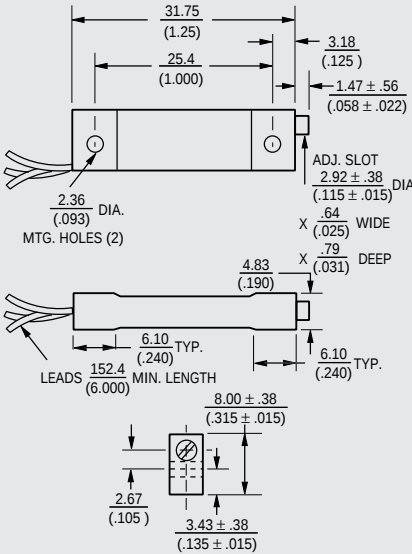

### 3057J

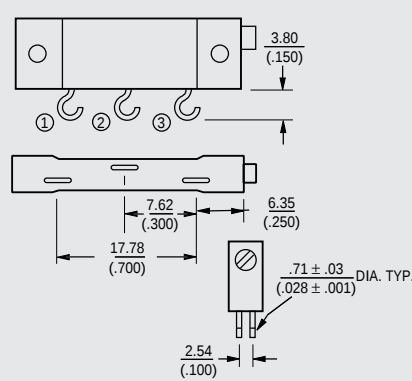

### 3057P

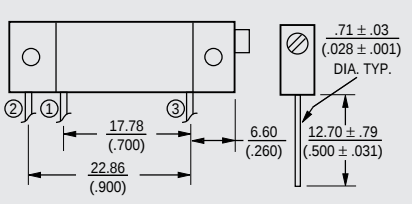

### How To Order

Model 3057 L - 1 - 103 M



Style \_\_\_\_\_

Standard or Modified Product Indicator  
-1 = Standard Product

Resistance Code \_\_\_\_\_

Optional Suffix Letter \_\_\_\_\_  
M = Panel Mount  
(Factory Installed)

### 3057Y

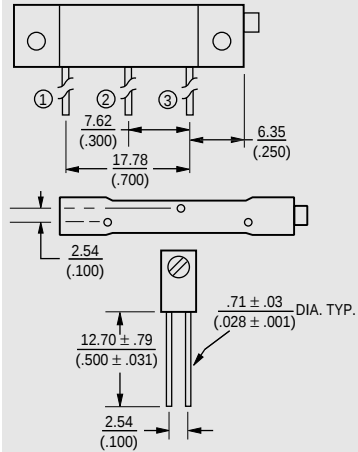

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code | Nominal Resolution (Percent) |
|-------------------|-----------------|------------------------------|
| 10                | 100             | 2.40                         |
| 20                | 200             | 1.90                         |
| 50                | 500             | 1.40                         |
| 100               | 101             | 1.00                         |
| 200               | 201             | 0.86                         |
| 500               | 501             | 0.89                         |
| 1,000             | 102             | 0.72                         |
| 2,000             | 202             | 0.58                         |
| 5,000             | 502             | 0.43                         |
| 10,000            | 103             | 0.34                         |
| 20,000            | 203             | 0.31                         |
| 50,000            | 503             | 0.24                         |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

Specifications are subject to change without notice.

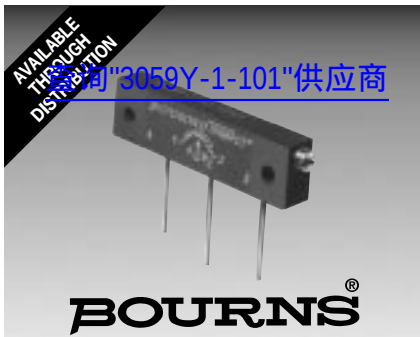

## Features

- 1-1/4" Rectangular / Multiturn  
Cermet / Industrial / Sealed
- Panel mount option available  
(see page 72 for details)

# 3059 - Trimpot® Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range  
.....10 to 2 megohms  
(see standard resistance table)

Resistance Tolerance .....±10% std.  
(tighter tolerance available)

Absolute Minimum Resistance  
.....1% or 2 ohms max.  
(whichever is greater)

Contact Resistance Variation  
.....1.0% or 1 ohm max.  
(whichever is greater)

Adjustability  
Voltage .....±0.01%  
Resistance .....±0.05%

Resolution.....Infinite

Insulation Resistance .....500 vdc.  
1,000 megohms min.

Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet .....350 vac  
Effective Travel.....22 turns nom.

## Environmental Characteristics

Power Rating @ 70°C (400 volts max.)  
.....1.0 watt

Power Rating @ 150°C.....0 watt

Temperature Range .....-55°C to +150°C

Temperature Coefficient .....±100ppm/°C

Seal Test .....85°C Fluorinert\*  
(pin styles only)

Humidity.....MIL-STD-202 Method 106  
(2% ΔTR, 10 Megohms IR)

Vibration.....20G (1% ΔTR; 1% ΔVR)

Shock.....50G (1% ΔTR; 1% ΔVR)

Load Life ..1,000 hours 1.0 watt @ 70°C  
(3% ΔTR; 1% or 1 ohms,  
whichever is greater, CRV)

Rotational Life .....200 cycles  
(2% ΔTR; 1% or 1 ohm,  
whichever is greater, CRV)

## Physical Characteristics

Torque .....5.0 oz-in. max.

Mechanical Stops.....Wiper idles

Terminals.Solderable printed circuit pins

Flexible leads .....(7 strands of 30 AWG)

Weight .....0.1 oz.

Marking .....Manufacturer's trademark,  
.....resistance code, terminal  
.....numbers, date code, manufacturer's  
.....model number and style

Wiper .....Set at CW end

Flammability .....U.L. 94V-0


Standard Packaging  
P&Y Styles .....10 pcs. per tube  
L&J Styles .....25 pcs. per bag

Adjustment Tool .....H-90


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

## 3059L


### Common Dimensions

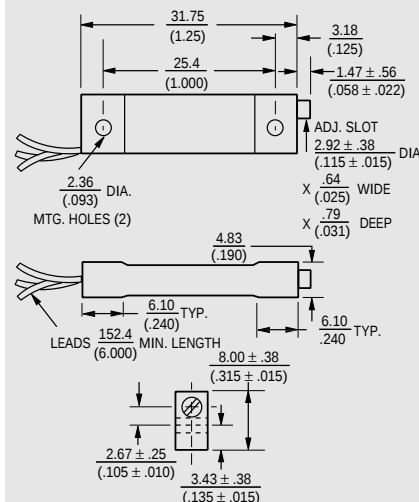

## 3059J

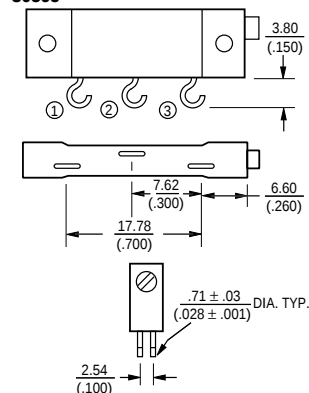

## 3059P

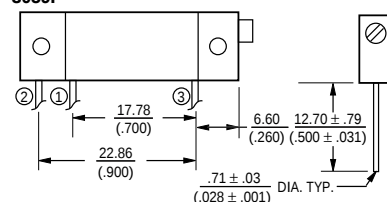

## How To Order

**3059 L - 1 - 103 M**

Model \_\_\_\_\_



Style \_\_\_\_\_

Standard or Modified Product Indicator \_\_\_\_\_  
-1 = Standard Product

Resistance Code \_\_\_\_\_

Optional Suffix Letter \_\_\_\_\_  
M = Panel Mount (Factory Installed)

## 3059Y

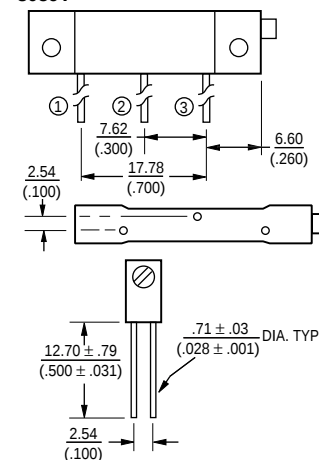

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC (INCHES)

## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

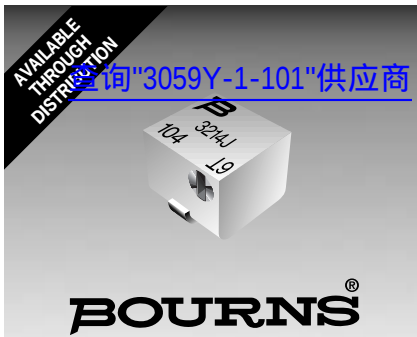

## Features

- Surface Mount 4mm Square / Multiturn Cermet / Industrial / Sealed
- Sealed to withstand board wash processing
- Pick and place centering design, with flush adjustment

- 4mm design meets EIA/EIAJ/IPC/VRCI SMD standard trimmer footprint
- Top and side adjust styles
- J-hook, and gull-wing
- Patent #5047746 advanced drive/wiper mechanism

## 3214 - 5-Turn Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 2 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
Absolute Minimum Resistance .....1% or 2.0 ohms  
(whichever is greater)  
Contact Resistance Variation .....3% or 3 ohms max.  
Resolution.....Essentially Infinite  
Insulation Resistance .....500 vdc.  
100 megohms min.  
Dielectric Strength  
Sea Level .....600 vac (1minute)  
Adjustment Angle .....5 turns nom.


### Environmental Characteristics

Power Rating (300 volts max.)  
85°C .....0.25 watt  
150°C .....0 watt  
Temperature Range.....-65°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Humidity .....MIL-STD 202 Method 106  
TRS ±2%; IR 10 megohms  
Vibration .....20G TRS±1%; VRS ±1%  
Shock .....100G TRS ±1%; VRS±1%  
Load Life  
.....@ 85°C rated power 1,000 hours  
TRS 3 ohms or 3%  
(whichever is greater)  
Rotational Cycling.....200 cycles  
TRS 3 ohms or 3%  
(whichever is greater)  
Thermal Shock.....5 cycles  
TRS±2%; VRS±1%



### Physical Characteristics

Mechanical Stop .....Wiper idles  
Torque .....180g-cm max.  
Weight .....Approximately 0.01 oz.  
Marking .....Manufacturer's code,  
resistance code and date code  
Solderability .....Per MIL-STD-202,  
Method 208  
Wiper .....Set at 50% nominal  
Flammability .....UL94V0  
Pushover Strength ..2 Kilograms (4.4lbs)  
Adjustment Tool .....H-91

#### 3214G Side Adjust

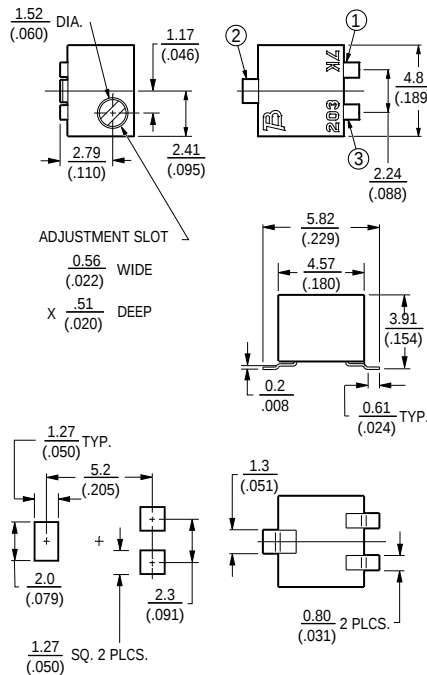

#### 3214J Side Adjust

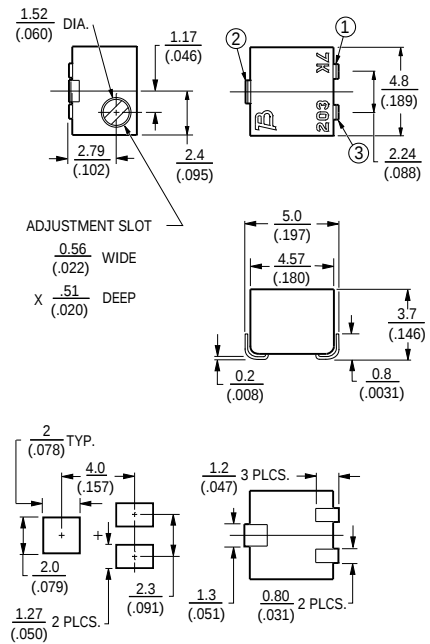

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)


### How To Order

3214 J - 1 - 502 E

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified Product Indicator \_\_\_\_\_  
-1 = Standard Product - IR Reflow  
\* -2 = Wave Solderable  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator \_\_\_\_\_  
Style J, G: 500 pcs./7" reel (standard)  
Style W: 250 pcs./7" reel (standard)

Consult factory for other available options.  
\* -2 has a treated stainless steel shaft

#### 3214W Top Adjust

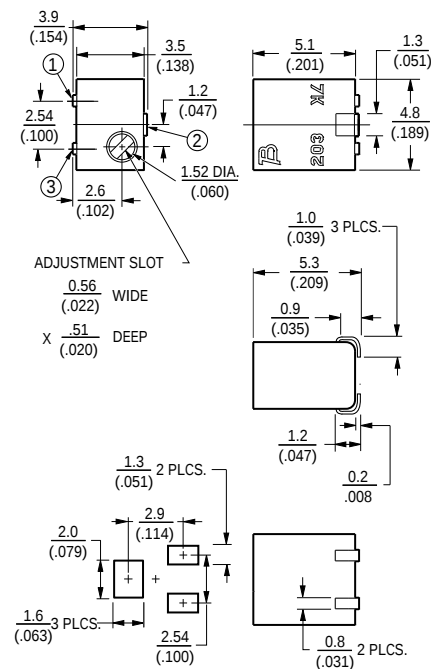


Specifications are subject to change without notice.

## 3214 - Packaging Specifications

**BOURNS®**

### Packaging Specifications

#### (J & G Styles)

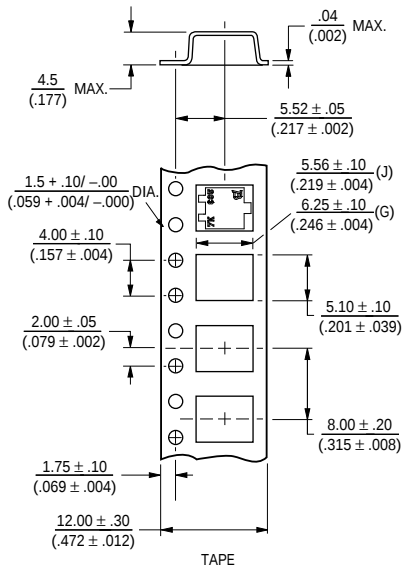


Cover tape peel strength:  
Meets EIA specification 481.

Units packaged 500 pieces per reel.

### Packaging Specifications

#### (W Style)

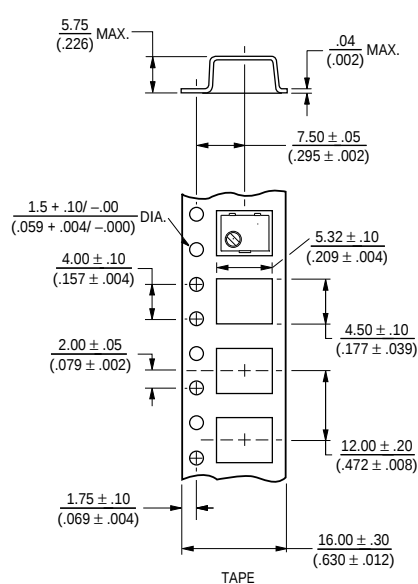

Cover tape peel strength:  
Meets EIA specification 481.


Units packaged 250 pieces per reel.

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

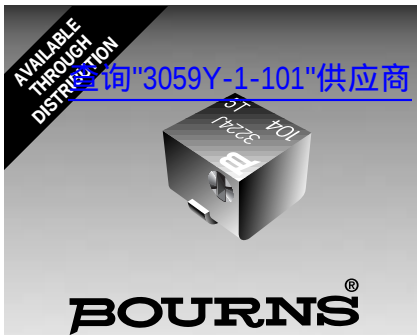

## Features

- Surface Mount 4mm Square / Multiturn Cermet / Industrial / Sealed
- Sealed to withstand board wash processing
- Pick and place centering design, with flush adjustment

- 4mm design meets EIA/EIAJ/IPC/VRCI SMD standard trimmer footprint
- Low CRV - 1%
- DESC selected material drawing #92021

## 3224 - 4mm SMD Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 2 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
Absolute Minimum Resistance .....1% or 2.0 ohms  
(whichever is greater)  
Contact Resistance Variation .....1% or 3 ohms max.  
Resolution.....Essentially Infinite  
Insulation Resistance .....500 vdc.  
100 megohms min.  
Dielectric Strength  
Sea Level .....600 vac (1minute)  
Adjustment Angle .....11 turns nom.

### Environmental Characteristics

Power Rating (300 volts max.)  
85°C .....0.25 watt  
150°C .....0 watt  
Temperature Range .....-65°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Humidity .....MIL-STD 202 Method 106  
TRS ±2%; IR 10 megohms  
Vibration .....20G TRS±1%; VRS ±1%  
Shock .....100G TRS ±1%; VRS±1%  
Load Life  
.....@ 85°C rated power 1,000 hours  
TRS 3 ohms or 3% (whichever is greater)  
Rotational Cycling.....200 cycles  
TRS 3 ohms or 3% (whichever is greater)  
Thermal Shock .....5 cycles  
TRS±2%; VRS±1%

### Physical Characteristics


Mechanical Stop .....Wiper idles  
Torque .....180g-cm max.  
Weight .....Approximately 0.01 oz.  
Marking .....Manufacturer's code,  
resistance code and date code  
Solderability .....Per MIL-STD-202,  
Method 208  
Wiper .....Set at 50% nominal  
Flammability .....UL94V0  
Adjustment Tool .....H-91

### How To Order


**3224 J - 1 - 502 E**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified  
Product Indicator  
-1 = Standard Product - IR Reflow  
\*-2 = Wave Solderable  
-FW5 = .070" ± .010" Shaft Extension  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator  
Style J, G: 500 pcs./7" reel (standard)  
Style W: 250 pcs./7" reel (standard)  
Consult factory for other available options.  
\*-2 has a treated stainless steel shaft


### 3224J Side Adjust

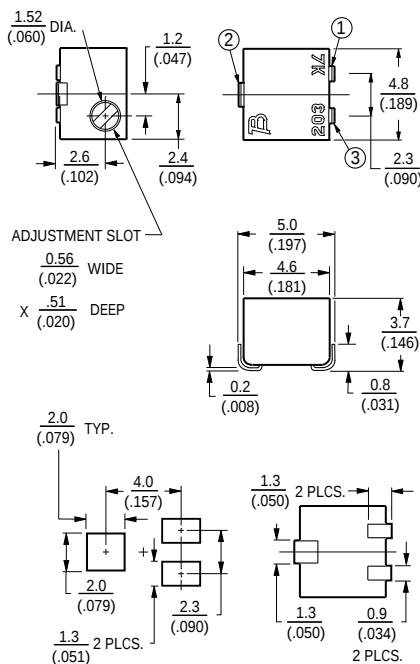


### 3224G Side Adjust

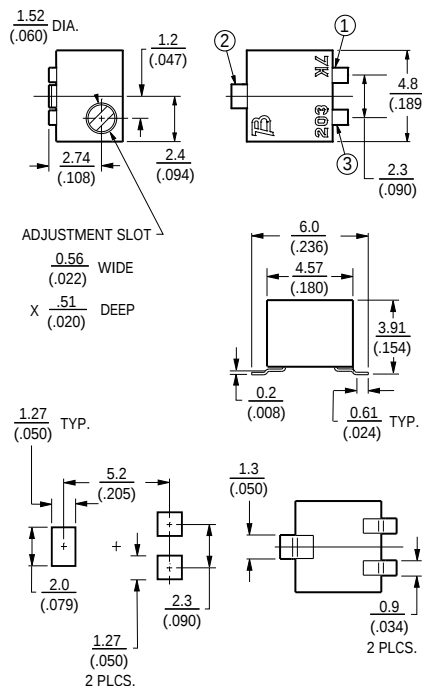

### 3224W Top Adjust

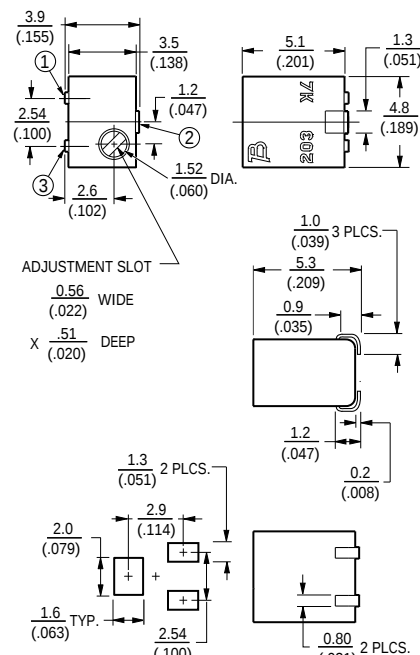

### 3224X Top Adjust

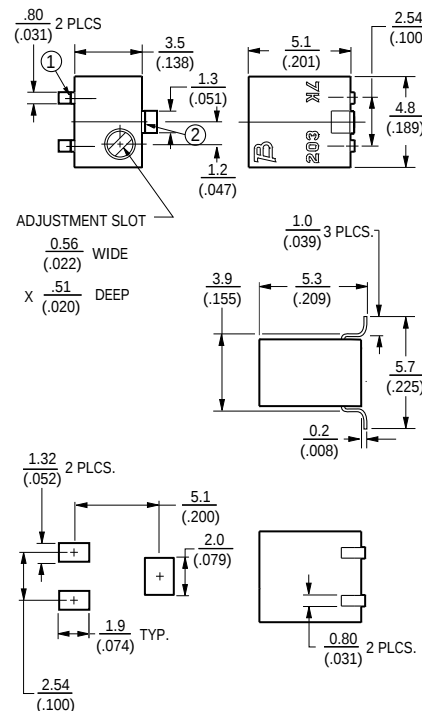

## Additional Features



- Top and side adjust styles
- J-hook, and gull-wing
- Patent #5047746 advanced drive/wiper mechanism

查询 30997-P-101 供应商

## 3224 - Packaging Specifications


**BOURNS®**

### J & G Styles

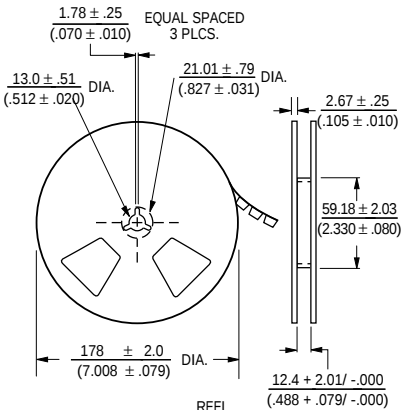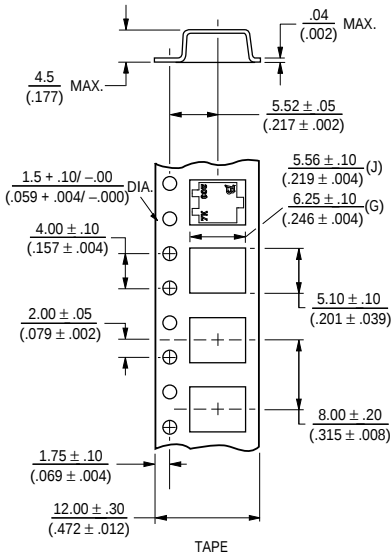


Cover tape peel strength:  
Meets EIA specification 481.


Units packaged 500 pieces per reel.



### W Style

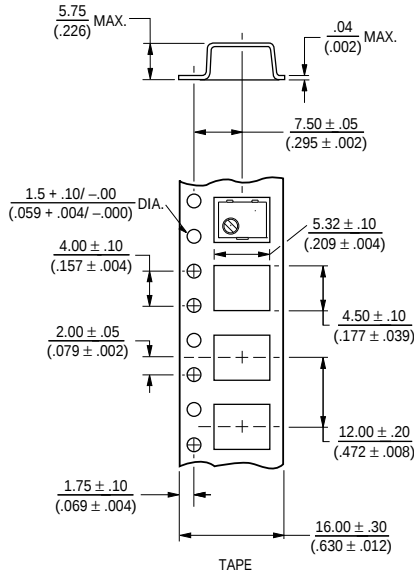

### W & X Style Reel

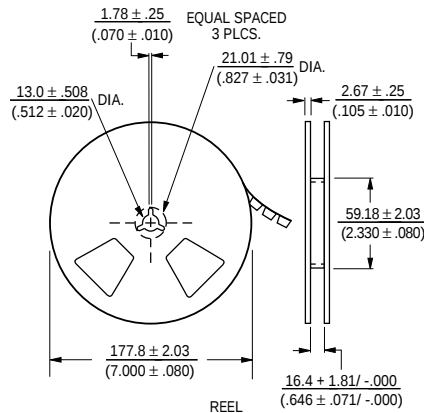


Cover tape peel strength:  
Meets EIA specification 481.

Units packaged 250 pieces per reel. (w)  
Units packaged 200 pieces per reel. (x)

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

### X Style

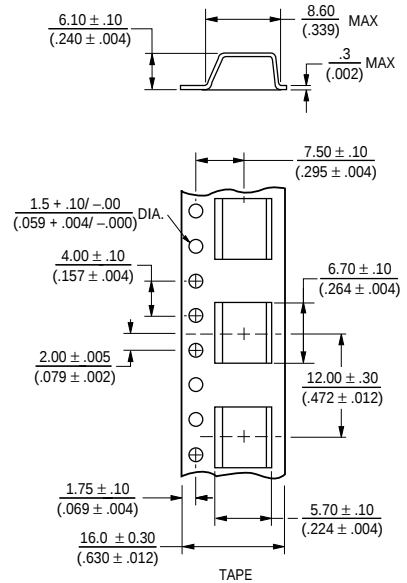


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

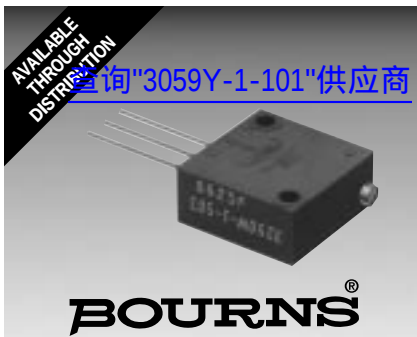

## Features

- Multiturn / Wirewound / Sealed
- Listed on the QPL for style RT22 per MIL-R-27208 and RTR22 per High-Rel MIL-R-39015
- Panel Mount option available (see page 73 for details)

## 3250/RT22/RTR22 - 1/2" Square Trimming Potentiometer

### Electrical Characteristics

#### Standard Resistance Range

|       |                 |
|-------|-----------------|
| 3250  | 10 to 50K ohms  |
| RT22  | 50 to 20K ohms  |
| RTR22 | 500 to 20K ohms |

(see standard resistance table)

Resistance Tolerance.....±5% std.  
(tighter tolerance available)

#### Absolute Minimum Resistance

.....0.1% or 1 ohm max. (whichever is greater)

Noise.....100 ohms ENR max.

Resolution.....See Resistance Table

Insulation Resistance.....500 vdc.  
1,000 megohms min.

#### Dielectric Strength

Sea Level.....1,000 vac

80,000 Feet.....400 vac

Adjustment Travel.....25 turns nom.

### Environmental Characteristics

#### Power Rating @ 85°C

3250.....1.0 watt

RT22/RTR22.....0.75 watt

Power Rating @ 150°C.....0 watt

Temperature Range.....-65°C to +150°C

#### Temperature Coefficient

3250.....±50ppm/°C

RT22/RTR22.....±50ppm/°C

Seal Test.....85°C Fluorinert\* (pin styles only)

Humidity.....MIL-STD-202 Method 106

3250.....(2% ΔTR; 100 Megohms IR)

RT22.....(1% ΔTR; 10 Megohms IR)

RTR22.....(1% ΔTR; 100 Megohms IR)

Vibration.....30G

(1% ΔTR; 0.5% + resolution ΔVR)

Shock.....100G

(1% ΔTR; 0.5% + resolution ΔVR)

#### Load Life

3250.....1,000 hours 1.0 watt @ 85°C

(2% ΔTR; 500 ohms ENR)

RT22.....1,000 hours 0.75 watt @ 85°C

(2% ΔTR; 2% + resolution ΔVR)

RTR22.....10,000 hours 0.75 watt @ 85°C

(3% ΔTR; 2% + resolution ΔTR)

Rotational Life.....200 cycles

3250.....(2% ΔTR; 500 ohms ENR)

RT22/RTR22.....(2% ΔTR)

### Physical Characteristics

Torque.....5.0 oz.-in. max.

Mechanical Stops.....Wiper idles

#### Terminals

3250.....Solderable printed circuit pins

Flexible leads (7 strands of 30 AWG)

RT22/RTR22.....MIL-STD-202; Method 208

Weight.....0.06 oz.

#### Machine Screw Mounting

Torque.....12 oz.-in. max.

#### Marking

3250.....Manufacturer's trademark,

resistance code, terminal numbers,

date code, manufacturer's model

number and style

RT22/RTR22.....Mil-spec part number

Wiper.....Set at CW end

Flammability.....U.L. 94V-0


#### Standard Packaging

P&W Styles.....25 pcs. per tube


L Style.....25 pcs. per bag

Adjustment Tool.....H-90


### 3250P/RT22/RTR22 Common Dimensions (Pin Styles)

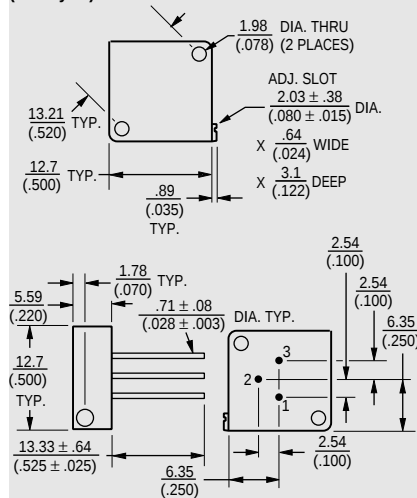

### 3250W/RT22/RTR22

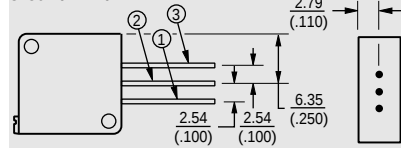


### 3250W-66/RT22X/RTR22X

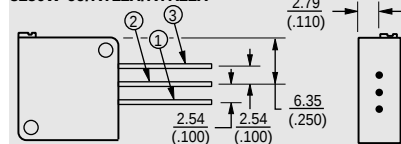

### "L" Flex Lead Type


RT22 has mounting slots

RTR22 has mounting holes

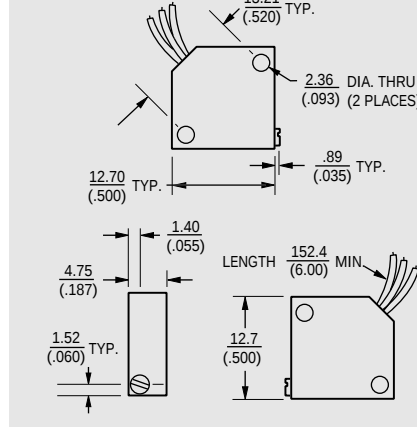

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)



### How To Order

**3250 L - 1 - 103 M**

Model \_\_\_\_\_

Style \_\_\_\_\_

Standard or Modified \_\_\_\_\_

Product Indicator \_\_\_\_\_

-1 = Standard Product

Resistance Code \_\_\_\_\_

Optional Suffix Letter \_\_\_\_\_

M = Panel Mount

(Factory Installed)

See page 80 for RT22/RTR22 ordering information.

Consult factory for other available options.

### Standard Resistance Table

| Resistance (Ohms) | Nominal Resistance Code | Resolution (Percent) |
|-------------------|-------------------------|----------------------|
| 10                | 100                     | 1.30                 |
| 20                | 200                     | 1.00                 |
| 50                | 500                     | 0.80                 |
| <b>100</b>        | <b>101</b>              | <b>0.90</b>          |
| <b>200</b>        | <b>201</b>              | <b>0.70</b>          |
| <b>500</b>        | <b>501</b>              | <b>0.60</b>          |
| <b>1,000</b>      | <b>102</b>              | <b>0.40</b>          |
| <b>2,000</b>      | <b>202</b>              | <b>0.30</b>          |
| <b>5,000</b>      | <b>502</b>              | <b>0.25</b>          |
| <b>10,000</b>     | <b>103</b>              | <b>0.19</b>          |
| <b>20,000</b>     | <b>203</b>              | <b>0.16</b>          |
| 25,000            | 253                     | 0.14                 |
| 50,000            | 503                     | 0.13                 |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

查询"3059Y-1-101"供应商

**BOURNS®**

## Features

- Multiturn / Cermet / Sealed
- Listed on the QPL for style RJ22 per MIL-R-22097
- Panel mount option available (see page 73 for details)

## 3252/RJ22 - 1/2" Square Trimming Potentiometer

### Electrical Characteristics

|                              |                                                   |
|------------------------------|---------------------------------------------------|
| Standard Resistance Range    |                                                   |
| 3252                         | 10 to 2 megohms                                   |
| RJ22                         | 10 to 1 megohm<br>(see standard resistance table) |
| Resistance Tolerance         | ±10% std.<br>(tighter tolerance available)        |
| Absolute Minimum Resistance  |                                                   |
| 3252                         | 1% or 2 ohms max.<br>(whichever is greater)       |
| RJ22                         | 1 ohm max.                                        |
| Contact Resistance Variation |                                                   |
| 3252                         | 1% or 2 ohms max.<br>(whichever is greater)       |
| RJ22                         | 2% or 2 ohms max.<br>(whichever is greater)       |
| Adjustability                |                                                   |
| Voltage                      | ±0.01%                                            |
| Resistance                   | ±0.05%                                            |
| Resolution                   | Infinite                                          |
| Insulation Resistance        | 500 vdc.<br>1,000 megohms min.                    |
| Dielectric Strength          |                                                   |
| Sea Level                    | 1,000 vac                                         |
| 80,000 Feet                  | 400 vac                                           |
| Effective Travel             | 25 turns nom.                                     |

### Environmental Characteristics

|                                      |                                                                                      |
|--------------------------------------|--------------------------------------------------------------------------------------|
| Power Rating @ 85°C (400 volts max.) |                                                                                      |
| 3252                                 | 0.75 watt                                                                            |
| RJ22                                 | 0.50 watt                                                                            |
| Power Rating @ 150°C                 | 0 watt                                                                               |
| Temperature Range                    | -65°C to +150°C                                                                      |
| Temperature Coefficient              | ±100ppm/°C                                                                           |
| Seal Test                            | 85°C Fluorinert*<br>(pin styles only)                                                |
| Humidity                             |                                                                                      |
| 3252                                 | MIL-STD-202 Method 103;<br>96 hours (1% ΔTR; 100 Megohms IR)                         |
| RJ22                                 | MIL-STD-202 Method 106<br>(1% ΔTR; 10 Megohms IR)                                    |
| Vibration                            |                                                                                      |
| 3252                                 | 30G (1% ΔTR; 1% ΔVR)                                                                 |
| RJ22                                 | 20G (1% ΔTR; 1% ΔVR)                                                                 |
| Shock                                | 100G (1% ΔTR; 1% ΔVR)                                                                |
| Load Life                            |                                                                                      |
| 3252                                 | 1,000 hours 0.75 watt @ 85°C<br>(3% ΔTR; 3% or 3 ohms,<br>whichever is greater, CRV) |
| RJ22                                 | 1,000 hours 0.5 watt @ 85°C<br>(2% ΔTR; 1% ΔVR)                                      |
| Rotational Life                      | 200 cycles                                                                           |
| 3252                                 | (2% ΔTR; 3% or 3 ohms,<br>whichever is greater, CRV)                                 |
| RJ22                                 | 2% ΔTR                                                                               |

### Physical Characteristics

|                  |                                 |
|------------------|---------------------------------|
| Torque           | 5.0 oz-in. max.                 |
| Mechanical Stops | Wiper idles                     |
| Terminals        |                                 |
| 3252             | Solderable printed circuit pins |
| RJ22             | MIL-STD-202; Method 208         |
| Flexible leads   | (7 strands of 30 AWG)           |
| Weight           | 0.065 oz.                       |
| Wiper            | Set at CW end                   |
| Flammability     | U.L. 94V-0                      |

### Machine Screw Mounting


|                    |                                                                                                                      |
|--------------------|----------------------------------------------------------------------------------------------------------------------|
| Torque             | 12 oz-in. max.                                                                                                       |
| Marking            |                                                                                                                      |
| 3252               | Manufacturer's trademark,<br>resistance code, wiring diagram,<br>date code, manufacturer's model<br>number and style |
| RJ22               | Mil-spec part number                                                                                                 |
| Standard Packaging |                                                                                                                      |
| X, P&W Styles      | 25 pcs. per tube                                                                                                     |
| L Style            | 25 pcs. per bag                                                                                                      |
| Adjustment Tool    | H-90                                                                                                                 |

### How To Order


|                        |                                     |
|------------------------|-------------------------------------|
| Model                  | 3252 L - 1 - 103 M                  |
| Style                  |                                     |
| Standard or Modified   |                                     |
| Product Indicator      | -1 = Standard Product               |
| Resistance Code        |                                     |
| Optional Suffix Letter | M = Panel Mount (Factory Installed) |

See page 81 for RJ22 ordering information.  
Consult factory for other available options.



### 3252P/RJ22 Common Dimensions (Pin Styles)

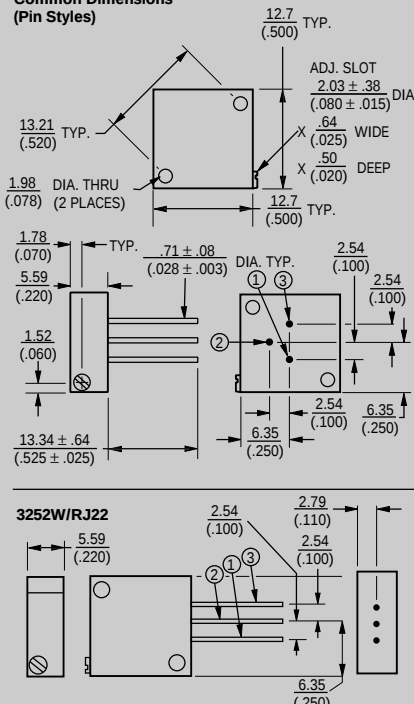

### 3252L/RJ22

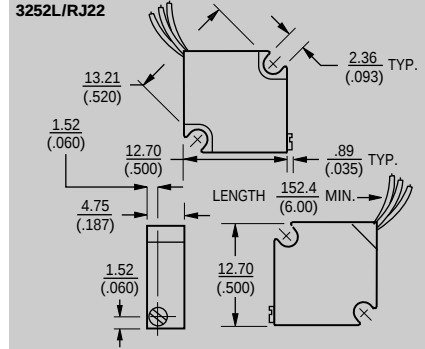

### 3252X/RJ22

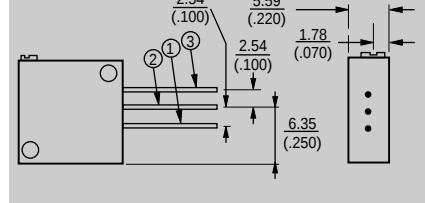

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

\*\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

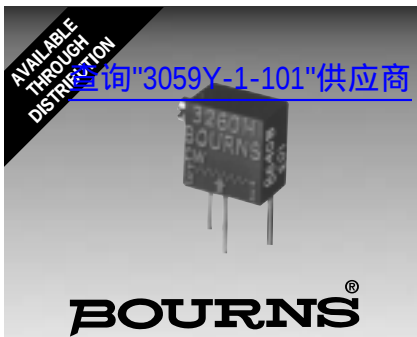

## Features

- Multiturn / Wirewound / Industrial / Sealed
- Listed on the QPL for style RT26 per MIL-R-27208

## 3260/RT26 - 1/4" Square Trimming Potentiometer

### Electrical Characteristics

|                             |                                 |
|-----------------------------|---------------------------------|
| Standard Resistance Range   |                                 |
| 3260                        | 10 to 25K ohms                  |
| RT26                        | 10 to 5K ohms                   |
|                             | (see standard resistance table) |
| Resistance Tolerance        | ±5% std.                        |
|                             | (tighter tolerance available)   |
| Absolute Minimum Resistance |                                 |
| 3260                        | 0.1% or 1 ohm max.              |
|                             | (whichever is greater)          |
| RT26                        | 0.25% or 1 ohm max.             |
|                             | (whichever is greater)          |
| Noise                       | 100 ohms ENR max.               |
| Resolution                  | See resistance table            |
| Insulation Resistance       | 500 vdc.                        |
|                             | 1,000 megohms min.              |
| Dielectric Strength         |                                 |
| Sea Level                   | 600 vac                         |
| 80,000 Feet                 | 250 vac                         |
| Adjustment Angle            | 11 turns nom.                   |

### Environmental Characteristics

|                         |                                    |
|-------------------------|------------------------------------|
| Power Rating            |                                    |
| 85°C                    | 0.25 watt                          |
| 150°C                   | 0 watt                             |
| Temperature Range       |                                    |
| 3260                    | -65°C to +150°C                    |
| RT26                    | -55°C to +150°C                    |
| Temperature Coefficient |                                    |
| 3260                    | ±70ppm/°C                          |
| RT26                    | ±50ppm/°C                          |
| Seal Test               | 85°C Fluorinert*                   |
| Humidity                | MIL-STD-202 Method 106             |
| 3260                    | (2% ΔTR, 100 Megohms IR)           |
| RT26                    | (1% ΔTR, 10 Megohms IR)            |
| Vibration               |                                    |
| 3260                    | 30G (1% ΔTR; 1% + resolution ΔVR)  |
| RT26                    | 20G (1% ΔTR; 1% + resolution ΔVR)  |
| Shock                   | 100G (1% ΔTR; 1% + resolution ΔVR) |
| Load Life               | 1,000 hours 0.25 watt @ 85°C       |
| 3260                    | (2% ΔTR; 500 ohms ENR)             |
| RT26                    | (2% ΔTR; 2% + resolution ΔVR)      |
| Rotational Life         | 200 cycles                         |
| 3260                    | (2% ΔTR; 500 ohms ENR)             |
| RT26                    | (2% ΔTR)                           |


### Physical Characteristics

|                    |                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------|
| Torque             | 3.0 oz-in. max.                                                                                             |
| Mechanical Stops   | Wiper idles                                                                                                 |
| Terminals          |                                                                                                             |
| 3260               | Solderable printed circuit pins                                                                             |
| RT26               | MIL-STD-202; Method 208                                                                                     |
| Weight             | 0.015 oz.                                                                                                   |
| Marking            |                                                                                                             |
| 3260               | Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style |
| RT26               | Mil-spec part number                                                                                        |
| Wiper              | Set at CW end                                                                                               |
| Flammability       | UL 94V-0                                                                                                    |
| Standard Packaging | 50 pcs. per tube                                                                                            |
| Adjustment Tool    | H-90                                                                                                        |



### How To Order

|                                                                                         |                  |
|-----------------------------------------------------------------------------------------|------------------|
| Model                                                                                   | 3260 H - 1 - 502 |
| Style                                                                                   |                  |
| Standard or Modified Product Indicator                                                  |                  |
| -1 = Standard Product                                                                   |                  |
| Resistance Code                                                                         |                  |
| See page 81 for RT26 ordering information. Consult factory for other available options. |                  |

### 3260H/RT26 "X" Style Common Dimensions

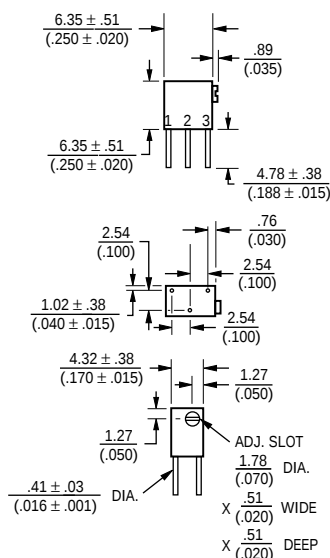

### 3260W/RT26



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code | Nominal Resolution (Percent) |
|-------------------|-----------------|------------------------------|
| 10                | 100             | 1.90                         |
| 20                | 200             | 1.50                         |
| 50                | 500             | 1.23                         |
| 100               | 101             | 1.00                         |
| 200               | 201             | 0.94                         |
| 500               | 501             | 0.58                         |
| <b>1,000</b>      | <b>102</b>      | <b>0.50</b>                  |
| <b>2,000</b>      | <b>202</b>      | <b>0.45</b>                  |
| <b>5,000</b>      | <b>502</b>      | <b>0.34</b>                  |
| <b>10,000</b>     | <b>103</b>      | <b>0.29</b>                  |
| <b>20,000</b>     | <b>203</b>      | <b>0.28</b>                  |
| 25,000            | 253             | 0.23                         |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

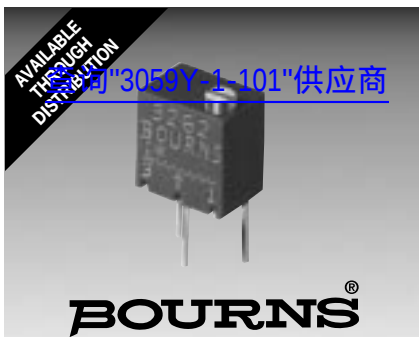

## Features

- Multiturn / Cermet / Industrial / Sealed
- Listed on the QPL for style RJ26 per MIL-R-22097 and RJR26 per High-Rel MIL-R-39035
- Patent #4427966 drive mechanism

## 3262/RJ26/RJR26 - 1/4" Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance.....1% or  
2 ohms max. (whichever is greater)  
Contact Resistance Variation .....3.0% or  
3 ohms max. (whichever is greater)  
Adjustability  
Voltage.....±0.02%  
Resistance.....±0.05%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level.....600 vac  
80,000 Feet.....250 vac  
Effective Travel.....12 turns nom.

### Environmental Characteristics

Power Rating  
(3262 300 volts max.;  
RJ26/RJR26 200 volts max.)  
85°C .....0.25 watt  
150°C .....0 watt  
Temperature Range.....-65°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity  
3262 .....MIL-STD-202 Method 103  
96 hours (2% ΔTR, 100 Megohms IR)  
RJ26.....MIL-STD-202 Method 106  
96 hours (1% ΔTR, 10 Megohms IR)  
RJ26.....MIL-STD-202 Method 106  
96 hours (1% ΔTR, 100 Megohms IR)  
Vibration  
3262 .....30G (1% ΔTR; 1% ΔVR)  
RJ26/RJR26.....20G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life  
3262 .....1,000 hours 0.25 watt @ 85°C  
(3% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)  
RJ26 .....1,000 hours 0.25 watt @ 85°C  
(2% ΔTR; 1% ΔVR)  
RJ26.....10,000 hours 0.25 watt @ 85°C  
(3% ΔTR)  
Rotational Life .....200 cycles  
3262 .....(2% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)  
RJ26/RJR26 .....(2% ΔTR)

### Physical Characteristics

Torque.....3.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals  
3262 .....Solderable pins  
RJ26/RJR26...MIL-STD-202; Method 208

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

Specifications are subject to change without notice.

### Physical Characteristics (cont.)

Weight .....0.015 oz.  
Marking  
3262 .....Manufacturer's trademark,  
resistance code, wiring diagram,  
date code, manufacturer's model  
number and style  
RJ26/RJR26 .....Mil-spec part number  
Wiper.....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### How To Order

**3262 P - 1 - 103**  
Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified  
Product Indicator \_\_\_\_\_  
-1 = Standard Product  
Resistance Code \_\_\_\_\_


See page 82 for RJ26/RJR26 ordering  
information.

Consult factory for other available options.

### 3262W/RJ26/RJR26 Common Dimensions


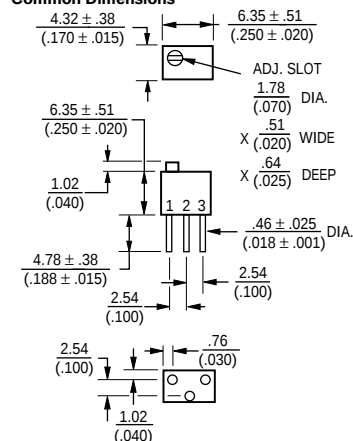


### 3262X/RJ26/RJR26



\*Common dimensions

### 3262P/RJ26/RJR26



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC  
(INCHES)

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

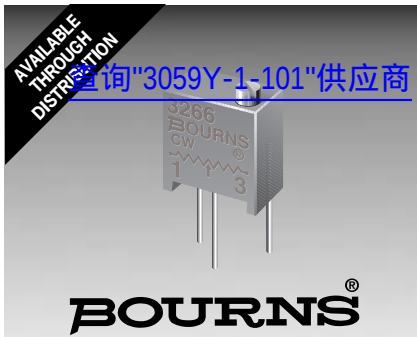

## Features

- Multiturn / Cermet / Industrial / Sealed
- Standoffs allow thorough PC board washing
- Tape and reel packaging available (see page 70 for details)
- Patent #4427966 drive mechanism

## 3266 - 1/4" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
Absolute Minimum Resistance  
.....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
.....3.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.02%  
Resistance .....±0.05%  
Resolution .....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....600 vac  
80,000 Feet .....250 vac  
Effective Travel .....12 turns nom.

### Environmental Characteristics

Power Rating (300 volts max.)  
70°C .....0.25 watt  
150°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity .....MIL-STD-202 Method 103  
96 hours (2% ΔTR, 10 Megohms IR)  
Vibration .....30G (1% ΔTR; 1% ΔVR)  
Shock .....100G (1% ΔTR; 1% ΔVR)  
Load Life .....1,000 hours 0.25 watt 70°C  
(3% ΔTR; 3% CRV)  
Rotational Life .....200 cycles  
(4% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)


### Physical Characteristics

Torque .....3.0 oz-in. max.  
Mechanical Stops .....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.015 oz.  
Marking .....Manufacturer's  
trademark, resistance code,  
wiring diagram, date code,  
manufacturer's model  
number and style  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

### 3266W


#### Common Dimensions

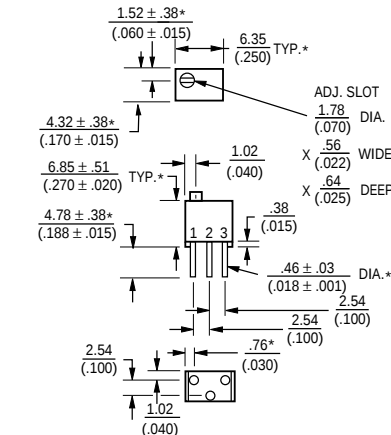

### 3266P



### 3266X

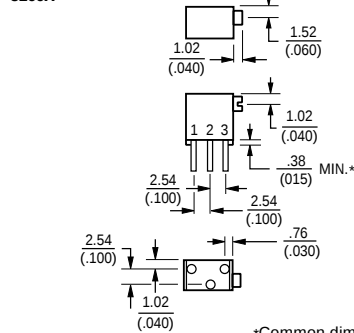

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC  
(INCHES)

### How to Order



**3266 W - 1 - 103**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified  
Product Indicator  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

### 3266Y

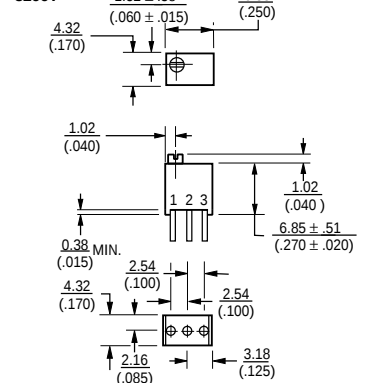

### 3266Z

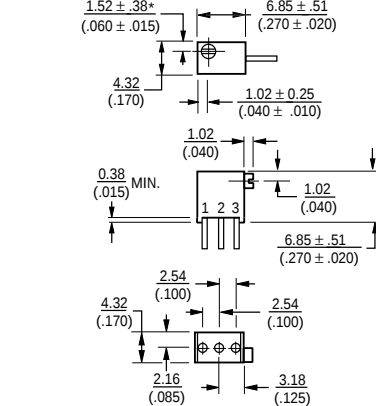

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |


Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

Specifications are subject to change without notice.



查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- Stable, infinite resolution cermet element
- Vertical and horizontal adjust styles
- Optional packaging on embossed tape
- Compatible with surface mount manufacturing processes

## 3269 - 1/4" Square SMD Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(closer tolerance available)  
Absolute Minimum Resistance .....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation .....3.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.02%  
Resistance .....±0.05%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....600 vac  
80,000 Feet.....250 vac  
Effective Travel.....12 turns nom.

### Environmental Characteristics


Maximum Exposure (Temp/Time) ..... +245°C/10 sec.  
Power Rating (300 volts max.)  
85°C .....0.25 watt  
150°C .....0 watt  
Temperature Range .....-65°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 106  
(2% ΔTR; IR 100 Megohms)  
Vibration.....30G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life...1,000 hours 0.25 watt @ 85°C  
(3% ΔTR; 3% or 3 ohms  
whichever is greater, CRV)  
Rotational Life .....200 cycles  
(2% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)

### Physical Characteristics


Torque .....3.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.015 oz.  
Marking .....Manufacturer's  
trademark, resistance code,  
wiring diagram, date code,  
manufacturer's model  
number and style  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90

#### 3269P


##### Common Dimensions

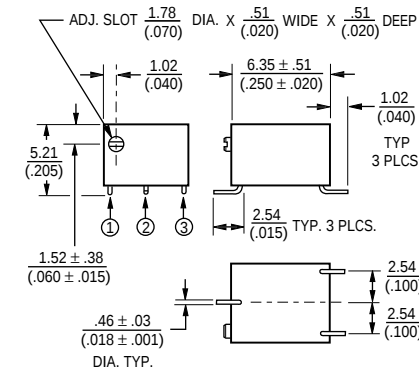


#### 3269W

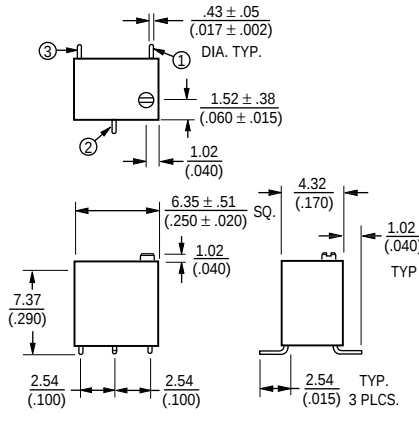



#### 3269X

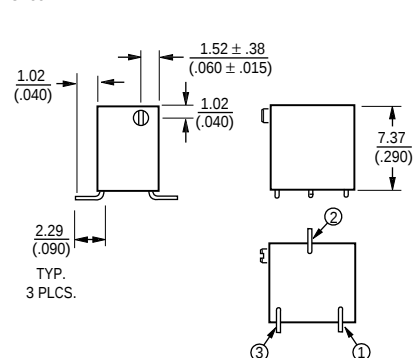

#### RECOMMENDED PCB LAYOUT - "P"



#### RECOMMENDED PCB LAYOUT - "W" & "X"



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

### How To Order

**3269 X - 1 - 103 G**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard Product \_\_\_\_\_  
Resistance Code \_\_\_\_\_  
Optional Suffix Letter \_\_\_\_\_  
G= Embossed Tape  
"P" Style - 750 pcs./13" reel  
"W, X" Style - 500 pcs./13" reel

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

## 3269 - Packaging Specifications

**BOURNS®**

### Packaging Specifications


(P Style)

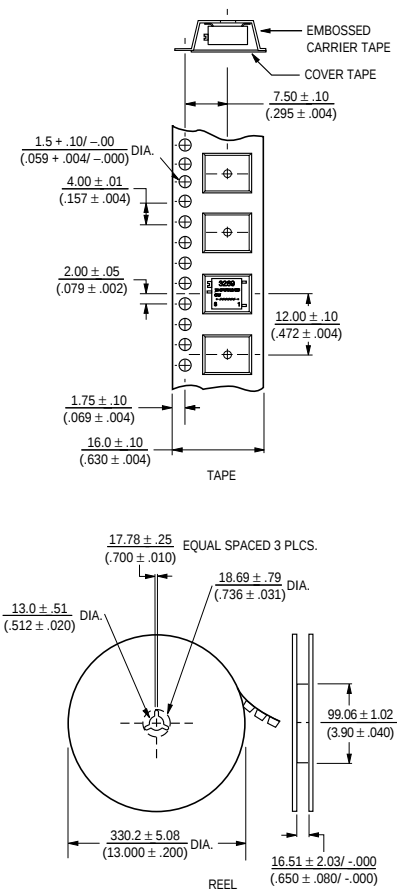

Units packaged 750 pieces per reel.

### Packaging Specifications

(W & X Styles)

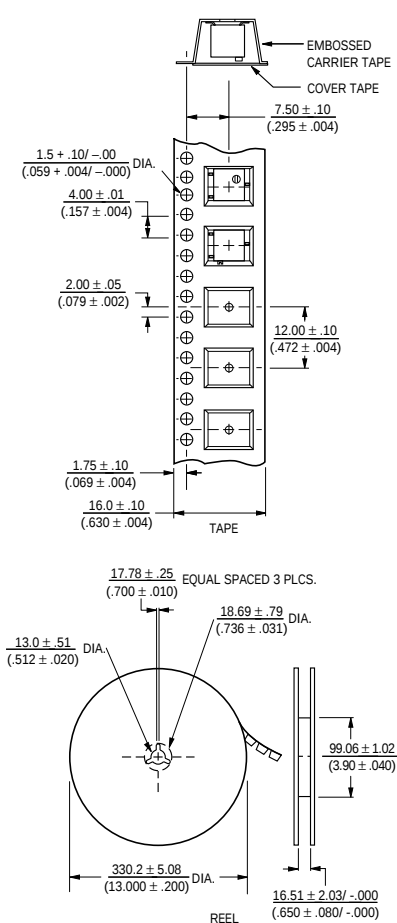

Units packaged 500 pieces per reel.



查询"3059Y-1-101"供应商

BOURNS®

## Features

- Multiturn / Cermet / Industrial / Sealed
- Optional panel mount available (see page 73 for details)
- Patent #4427966 drive mechanism
- Thin body profile

## 3292 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance  
.....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
3292.....1.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage.....±0.01%  
Resistance.....±0.05%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....1,000 vac  
80,000 Feet.....400 vac  
Effective Travel.....25 turns nom.

### Environmental Characteristics

Power Rating (400 volts max.)  
85°C .....0.5 watt  
150°C .....0 watt  
Temperature Range.....-65°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
(pin styles only)  
Humidity.....MIL-STD-202 Method 103  
96 hours (1% ΔTR, 100 Megohms IR)  
Vibration.....30G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life ..1,000 hours 0.5 watt @ 85°C  
(2% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)  
Rotational Life .....200 cycles  
(2% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)


### Physical Characteristics

Torque .....5.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals  
.....Solderable printed circuit pins  
Weight .....0.025 oz.  
Machine Screw Mounting  
Torque .....12 oz-in. max.  
Marking  
.....Manufacturer's trademark,  
resistance code, wiring diagram, date  
code, manufacturer's model number  
and style  
Wiper .....Positioned at 50% nominal  
Flammability.....U.L. 94V-0  
Standard Packaging  
P,W & X Styles.....50 pcs. per tube  
L Style .....50 pcs. per bag  
Adjustment Tool .....H-90


Specifications are subject to change without notice.

#### 3292L


##### Common Dimensions

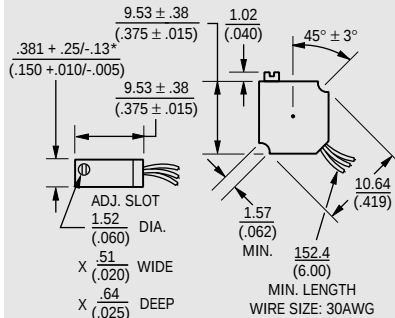

#### 3292P

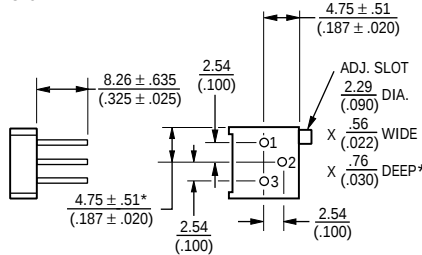

#### 3292W

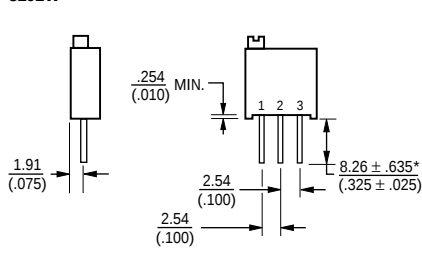

\*Common dimensions

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)



### How To Order

3292 W - 1 - 103 M  
Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified  
Product Indicator  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Optional Suffix Letter \_\_\_\_\_  
M = Panel Mount Model 3292L, W & X  
(Factory Installed)

Consult factory for other available options.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

#### 3292X

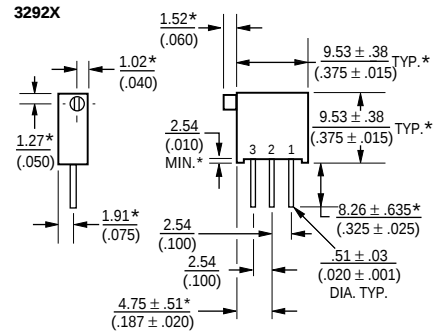


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

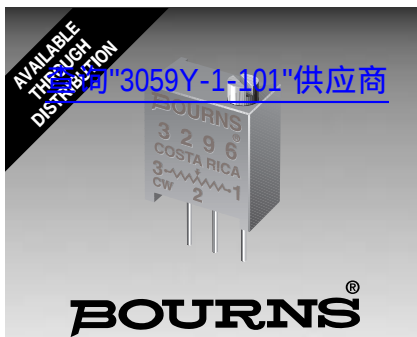

## Features

- Multiturn / Cermet / Industrial / Sealed
- 5 terminal styles
- Tape and reel packaging available
- Chevron seal design
- Listed on the QPL for style RJ24 per MIL-R-22097 and RJR24 per High-Rel Mil-R-39035

## 3296 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 5 megohms  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation .....1.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.01%  
Resistance .....±0.05%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet.....350 vac  
Effective Travel.....25 turns nom.


### Environmental Characteristics

Power Rating (300 volts max.)  
70°C .....0.5 watt  
125°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 103  
96 hours  
(2% ΔTR, 10 Megohms IR)  
Vibration.....20G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life .....1,000 hours 0.5 watt @ 70°C  
(3% ΔTR; 3% or 3 ohms, whichever is greater, CRV)  
Rotational Life .....200 cycles  
(4% ΔTR; 3% or 3 ohms, whichever is greater, CRV)


### Physical Characteristics

Torque .....3.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### Common Dimensions

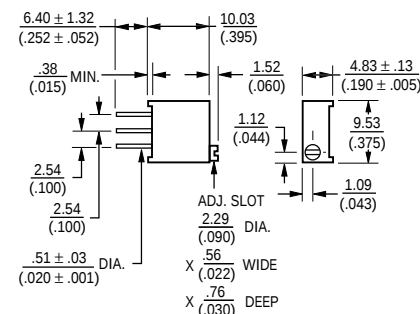


### 3296P

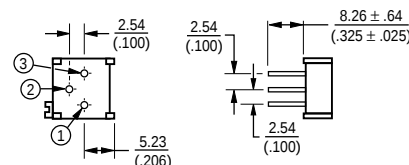

### 3296W




### 3296X





### How To Order

**3296 W - 1 - 103**  
Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

### 3296Y (Commercial Only)



### 3296Z (Commercial Only)




TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

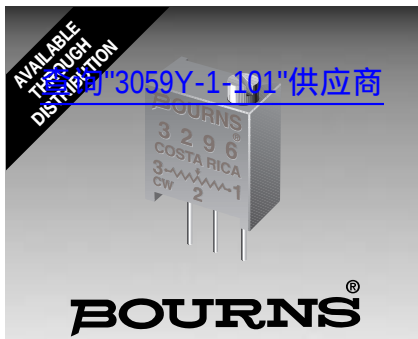

## Features

- Low TCR
- Multiturn / Cermet / Industrial / Sealed
- 3 terminal styles
- Chevron seal design

## Applications

- Rheostat applications with wiper currents less than 25 microamps
- Process control instrumentation
- Power supplies

# 3296-LTC - 3/8" Square Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range .....2K to 25K ohms  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation .....1.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.01%  
Resistance .....±0.05%  
Resolution .....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet .....350 vac  
Effective Travel .....25 turns nom.


## Environmental Characteristics

Power Rating (300 volts max.)  
70°C .....0.5 watt  
125°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient  
End to End .....±20ppm/°C  
Through the Wiper .....±50ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity .....MIL-STD-202 Method 103  
96 hours  
(2% ΔTR, 10 Megohms IR)  
Vibration .....20G (1% ΔTR; 1% ΔVR)  
Shock .....100G (1% ΔTR; 1% ΔVR)  
Load Life .....1,000 hours 0.5 watt @ 70°C  
(3% ΔTR; 3% or 3 ohms, whichever is greater, CRV)  
Rotational Life .....200 cycles  
(4% ΔTR; 3% or 3 ohms, whichever is greater, CRV)


## Physical Characteristics

Torque .....3.0 oz-in. max.  
Mechanical Stops .....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


## Common Dimensions

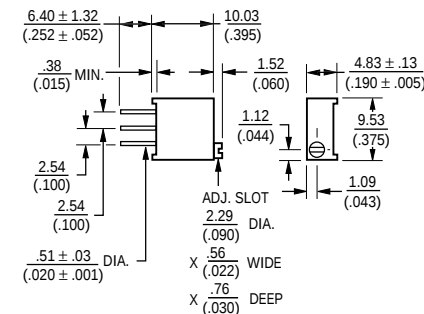



## 3296P

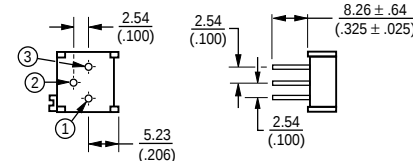

## 3296W



## 3296X



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |


Popular values listed in boldface. Special resistances available.

## How To Order

Model **3296 W - LTC - 103**  
Style \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

NOTE: TCR through the wiper applies when 40% or more of the resistance element is in the circuit.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

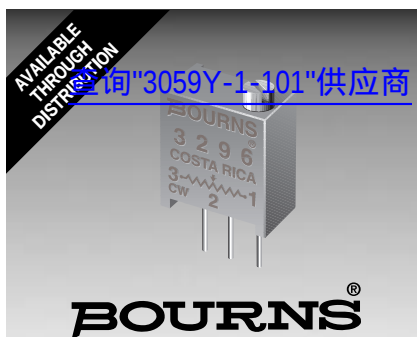

## Features

- Multiturn / Cermet / Industrial / Sealed
- Standoffs
- Patent #4427966 drive mechanism
- Listed on the QPL for style RJ24 per MIL-R-22097 and RJR24 per High-Rel Mil-R-39035

## RJ24/RJR24 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
Absolute Minimum Resistance  
.....1 ohm max.  
Contact Resistance Variation  
.....3.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.01%  
Resistance .....±0.05%  
Resolution .....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....1,000 vac  
80,000 Feet .....400 vac  
Effective Travel .....25 turns nom.


### Environmental Characteristics

Power Rating (300 volts max.)  
85°C .....0.5 watt  
150°C .....0 watt  
Temperature Range  
.....-55°C to +150°C  
Temperature Coefficient  
.....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity .....MIL-STD-202 Method 106  
RJ24 .....96 hours  
(1% ΔTR, 10 Megohms IR)  
RJR24 .....96 hours  
(1% ΔTR, 100 Megohms IR)  
Vibration .....20G (1% ΔTR; 1% ΔVR)  
Shock .....100G (1% ΔTR; 1% ΔVR)  
Load Life  
RJ24 .....1,000 hours 0.5 watt @ 85°C  
(2% ΔTR; 10% ΔVR)  
RJR24 .....10,000 hours 0.5 watt @ 85°C  
(3% ΔTR)  
Rotational Life .....200 cycles (2% ΔTR)


### Physical Characteristics

Torque .....5.0 oz-in. max.  
Mechanical Stops .....Wiper idles  
Terminals .....MIL-STD 202, Method 208  
Weight .....0.025 oz.  
Marking .....Mil-spec part number,  
date code  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### Common Dimensions

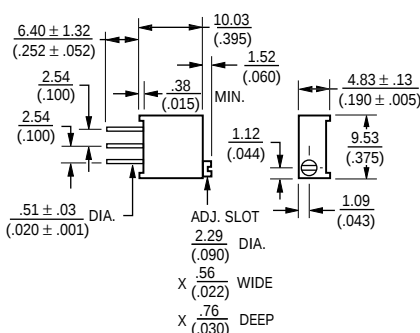



### RJ24/RJR24FP

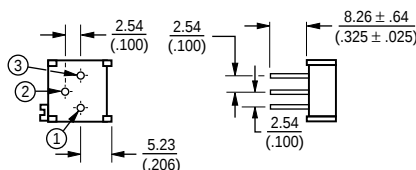

### RJ24/RJR24FW



### RJ24/RJR24FX



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| <b>10</b>         | <b>100</b>      |
| <b>20</b>         | <b>200</b>      |
| <b>50</b>         | <b>500</b>      |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| <b>200,000</b>    | <b>204</b>      |
| <b>250,000</b>    | <b>254</b>      |
| <b>500,000</b>    | <b>504</b>      |
| <b>1,000,000</b>  | <b>105</b>      |

Popular values listed in boldface. Special resistances available.

### How To Order

See page 81 for Model RJ24, and page 82 for Model RJR24.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

查询"3059Y-1-101"供应商

**BOURNS®**

## Features

- High Performance Series 3/8" Square / Multiturn / Cermet / Industrial / Sealed
- Thin body profile
- Sealed to withstand board washing processes
- Patent #4427966, #4732802, #4824694
- Low current applications <50uA

## 3296-LC2 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....500 ohms to 100K ohms  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
Absolute Minimum Resistance  
.....2 ohms or 1% max.  
(whichever is greater)  
Contact Resistance Variation  
.....0.5% max.  
Contact Resistance (D.C. mode)  
.....0.3% max.  
D.C. Offset .....0.5% max.  
Adjustability  
Voltage .....±0.1%  
Resistance .....±0.2%  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 feet .....350 vac  
Adjustment Angle, Electrical  
.....25 ±5 turns


### Environmental Characteristics

Power Rating (400 volts max.)  
85°C .....0.5 watt  
125°C .....0 watt  
Temperature Range  
.....-55°C to +125°C  
Temperature Coefficient  
.....±100ppm/°C  
Humidity .....80-90%, RH, 10 cycles  
2% max. TRS, IR 10 megohms  
0.2% max. contact resistance shift  
Seal Test .....85° C Flourinert\*  
Vibration .....20G - 0.5% VRS  
0.2% contact resistance shift  
Shock .....100G - 0.5% VRS  
0.2% contact resistance shift  
Load Life @ 85°C Rated Power  
.....1,000 hours 3% TRS,  
0.2% contact resistance  
shift - 0.5% CRV  
Rotational Life .....200 cycles, 4% TRS  
0.2% contact resistance shift  
Thermal Shock .....5 cycles  
2% TRS, 0.5% VRS  
0.2% contact resistance shift


### Physical Characteristics

Torque .....3.0 oz-in. max.  
Mechanical Stops .....Wiper idles  
Terminals .....Solderable PC pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's  
trademark, resistance code  
and date code  
Wiper .....Set at CW end  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### Common Dimensions

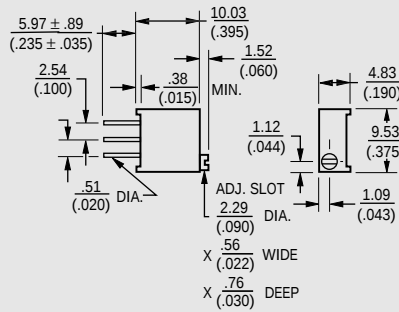



#### 3296P



#### 3296W



#### 3296X



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |


SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

### How To Order

**3296 W - LC2 - 103**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- 3/8" Square / Multiturn / Cermet Industrial / Sealed
- Designed for operational amplifier offset voltage adjustment applications
- Reduces power supply drift errors
- Unique center tapped trimming potentiometer

- Vertical and horizontal adjust types available
- Patent #4427966 drive mechanism

## 3296-OT1 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
(Pin 1 to Pin 3)

.....100 ohms to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±20% std.  
Absolute Minimum Resistance  
.....2 ohms max.  
Voltage Output Variation.....+0.25%  
Adjustability (VR) .....±0.025%  
Insulation Resistance .....500 vdc.  
.....1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet.....350 vac  
Effective Electrical Travel, Nom.  
.....25 turns  
Center Tap Resistance .....2 ohms max.  
Center Tap Electrical Center.....±5%  
Center Tap Dead Band .....0.5 turn

### Environmental Characteristics


Power Rating  
70°C .....0.5 watt  
125°C .....0 watt  
Temperature Range  
.....-55°C to +125°C  
Temperature Stability (ΔVR)  
.....±0.5% max.  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 103  
96 hours.....10 megohms min.  
Vibration, 20G.....±1% ΔTR  
Shock, 100G.....±1% ΔTR  
Load Life, 1,000 Hours.....±3% ΔTR  
Rotational Life, 200 cycles  
.....±4% ΔTR

### Physical Characteristics


Torque .....3.0 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals.....Solderable pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's  
trademark, resistance code,  
wiring diagram, date code,  
manufacturer's model  
number and style  
Flammability .....U.L. 94V-0  
Standard Packaging  
.....50 pcs. per tube/tray  
Adjustment Tool .....H-90

Also see Model 3386-OT1, page 62.



### Common Dimensions

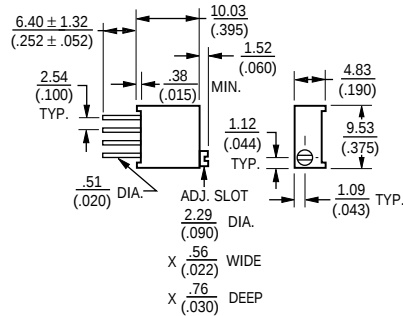

### 3296W-OT1



### 3296X-OT1



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{(\text{INCHES})}$


### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

### Suggested Offset Voltage Adjustment Circuit

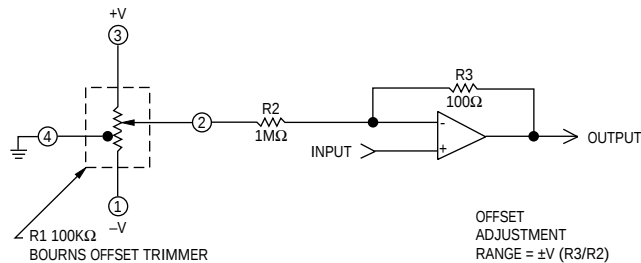

OFFSET  
ADJUSTMENT  
RANGE =  $\pm V (R3/R2)$

### How To Order


**3296 X - OT1 - 103**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Catalog Product \_\_\_\_\_  
Resistance Code \_\_\_\_\_

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.



查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- Single-Turn Cermet / Open Frame
- Recommended for reflow processing
- Rotor design compatible with automatic adjustment equipment
- Supplied in 8mm embossed tape, compatible with automatic assembly equipment

- 2mm size meets EIA/EIAJ standard trimmer footprint

## 3302 - 2mm SMD Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....200 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±25% std.  
Absolute Minimum Resistance  
≤1K .....20 ohms max.  
>1K .....5% max.  
Contact Resistance Variation  
.....5% max.  
Resolution .....Infinite  
Adjustment Angle .....260° ±20°

### Environmental Characteristics

Power Rating (50 VDC max.)  
70°C .....0.15 watt  
Temperature Range  
.....-40°C to +85°C  
Temperature Coefficient  
.....±250ppm/°C  
Humidity .....95%RH  
500 hours  
TRS max. ....±5%  
Load Life  
.....@ 70°C rated power 500 hours  
TRS ±5%  
Rotational Cycling .....10 turns  
TRS ±15%

### Physical Characteristics

Torque .....10-150g-cm max.  
Mechanical Angle .....Continuous  
Marking .....Part marking code  
Standard Packaging  
.....2000 pcs./7" reel  
Adjustment Tool .....H-91


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

### How To Order


**3302 X - 2 - 103 E**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Orientation of Parts  
In Tape:  
Style W: Terminals Toward  
Sprocket Holes  
Standard or Modified  
Product Indicator  
-1 = Single Slot  
-2 = Cross Slot Rotor (Std. Product)  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator \_\_\_\_\_  
Consult factory for other available options.


#### 3302W, X-1 2mm Open Frame for Reflow Soldering

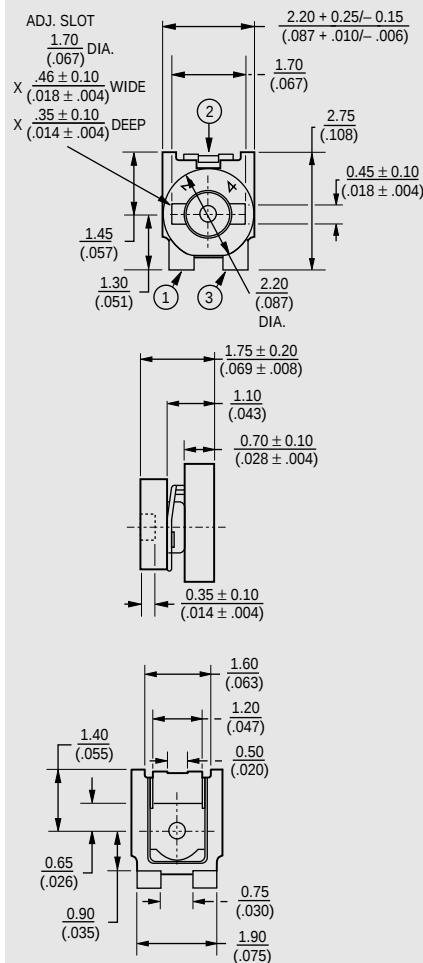


#### SUGGESTED PWB LAYOUT

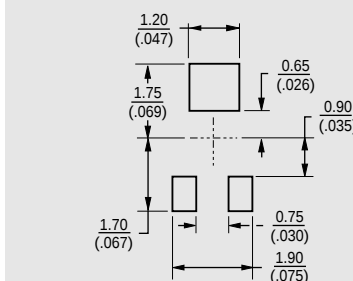

#### 3302W, X-2 3 Terminals for Automatic Trimming Adjustment

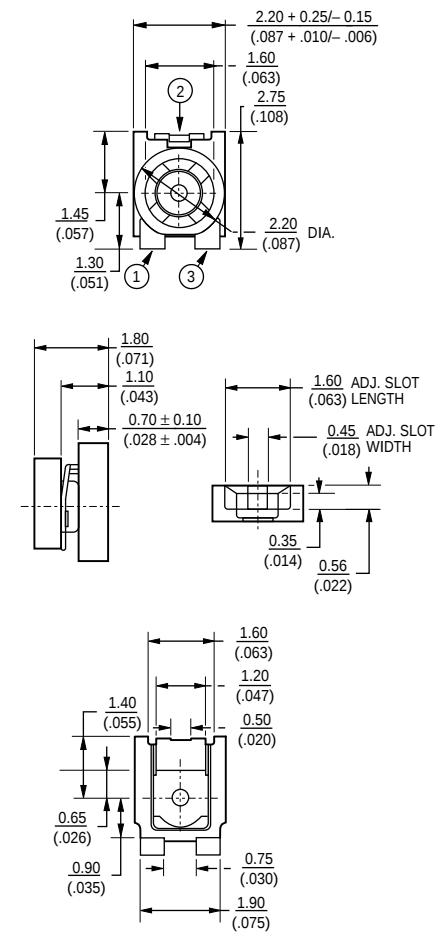




#### SUGGESTED PWB LAYOUT

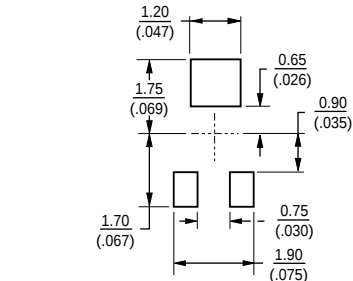

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

Specifications are subject to change without notice.

# 3302 - Packaging Specifications

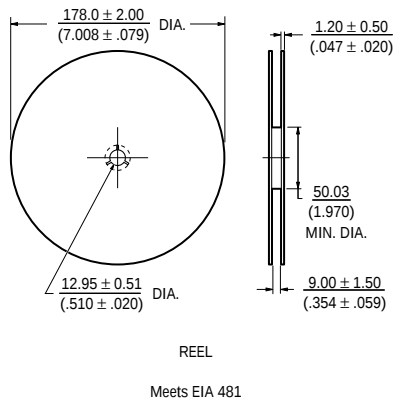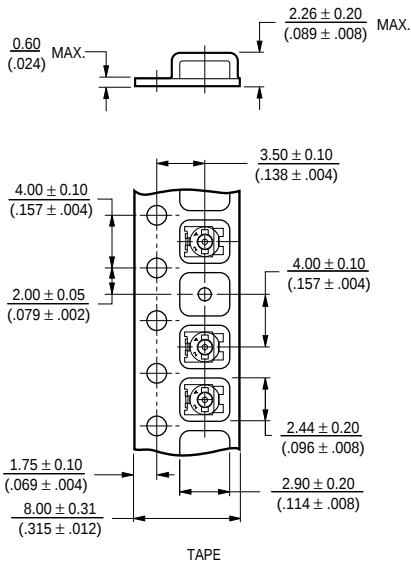

TOLERANCES:  $\pm 0.25$  (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE:  $\frac{\text{METRIC}}{(\text{INCHES})}$

Standard Resistance Table

| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 200               | 22                | 201             |
| 500               | 52                | 501             |
| <b>1,000</b>      | <b>13</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>14</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| 50,000            | 54                | 503             |
| 100,000           | 15                | 104             |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | 16                | 105             |

Popular values listed in boldface.

查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- Recommended for reflow processing
- Rotor design compatible with pick and place and automatic adjustment equipment
- Supplied in 8mm embossed tape, compatible with automatic assembly equipment

- Rear adjust version available
- 3mm size meets EIA/EIAJ standard trimmer footprint

## 3303 - 3mm SMD Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....100 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±25% std.  
Absolute Minimum Resistance  
≤ 1K Ohms .....20 ohms max.  
>1K Ohms .....2% max. of TR  
Contact Resistance Variation ...5% max.  
Resolution .....Infinite  
Adjustment Angle .....260° ±20°

### Environmental Characteristics

Resistance to Soldering Heat  
.....260°C, 10 seconds, TRS max. 5%  
Power Rating (50 VDC max.)  
70°C .....0.15 watt  
Temperature Range  
.....-40°C to +125°C  
Temperature Coefficient  
.....±250ppm/°C  
Humidity .....95%RH  
500 hours  
TRS max. ....±5%  
Load Life  
.....@ 70°C rated power 500 hours  
Rotational Cycling .....20 turns  
TRS ±15%

### Physical Characteristics



Torque .....20-200g-cm max.  
Mechanical Angle .....Continuous  
Marking .....Part marking code  
Standard Packaging  
.....2000 pcs./7" reel  
Adjustment Tool .....H-90

### How To Order


**3303 X - 3 - 103 E**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Orientation of Parts In Tape:  
Styles W, C - Terminals Toward  
Sprocket Holes  
Styles X, D - Terminals Away  
From Sprocket Holes (preferred)  
Standard or Modified  
Product Indicator \_\_\_\_\_  
-1 = Single Slot  
\*-2 = Cross Slot Rotor (Optional)  
-3 = Cross Slot Low Profile (Standard)  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator \_\_\_\_\_  
Consult factory for other available options.  
\*Not available in C and D styles

#### 3303W, X-1 3mm Open Frame for Reflow Soldering 3-Terminal

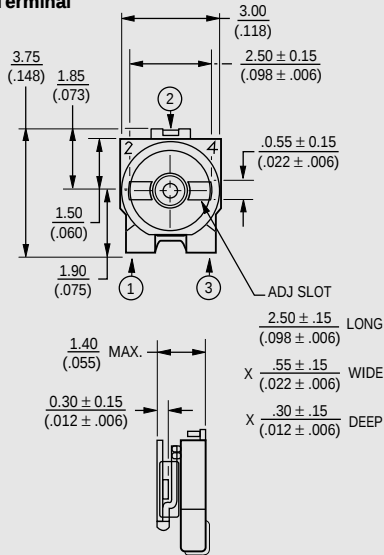

#### SUGGESTED PWB LAYOUT






TOLERANCES: ± 0.30 (.012) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

SHADED AREAS TYPICALLY NOT STOCKED BY  
DISTRIBUTORS AND NOT RECOMMENDED FOR NEW  
DESIGNS.


#### 3303W, X-3 3mm Open Frame for Reflow Soldering 3-Terminal Low Profile

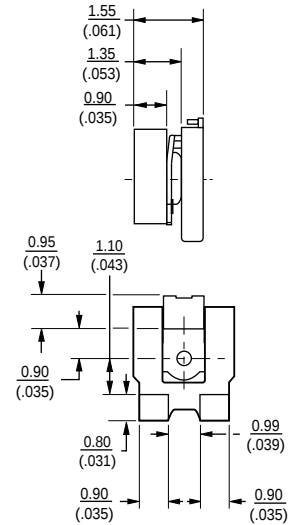


## 3303 - Dimensions and Tolerances

**BOURNS®**

**3303W, X-2**  
**3mm Open Frame**  
**for Reflow Soldering**  
**3-Terminal (OPTIONAL)**

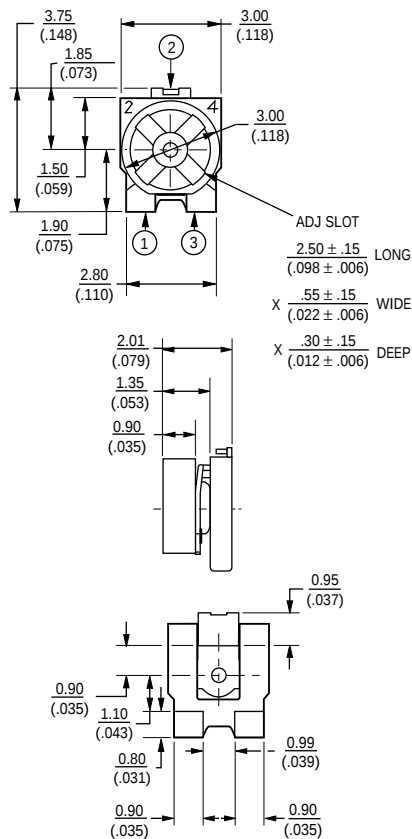


## SUGGESTED PWB LAYOUT




TOLERANCES:  $\pm 0.30$  (.012) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{(\text{INCHES})}$

**3303C,D**  
**3-Terminal**  
**Both Sides Adjust**  
**(OPTIONAL)**

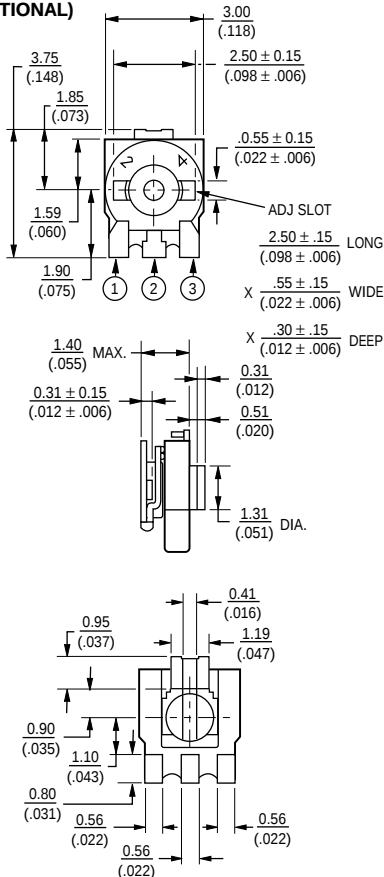


### SUGGESTED PWB LAYOUT



TOLERANCES:  $\pm 0.38$  (.015) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{(\text{INCHES})}$

### Packaging Specifications

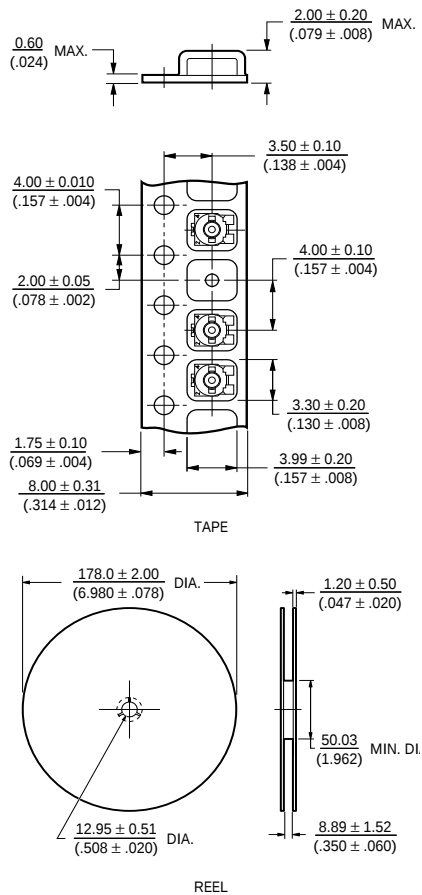

Meets EIA 481

TOLERANCES:  $\pm 0.25$  (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{(\text{INCHES})}$

### Standard Resistance Table

| Resistance<br>(Ohms) | Part Marking<br>Code | Resistance<br>Code |
|----------------------|----------------------|--------------------|
| 100                  | 12                   | 101                |
| 200                  | 22                   | 201                |
| 500                  | 52                   | 501                |
| <b>1,000</b>         | <b>13</b>            | <b>102</b>         |
| <b>2,000</b>         | <b>23</b>            | <b>202</b>         |
| <b>5,000</b>         | <b>53</b>            | <b>502</b>         |
| <b>10,000</b>        | <b>14</b>            | <b>103</b>         |
| <b>20,000</b>        | <b>24</b>            | <b>203</b>         |
| 50,000               | 54                   | 503                |
| 100,000              | 15                   | 104                |
| 200,000              | 25                   | 204                |
| 500,000              | 55                   | 504                |
| 1,000,000            | 16                   | 105                |

Popular values listed in boldface.

SHADED AREAS TYPICALLY NOT STOCKED BY  
DISTRIBUTORS AND NOT RECOMMENDED FOR NEW  
DESIGNS.



## Features

- 6mm Round / Single-Turn / Cermet Industrial / Open Frame
- Cross slot adjustment options
- Horizontal and vertical mounting styles
- Dust resistant/splash resistant covers
- PC board stand-offs and retention feature

## ■ Front and top adjust styles

# 3306 - 6mm Round Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range .....100 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±25% std.  
Absolute Minimum Resistance .....2% max. ( $\leq 2K = 30$  ohms)  
Contact Resistance Variation ...3% max.  
Resolution.....Infinite  
Adjustment Angle .....215° nom.

## Environmental Characteristics

Power Rating (100 volts max.)  
70°C .....0.2 watt  
Temperature Range .....-25°C to +100°C  
Temperature Coefficient .....±250ppm/°C  
Load Life ..1,000 hours 0.2 watt @ 70°C  
(5% ΔTR)

## Physical Characteristics

Mechanical Angle.....260° ±20°  
Torque (Operating).....4.5 oz-in. max.  
Stop Strength .....6.5 oz-in. min.  
Terminals .....Solderable pins  
Marking .....Manufacturer's trademark, resistance code  
Standard Packaging .....300 pcs. per bag  
Adjustment Tool .....H-90  
Aqueous cleaning not recommended

## How To Order

Model **3306 W - 1 - 103**  
Style \_\_\_\_\_  
Standard Product \_\_\_\_\_  
Resistance Code \_\_\_\_\_


## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |


Popular values listed in boldface. Special resistances available.

SHADED AREA NOT TYPICALLY STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.


## Top Adjust Common Dimensions

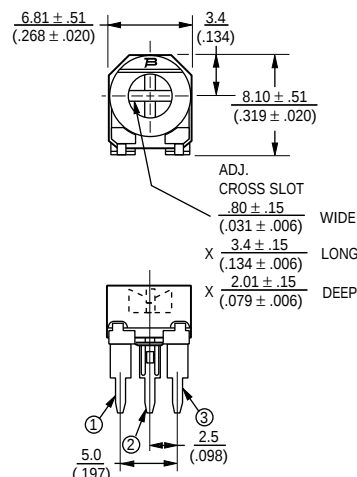


## 3306P




## 3306F




## SUGGESTED PWB LAYOUT - STYLE F

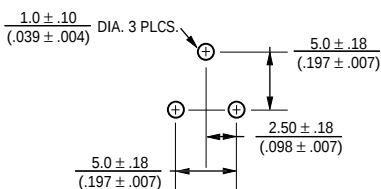


## Side Adjust Common Dimensions

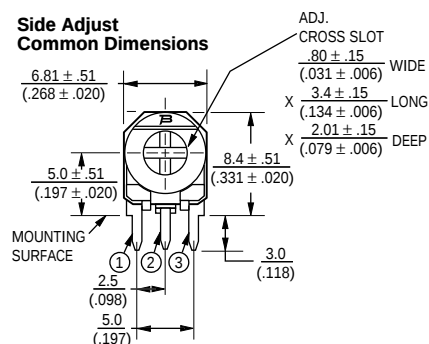



## 3306W



## 3306K



## SUGGESTED PWB LAYOUT - STYLES K, P, W



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)



## Features

- 9mm Round / Single-Turn / Cermet Industrial / Open Frame
- Both sides adjust
- Cross slot and hexagon adjustment designs
- Horizontal and vertical mounting styles

- Dust resistant/splash resistant covers
- PC board stand-offs and retention feature

## 3309 - 9mm Round Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range

.....100 to 2 megohms  
(see standard resistance table)

Resistance Tolerance .....±25% std.

Absolute Minimum Resistance

.....2% max. (≤2K = 30 ohms)

Contact Resistance Variation ...3% max.

Resolution.....Infinite

Adjustment Angle .....235° nom.

### Environmental Characteristics

Power Rating (250 volts max.)

70°C .....0.5 watt

Temperature Range .....-25°C to +100°C

Temperature Coefficient .....±250ppm/°C

Load Life .....1,000 hours 0.5 watt

@ 70°C (5% ΔTR)

### Physical Characteristics

Mechanical Angle.....260°±20°

Torque (Operating).....5 oz-in. max.

Stop Strength.....11.0 oz-in. min.

Terminals .....Solderable pins

Marking .....Manufacturer's

trademark, resistance code

Standard Packaging .....200 pcs. per bag

Adjustment Tool .....H-90


Aqueous cleaning not recommended

### How To Order


**3309 W - 2 - 103**

Model \_\_\_\_\_  
Pin Style \_\_\_\_\_  
Rotor Style \_\_\_\_\_  
-2 = Cross Slot/Single Slot Rear Adjust  
-3 = 2mm Hex Thru Hole  
Resistance Code \_\_\_\_\_


### Top/Bottom Adjust Common Dimensions 3309P

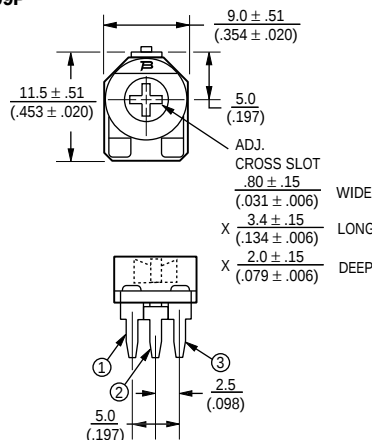



### 3309P-1 Top Adjust




### 3309P-2 Both Sides Adjust/Cross Slot




### 3309P-3 Both Sides Adjust Hex

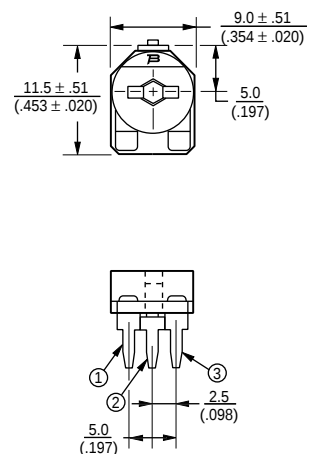

HEX THRU HOLE  $2.0$  ( $.079$ ) ACROSS FLATS




### SUGGESTED PWB LAYOUT - 3309P



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC (INCHES)




# 3309 - 9mm Round Trimming Potentiometer

**BOURNS®**


## Side Adjust Common Dimensions 3309W

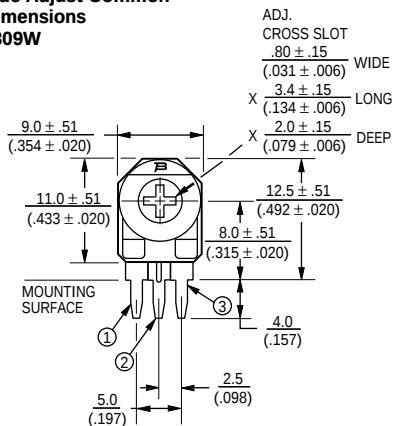




## 3309W-3 Both Sides Adjust Hex

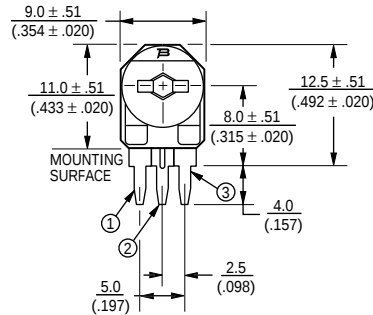


## 3309W-1 Single Side (Front) Adjust



## 3309W-2 Both Sides Adjust - Cross Slot

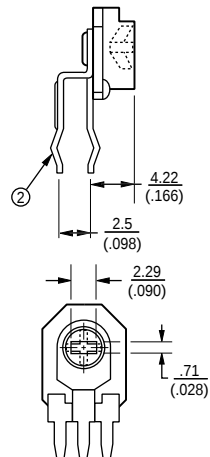

## SUGGESTED PWB LAYOUT - 3309W



## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREA NOT TYPICALLY STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.



## Features

- Surface Mount 3mm Square Single-Turn Cermet / Sealed
- Compatible with surface mount manufacturing processes
- Rotor stop for "in-circuit" adjustment
- 100 cycle rotational and seal life

- Patent #5043695 assembly for seal integrity
- Plastic housing for RF applications

## 3313 - 3mm Trimming Potentiometer

### Electrical Characteristics

#### Standard Resistance Range

.....10 ohms to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±20% std.  
End Resistance.....1% or 3 ohms max.  
(whichever is greater)

#### Contact Resistance Variation

.....3% or 3 ohms

#### Adjustability

Voltage Divider.....±0.1%  
Rheostat .....±0.2%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
100 megohms min.

#### Dielectric Strength

Sea Level .....500 vac  
70,000 Feet.....350 vac  
Adjustment Angle .....220° nom.

### Environmental Characteristics

#### Max. Soldering Exposure

.....260°C/5 seconds

#### Power Rating (200 volts max.)

70°C .....0.125 watt

125°C .....0 watt

#### Operating Temp. Range...-55°C to +125°C

#### Temperature Coefficient

.....≤100 ohms ±150ppm/°C;  
.....>100 ohms ±100ppm/°C

#### Seal Test .....85°C Fluorinert\*

Humidity .....MIL-STD 202, Method 106  
(no vibration) TRS ±3%;

IR 10 megohms

Vibration .....20G TRS ±1%; VRS ±1%

Shock.....100G TRS ±1%; VRS ±1%

Load Life .....1000 hours

@ 70°C Rated Power; TRS ± 3%

Rotational Life .....100 cycles TRS ±3%

Thermal Shock.....5 cycles

TRS ±2%; VRS ±1%

### Physical Characteristics

Mechanical Angle .....250° nom.

Torque .....50g-cm max.

Stop Strength.....200g-cm min.

Pushover Strength ("S" only)

.....1.6 Kilograms (3.5 lbs) minimum

Flammability.....U.L. 94V-0

Weight.....Approx. 0.01 oz.

Marking .....Resistance code


and date code

Wiper .....Set at 50% nominal


Standard Packaging .....1000 pcs./7" reel

Adjustment Tool .....H-91

3313J

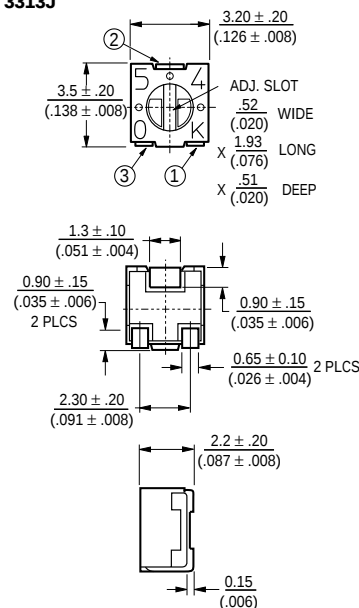

RECOMMENDED LAND PATTERN



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED



DIMENSIONS ARE: METRIC (INCHES)

### How To Order



3313 J - 1 - 502 E

Model \_\_\_\_\_  
 Style \_\_\_\_\_  
 Standard or Modified Product Indicator \_\_\_\_\_  
 -1 = Standard Product  
 Resistance Code \_\_\_\_\_  
 Embossed Tape \_\_\_\_\_  
 1000 pcs. / 7" Reel (Standard)

3313S

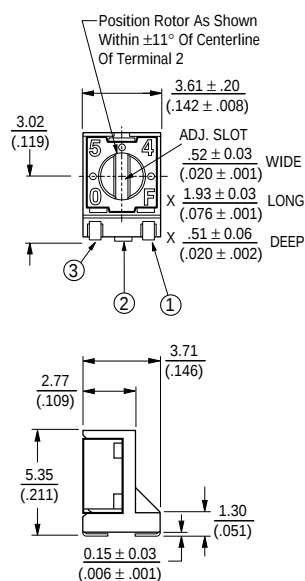

RECOMMENDED LAND PATTERN




\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

# 3313 - 3mm Trimming Potentiometer

**BOURNS®**


## 3313 Packaging Specifications

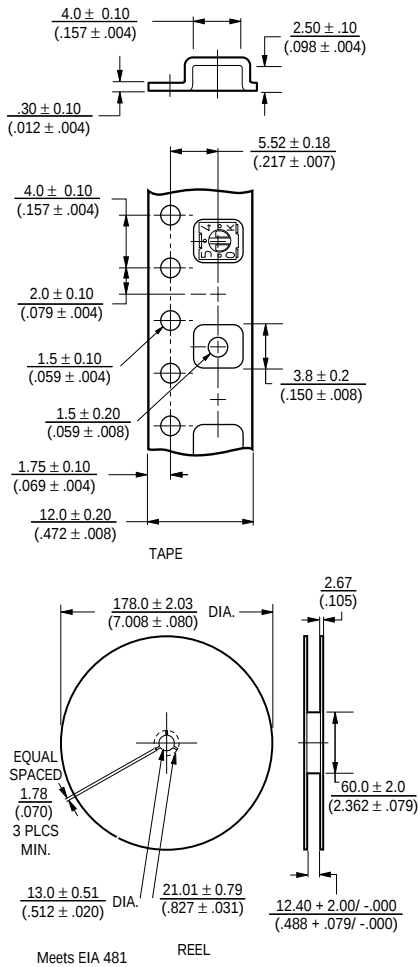

TOLERANCES:  $\pm 0.25$  (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{\text{(INCHES)}}$

## 3313S Packaging Specifications

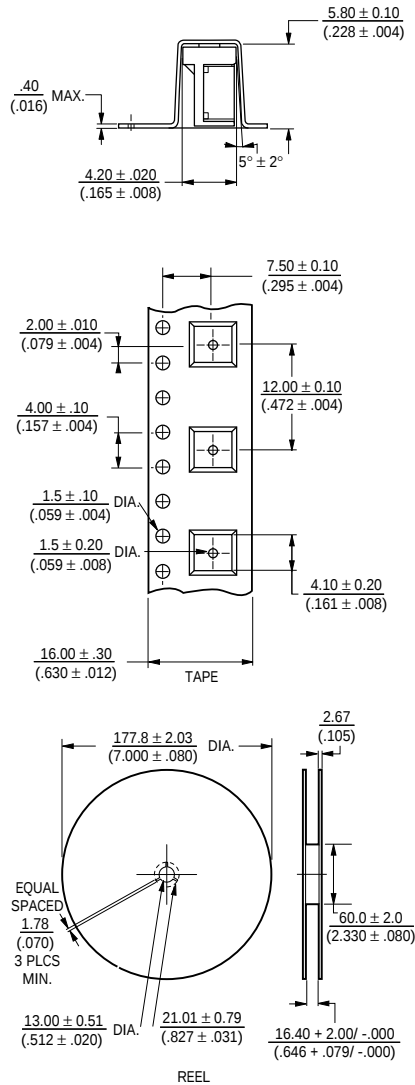

## Standard Resistance Table

| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 10                | A1                | 100             |
| 20                | 21                | 200             |
| 50                | 51                | 500             |
| <b>100</b>        | <b>A2</b>         | <b>101</b>      |
| <b>200</b>        | <b>22</b>         | <b>201</b>      |
| <b>500</b>        | <b>52</b>         | <b>501</b>      |
| <b>1,000</b>      | <b>A3</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>A4</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| <b>50,000</b>     | <b>54</b>         | <b>503</b>      |
| <b>100,000</b>    | <b>A5</b>         | <b>104</b>      |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | A6                | 105             |
| 2,000,000         | 26                | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREA NOT TYPICALLY STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.



## Features

- Surface Mount / Single Turn / Cermet Industrial / Sealed
- Compatible with surface mount manufacturing processes
- Compatible with popular vacuum pick-and-place equipment

- J-hook, gull-wing and pinned configurations
- Side adjust available
- Cross-slot rotor (Z Style)
- Meets EIA/EIAJ/IPC/VRCI SMD standard trimmer designs

## 3314 - 4mm Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 ohms to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±20% std.  
(tighter tolerance available)  
End Resistance.....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
.....1% or 3 ohms  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
100 megohms min.  
Dielectric Strength  
Sea Level.....500 vac (1 minute)  
Adjustment Angle .....210° nom.


### Environmental Characteristics

Soldering Heat  
.....260°C, 10 seconds, TRS ±1%  
Power Rating (300 volts max.)  
70°C.....0.25 watt  
125°C.....0 watt  
Temperature Range .....-55°C to +125°C  
Temperature Coefficient .....±100ppm/°C  
Humidity .....90-98% RH,  
10 cycles, 240 hours  
Vibration .....20G TRS ±1%; VRS ±1%  
Shock .....100G TRS ±1%; VRS ±1%  
Load Life  
.....(@ 70°C Rated Power 1000 Hours)  
TRS ±3%  
Rotational Life .....100 cycles  
TRS ±3%  
Thermal Shock .....5 cycles  
TRS ±2%; VRS ±1%


### Physical Characteristics

Mechanical Angle .....240° nom.  
Torque .....180g-cm typical  
Stop Strength .....300g-cm typical  
Pushover Strength (Z Style)  
.....2 kilograms (4.4 lbs.) minimum  
Weight .....Approximately 0.01 oz.  
Marking .....Manufacturer's code,  
resistance code and date code  
Wiper .....Positioned at 50% nominal  
Flammability.....U.L. 94V-0  
Standard Packaging  
J & G .....500 pcs./7" reel  
Z .....200 pcs./7" reel  
H .....50 pcs./tube  
Adjustment Tool .....H-90


3314J-1

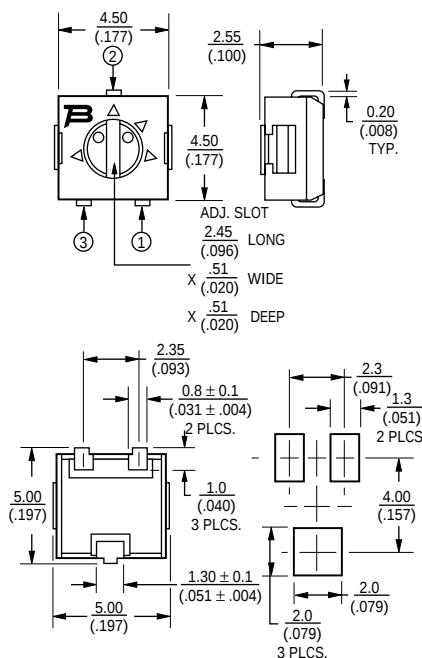

3314G-1

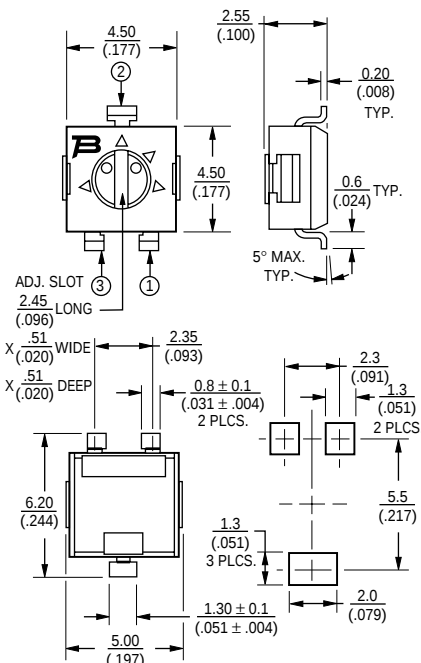

3314R-1

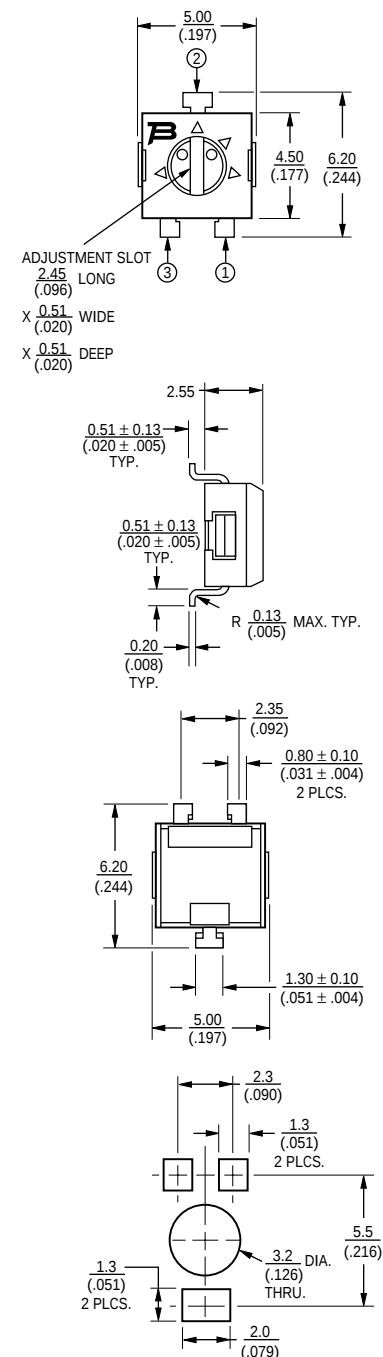

DIMENSIONS ARE: METRIC (INCHES)



## Additional Features

- Model 3314 has been approved for use by D.C. on Drawings 88039 (3314) and 90027 (3314G)

# 3314 - 4mm Square Trimming Potentiometer

**BOURNS®**

3314H-1

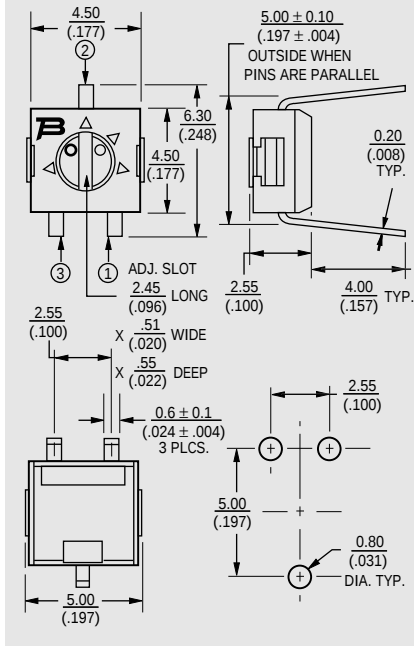

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)



SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

## How To Order


**3314 J - 1 - 502 E**

- Model \_\_\_\_\_  
 Style \_\_\_\_\_  
 Standard or Modified Product Indicator  
 -1 = Single Slot  
 -2 = Cross Slot Rotor (Style Z is standard, Styles J, G & H are available)  
 Resistance Code \_\_\_\_\_  
 Embossed Tape Designator (Applicable to Styles J, G and S only)  
 Styles J & G: 500 pcs. / 7" reel (standard)  
 Style Z: 200 pcs. / 7" reel (standard)  
 Consult factory for other available options.

3314Z

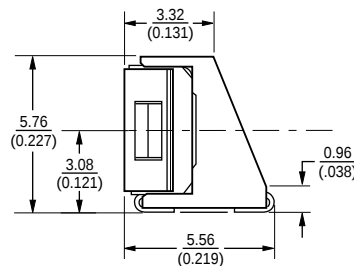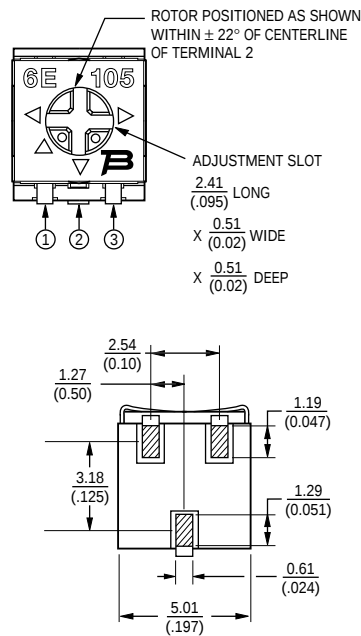


RECOMMENDED PCB LAYOUT




## Packaging Specifications

### (J, G Styles)

TAPE

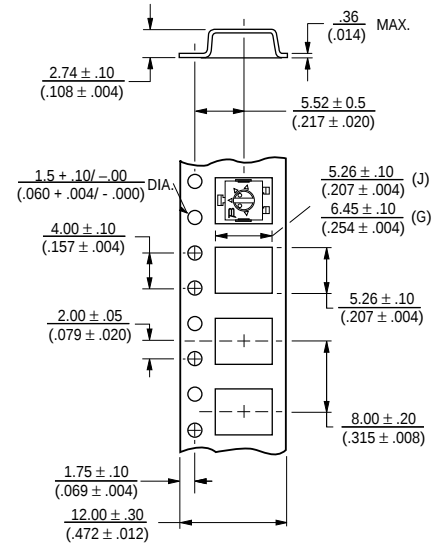

REEL

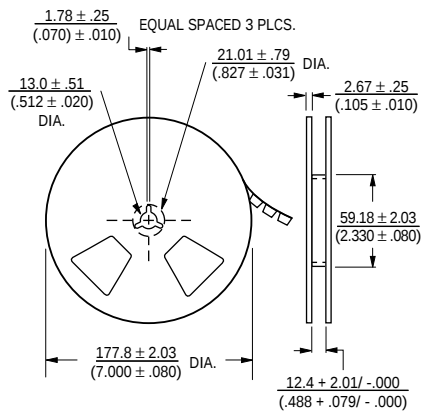

Meets EIA specification 481.


# 3314 - 4mm Square Trimming Potentiometer

**BOURNS®**


## Packaging Specifications

### (R Style)

TAPE

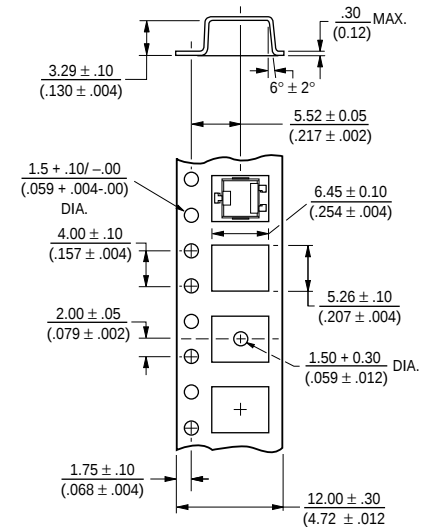

REEL

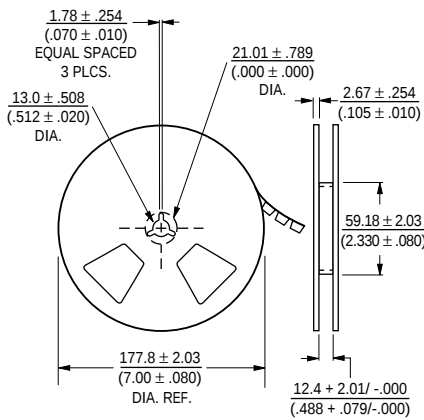


Meets EIA specification 481.


## Packaging Specifications

### (Z Style)

TAPE

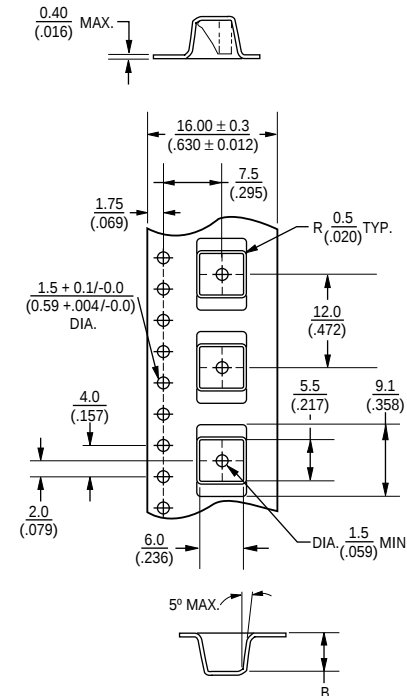

REEL

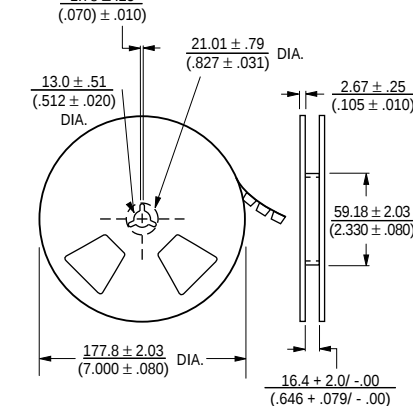

TOLERANCES: ± 0.30 (.012) EXCEPT WHERE NOTED


DIMENSIONS ARE:  $\frac{\text{METRIC}}{\text{(INCHES)}}$

## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

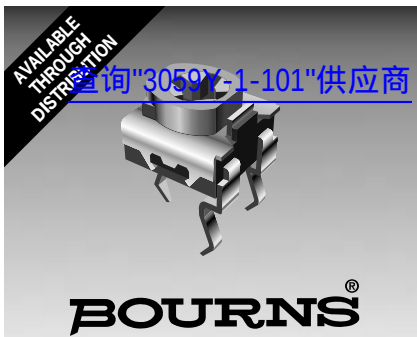

## Features

- Single-Turn / Carbon / Commercial Open Frame
- Cross slot rotor design suitable for automatic adjustment equipment
- Board retention feature
- Enclosed cover

- PC board stand-offs
- Adjustable front/back, top/bottom

# 3318 - 6mm Square Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range  
.....100 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±30%  
Contact Resistance Variation  
.....10% max.  
Resolution.....Infinite  
Adjustment Angle.....210° ±20°

## Environmental Characteristics

Power Rating  
100-500K ohms.....50V  
>500K ohms .....25V  
50°C.....0.1 watt  
Temperature Range.....-25°C to +100°C  
Temperature Coefficient ...±1000ppm/°C  
Load Life ...1,000 hours 0.1 watt @ 70°C  
(20% ΔTR)

## Physical Characteristics

Torque (Operating).....20-250 g-cm  
Stop Strength  
Knob Side .....750 g-cm  
Reverse Side .....350g-cm  
Terminals .....Solderable pins  
Marking .....Resistance code, date code  
Standard Packaging ....200 pcs. per bag  
Adjustment Tool .....H-90  
Aqueous cleaning not recommended

## How To Order

**3318 K - 1 - 103**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard Product \_\_\_\_\_  
Resistance Code \_\_\_\_\_

## Standard Resistance Table



| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface.


SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

## 3318K


FRONT VIEW

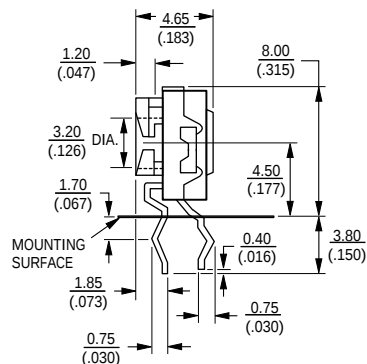

REAR VIEW

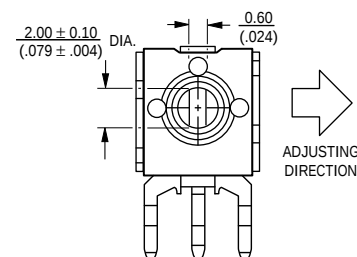


SUGGESTED PWB LAYOUT




## 3318F



FRONT VIEW

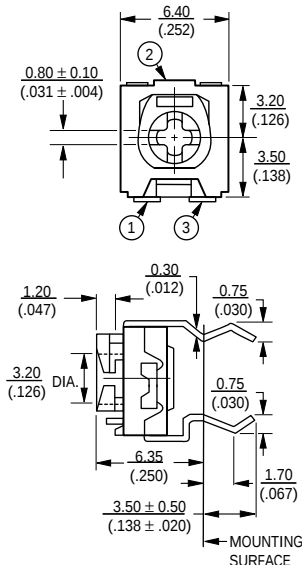

REAR VIEW

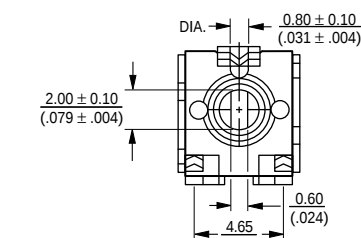

SUGGESTED PWB LAYOUT



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{METRIC}}{\text{(INCHES)}}$

Specifications are subject to change without notice.



## Features

- 9mm Round / Single Turn / Carbon Commercial / Open Frame
- Both sides adjust
- Cross slot and hexagon adjustment designs
- Horizontal and vertical mounting styles

- Dust resistant/splash resistant covers
- PC board stand-offs and retention feature

## 3319 - 9mm Round Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....100 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±25% std.  
End Resistance .....2% max. (≤2K = 30 ohms)  
Contact Resistance Variation .....3% max.  
Resolution.....Infinite  
Adjustment Angle .....235° nom.

### Environmental Characteristics

Power Rating (200 volts max.)  
70°C.....0.2 watt  
Temperature Range .....-25°C to +100°C  
Temperature Coefficient .....±1000ppm/°C  
Load Life .....1,000 hours 0.2 watt @ 70°C  
(<100K = +3/-7% ΔTR)  
(≥100K = +3/-10% ΔTR)

### Physical Characteristics

Torque (Operating) .....5 oz-in. max.  
Stop Strength .....11.0 oz-in. min.  
Terminals.....Solderable pins  
Marking .....Manufacturer's trademark, resistance code  
Standard Packaging .....200 pcs. per bag  
Adjustment Tool .....H-90


Aqueous cleaning not recommended

### How To Order


**3319 W - 2 - 103**

Model \_\_\_\_\_  
Pin Style \_\_\_\_\_  
Rotor Style \_\_\_\_\_  
-2 = Cross Slot/Single Slot Rear Adjust  
-3 = 2mm Hex Thru Hole  
Resistance Code \_\_\_\_\_


### 3319P Common Dimensions

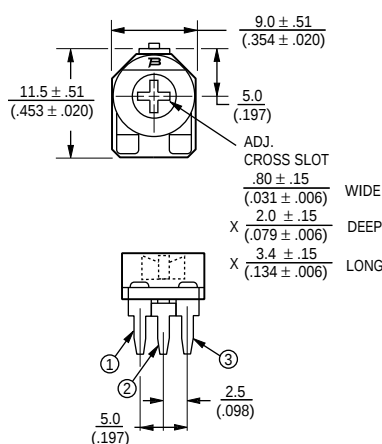




### 3319P-1 Top Adjust




### 3319P-2 Both Sides Adjust/Cross Slot

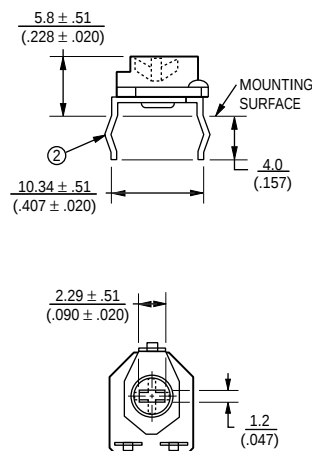

### 3319P-3 Both Sides Adjust/Hex

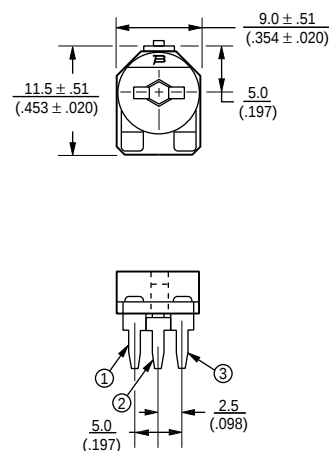

### SUGGESTED PWB LAYOUT - 3319P




TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)


# 3319 - 9mm Round Trimming Potentiometer

**BOURNS®**

## Side Adjust 3319W-1

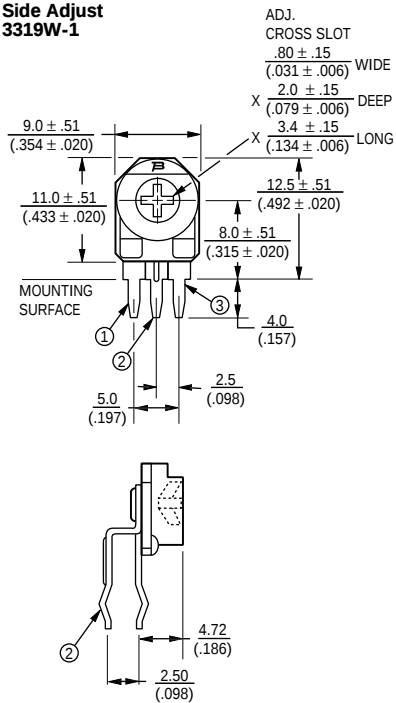

## 3319W-3 Both Sides Adjust/Hex

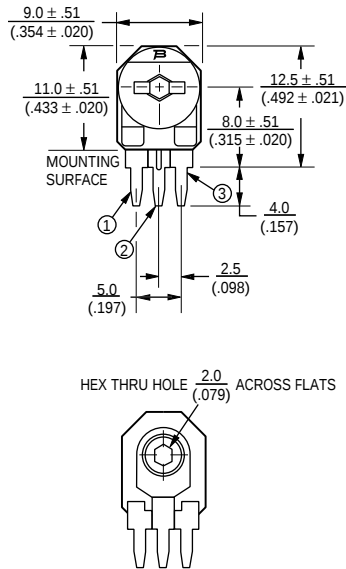


## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |


Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

## 3319W-2 Both Sides Adjust /Cross Slot

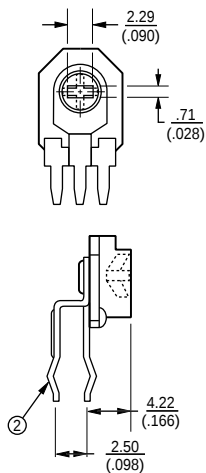



## SUGGESTED PWB LAYOUT - 3319W



TOLERANCES:  $\pm 0.25$  (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)



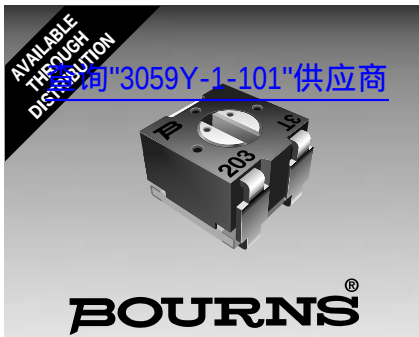

## Features

- Surface Mount / Single-Turn / Cermet Industrial / Sealed
- Compatible with surface mount manufacturing processes
- Standoffs facilitate boardwashing and mechanical stability

- Plastic housing for RF applications
- Low profile
- Patent #5043695 assembly for seal integrity

## 3324 - 4mm Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 ohms to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±20% std.  
(tighter tolerance available)  
End Resistance  
.....1% or 3 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
.....3% or 3 ohms max.  
(whichever is greater)  
Resolution.....Essentially Infinite  
Insulation Resistance .....500 vdc.  
100 megohms min.  
Dielectric Strength  
Sea Level.....500 vac (1 minute)  
Adjustment Angle .....220° nom.

### Environmental Characteristics

Soldering Heat  
.....260°C, 10 seconds, TRS ±1%  
Power Rating (200 volts max.)  
70°C.....0.25 watt  
125°C.....0 watt  
Operating Temperature Range  
.....-55°C to +125°C  
Temperature Coefficient  
<100 Ohms .....±150ppm/°C  
>100 Ohms .....±100ppm/°C  
Humidity .....80-98% RH,  
10 cycles, 240 hours  
TRS ±3%; IR 10 megohms  
Vibration .....20G TRS ±1%; VRS ±1%  
Shock .....100G TRS ±1%; VRS ±1%  
Load Life  
.....(@ 70°C Rated Power 1000 Hours)  
TRS ±3%  
Rotational Cycling .....100 cycles  
TRS ±3%  
Thermal Shock .....5 cycles  
TRS ±2%; VRS ±1%


### Physical Characteristics

Mechanical Angle .....250° nom.  
Torque .....50g-cm typical  
Stop Strength .....200g-cm typical  
Weight .....Approximately 0.01 oz.  
Marking .....Manufacturer's code,  
resistance code and date code  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L. 94V-0  
Adjustment Tool .....H-91


### How To Order

Model **3324 J - 1 - 502 E**  
Style \_\_\_\_\_  
Standard or Modified \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Embossed Tape \_\_\_\_\_  
1000 pcs./7" Reel (Standard)


### 3324J Common Dimensions

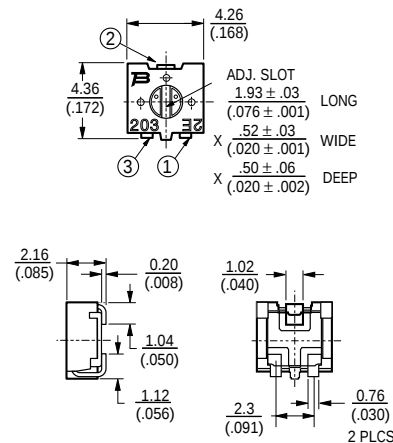

#### RECOMMENDED LAND PATTERN



### 3324G

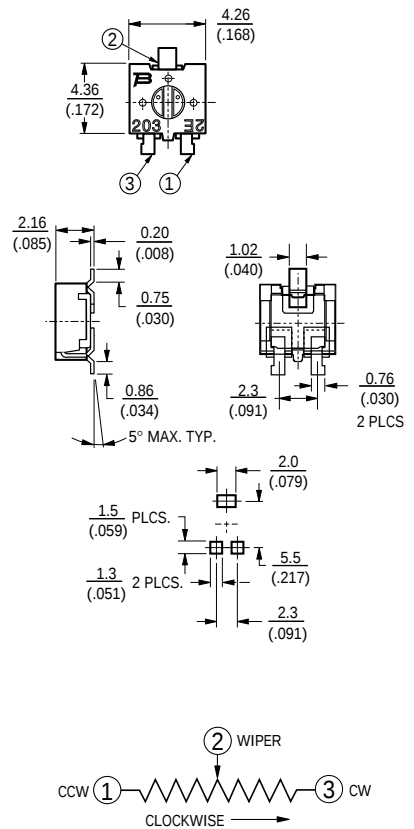


TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

# 3324 - 4mm Square Trimming Potentiometer

**BOURNS®**


**Packaging Specifications**

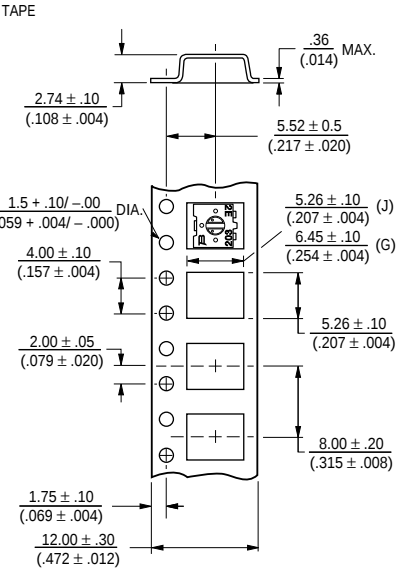

**Standard Resistance Table**

| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 10                | A1                | 100             |
| 20                | 21                | 200             |
| 50                | 51                | 500             |
| <b>100</b>        | <b>A2</b>         | <b>101</b>      |
| <b>200</b>        | <b>22</b>         | <b>201</b>      |
| <b>500</b>        | <b>52</b>         | <b>501</b>      |
| <b>1,000</b>      | <b>A3</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>A4</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| <b>50,000</b>     | <b>54</b>         | <b>503</b>      |
| <b>100,000</b>    | <b>A5</b>         | <b>104</b>      |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | A6                | 105             |
| 2,000,000         | 26                | 205             |

Popular values listed in boldface. Special resistances available.

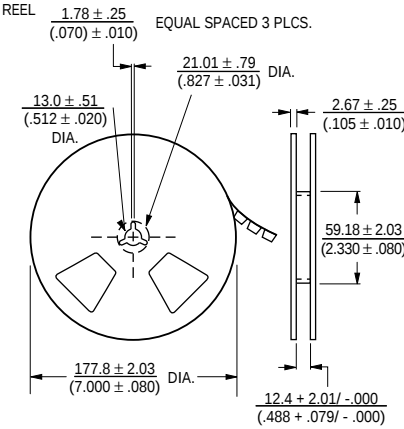


Meets EIA specification 481.

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

查询"30597-1101"供应商



**BOURNS®**

## Features

- Single-turn / conductive plastic
- Commercial / dust proof / fully enclosed
- Cross slot rotor design suitable for automatic adjustment equipment
- Hexagon adjustment design
- PC board stand-off and retention feature

- Adjustable front/back, top/bottom

## 3328 - 9mm Square Trimming Potentiometer

### Electrical Characteristics

Resistance Range.....100Ω - 5.0 MΩ  
Resistance Tolerance  
100Ω - 1.0 MΩ, ± 20%  
>1.0MΩ- 5.0 MΩ, ± 30%  
End Resistance .....3% Max  
Contact Resistance Variation ....3Ω or 3%  
whichever is greater  
Resolution .....(Infinite)  
Adjustment Angle .....220°±20°  
Max. Operating Voltage .....200 V



### Environmental Characteristics

Power Rating .....40°C, 0.20 Watts  
Temperature Range.....-25°C to + 70° C  
Temperature Coefficient of Resistance  
.....±400 ppm, 100Ω < TR ≤ 1 MΩ  
Load Life .....1000 hours 0.20w at 40°C,  
TRS ±10%  
Vibration .....20 g, TRS ± 2%, VRS ± 2%  
Shock .....100 g, TRS ± 2%, VRS ± 2%  
Rotational Cycling .....500 cycles,  
TRS ± 3%


### Physical Characteristics

Torque (Operating).....50-200 g.cm  
Stop Strength .....550 g.cm  
Terminals .....Solderable Pins  
Marking.....Manufacturer's trademark,  
resistance code and date code  
Standard Packaging ...200 Pcs. per Bag  
Mechanical Angle .....250° ± 20°  
Flammability.....UL94V-0  
Wiper Position .....50% nominal


### Product Dimensions

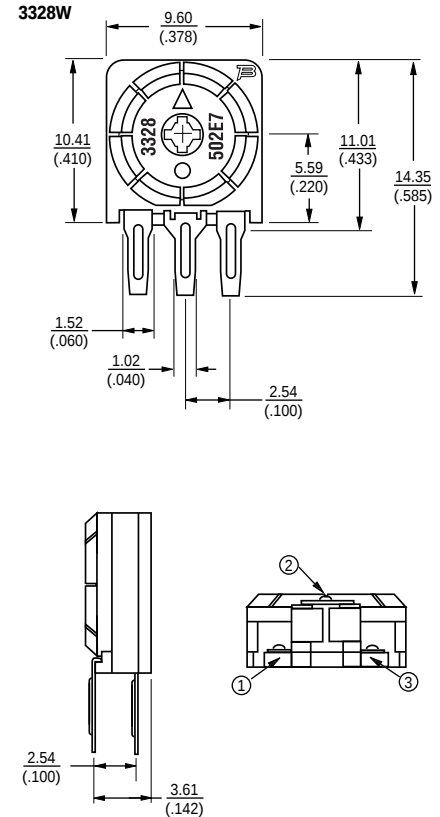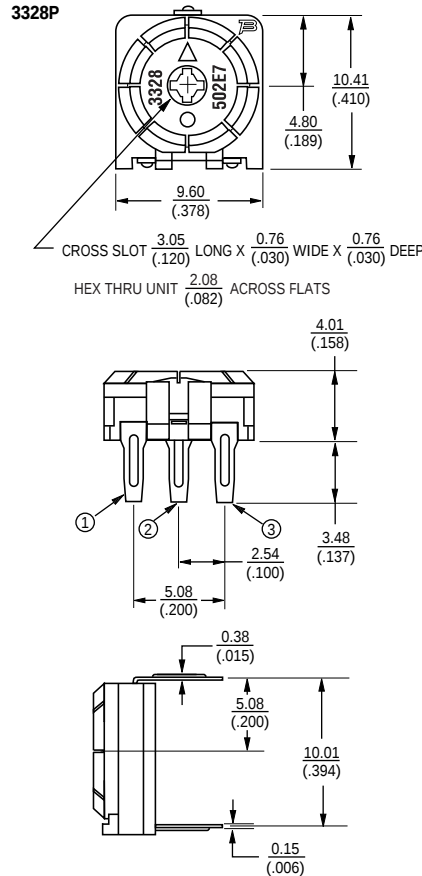


### RECOMMENDED PWB MOUNTING PATTERN




### RECOMMENDED PWB MOUNTING PATTERN



### ADJUSTMENT ACCESSORIES

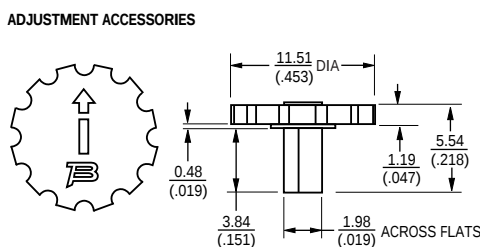


H118-1 Wheel

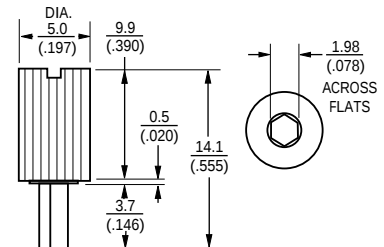

H118-2 Shaft

DIMENSIONS ARE: METRIC  
(INCHES)



3328 - 9mm Square Trimming Potentiometer

BOURNS®

How to Order

3328 P - 1 - 502

Model

Style

Standard or Modified

Product Indicator


-1 = Standard Product

Resistance Code

Adjustment accessories as noted.  
Example: H118-1 = Wheel

Standard Resistance Table

| Resistance (Ohms) | Resistance Code | Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|-------------------|-----------------|
| 100               | 101             | 50000             | 503             |
| 500               | 501             | 100000            | 104             |
| 1000              | 102             | 200000            | 204             |
| 2000              | 202             | 500000            | 504             |
| 5000              | 502             | 1000000           | 105             |
| 10000             | 103             | 2000000           | 205             |
| 20000             | 203             | 5000000           | 505             |
| 25000             | 253             |                   |                 |

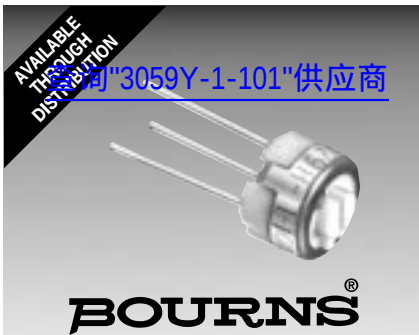

## Features

- 1/4" Round / Single-Turn / Cermet Industrial / Sealed
- 5 standard terminal styles
- Tape and reel packaging available (see page 71 for details)

# 3329 - 1/4" Round Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range .....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(closer tolerance available)  
Absolute Minimum Resistance .....1% or 2 ohms  
(whichever is greater)  
Contact Resistance Variation .....3.0% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.05%  
Resistance .....±0.15%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....600 vac  
80,000 Feet .....250 vac  
Adjustment Angle .....240° nom.


## Environmental Characteristics

Power Rating @ 85°C (300 volts max.) .....0.5 watt  
Power Rating @ 150°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 106  
96 hours  
(3% ΔTR, 10 Megohms IR)  
Vibration.....30G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life  
.....1,000 hours 0.5 watt @ 85°C  
(3% ΔTR; 3% CRV)  
Rotational Life .....200 cycles  
(4% ΔTR; 4% CRV)


## Physical Characteristics

Mechanical Angle .....260° nom.  
Torque .....5.0 oz-in. max.  
Stop Strength .....5.0 oz-in. min.  
Terminals .....Solderable pins  
Weight .....0.02 oz.  
Marking .....Manufacturer's trademark,  
resistance code, date code,  
manufacturer's model number  
and style  
Wiper .....Positioned at 50% nominal  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### 3329H

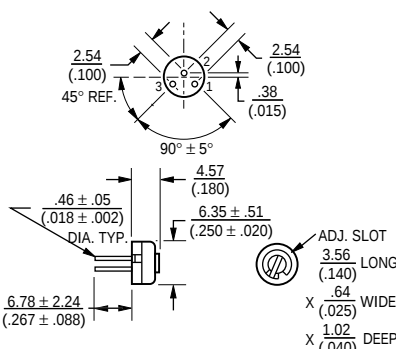


### 3329P




### 3329S

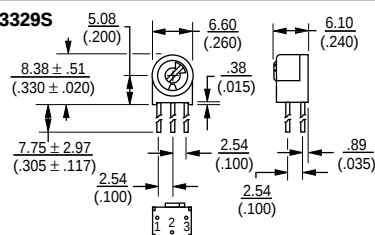

### 3329W

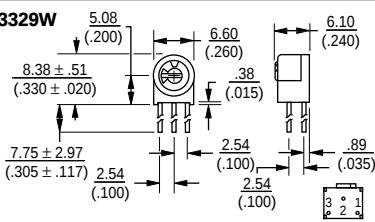


### 3329X

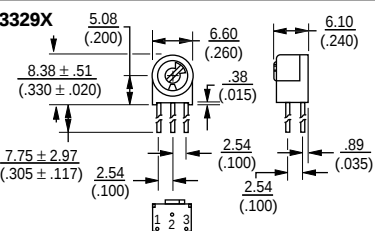

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

### 3329P-DK9-RC

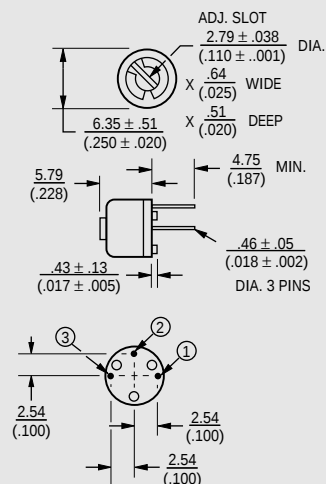

## How To Order

Model **3329 H - 1 - 103**  
Style \_\_\_\_\_  
Standard or Modified Product Indicator  
-1 = Standard Product  
-DK9 = Plastic Spacer  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.


## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

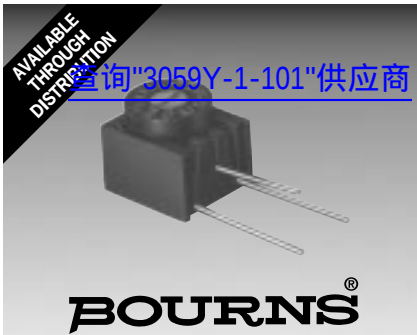

## Features

- Four-Turn / Cermet / Industrial / Sealed
- Unique planetary drive offers precise wiper setting of a multiturn in a single-turn package size
- Top and side adjust styles

## 3339 - 5/16" Round Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation .....±0.1%  
(whichever is greater)  
Adjustability  
Voltage .....±0.05%  
Resistance .....±0.1%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....600 vac  
80,000 Feet .....250 vac  
Effective Travel.....4 turns nom.

### Environmental Characteristics


Power Rating (300 volts max.)  
85°C .....0.5 watt  
150°C .....0 watt  
Temperature Range .....-55°C to +150°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 103  
96 hours  
(3% ΔTR, 10 Megohms IR)  
Vibration.....30G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life .....1,000 hours 0.5 watt @ 85°C  
(3% ΔTR; 3% or 3 ohms, whichever is greater, CRV)  
Rotational Life .....200 cycles  
(3% ΔTR; 3% or 3 ohms, whichever is greater, CRV)

### Physical Characteristics


Torque .....3 oz-in. max.  
Mechanical Stops.....Wiper idles  
Terminals .....Solderable pins  
Weight .....0.02 oz.  
Marking .....Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style  
Wiper .....Positioned at 50% nominal  
Flammability .....U.L.94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.


### 3339H Common Dimensions (Top Adjust)

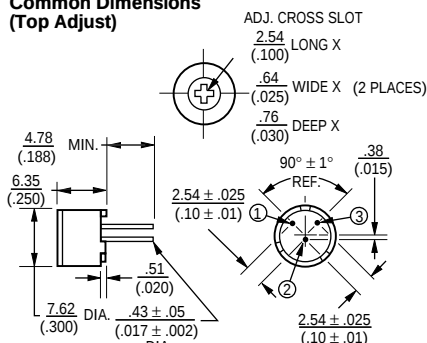



### 3339P

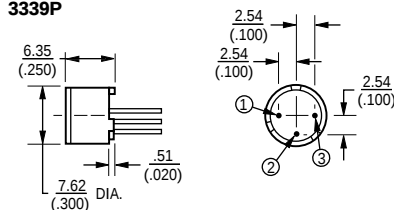

### 3339S Common Dimensions (Side Adjust)

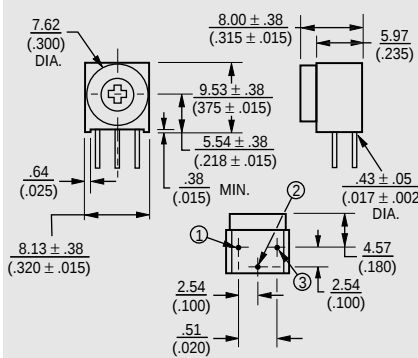

### 3339W

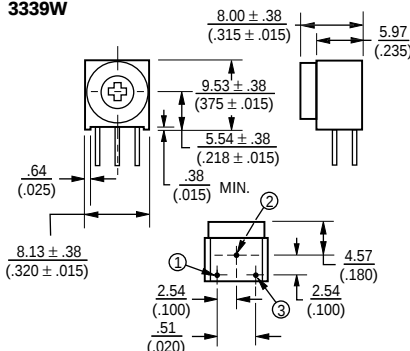

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

### How To Order

**3339 H - 1 - 103**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified Product Indicator \_\_\_\_\_  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.



## Features

- Single-Turn / Cermet / Industrial / Open Frame
- Stable cermet element offers infinite resolution
- Very low profile
- Seven standard pin styles

- Thumb and screwdriver adjustment

## 3352 - 3/8" Round Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
.....10 to 2 megohms  
(see standard resistance table)

Resistance Tolerance .....±20% std.  
(tighter tolerance available)

Absolute Minimum Resistance  
.....2 ohms max.

Contact Resistance Variation  
.....1.0% or 1 ohm max.  
(whichever is greater)

Adjustability  
Voltage .....±0.05%  
Resistance .....±0.25%  
Resolution.....Infinite

Dielectric Strength  
Sea Level .....500 vac  
80,000 Feet .....350 vac  
Adjustment Angle .....205° nom.

### Environmental Characteristics

Power Rating (250 volts max.)  
85°C .....0.50 watt  
125°C .....0 watt

Temperature Range  
.....-55°C to +125°C

Temperature Coefficient  
±100ppm/°C .....2K & up  
±150ppm/°C .....Below 2K

Humidity.....MIL-STD-202 Method 103  
96 hours  
(2% ΔTR, 10 Megohms IR)

Vibration.....30G (2% ΔTR; 2% ΔVR)

Shock.....100G (2% ΔTR; 2% ΔVR)

Load Life  
.....1,000 hours 0.5 watt @ 85°C  
(3% ΔTR)

Rotational Life .....200 cycles  
(10% ΔTR)

### Physical Characteristics

Mechanical Angle .....250° nom.

Torque .....3.0 oz-in. max.

Stop Strength .....8 oz-in. min.

Terminals .....Solderable pins

Weight .....0.01 oz.


Marking .....Manufacturer's  
trademark, resistance value  
and model number.  
Date code on packaging.

Wiper .....Set at CW end


Standard Packaging  
.....100 pcs. per bag

Adjustment Tool .....H-90


#### 3352

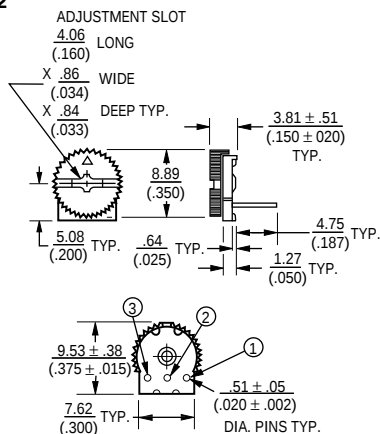



#### 3352E Top Adjust



#### 3352P



#### 3352T



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

### How To Order

**3352 W - 1 - 103**

Model \_\_\_\_\_

Style \_\_\_\_\_

Standard or Modified \_\_\_\_\_


Product Indicator \_\_\_\_\_  
-1 = Standard Product

Resistance Code \_\_\_\_\_


Consult factory for other available options.

#### 3352H


#### Side Adjust

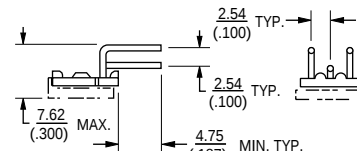


#### 3352K



#### 3352V



#### 3352W




### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>25,000</b>     | <b>253</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

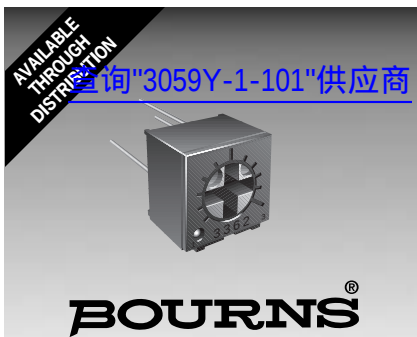

## Features

- Single-Turn / Cermet / Industrial / Sealed
- Miniature package
- Rotor designed for automatic machine adjust interface
- Withstands harsh environments and immersion cleaning processes

■ Available on tape and reel packaging (see page 71)

## 3362 - 1/4" Square Trimming Potentiometer

### Electrical Characteristics

#### Standard Resistance Range

.....10 to 2 megohms  
(see standard resistance table)

Resistance Tolerance .....±10% std.  
(tighter tolerance available)

#### Absolute Minimum Resistance

.....1% or 2 ohms  
(whichever is greater)

#### Contact Resistance Variation

.....1% or 3 ohms max.  
(whichever is greater)

#### Adjustability

Voltage .....±0.05%

Resistance .....±0.15%

Resolution.....Infinite

Insulation Resistance .....500 vdc.  
1,000 megohms min.

#### Dielectric Strength

Sea Level .....900 vac

80,000 Feet .....350 vac

Adjustment Angle .....240° nom.

### Environmental Characteristics

#### Power Rating (300 volts max.)

70°C .....0.50 watt

125°C .....0 watt

#### Temperature Range

.....-55°C to +125°C

#### Temperature Coefficient

.....±100ppm/°C

Seal Test .....85°C Fluorinert\*

Humidity.....MIL-STD-202 Method 103  
96 hours

(2% ΔTR; 10 Megohms IR)

Vibration.....30G (1% ΔTR; 1% ΔVR)

Shock.....100G (1% ΔTR; 1% ΔVR)

#### Load Life

.....1,000 hours 0.5 watt @ 70°C  
(3% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)

Rotational Life .....200 cycles

(4% ΔTR; 3% or 3 ohms,  
whichever is greater, CRV)

### Physical Characteristics

Mechanical Angle .....270° nom.

Torque .....3.0 oz-in. max.

Stop Strength .....7.0 oz -in. min.

Terminals .....Solderable pins

Weight .....0.02 oz.

Marking .....Resistance code,  
terminal numbers, manufacturer's  
model number, style  
and date code

Wiper .....Positioned at 50% nominal


Flammability .....U.L. 94V-0

Standard Packaging .....50 pcs. per tube


Adjustment Tool .....H-90

\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.


### Common Dimensions Top Adjust

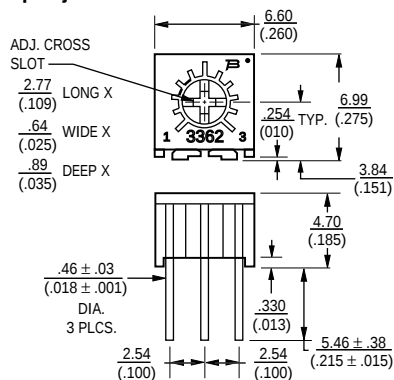


### 3362H




### 3362P



### 3362R




### 3362U




TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)


### Common Dimensions Side Adjust

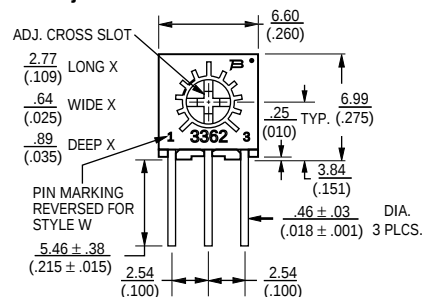


### 3362M





### 3362S



### 3362W



### 3362X



Specifications are subject to change without notice.

3362 - 1/4" Square Trimming Potentiometer

**BOURNS®**

How to Order

**3362 P - 1 - 502**


Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Consult factory for other available options.

Standard Resistance Table

| Resistance<br>(Ohms) | Resistance<br>Code |
|----------------------|--------------------|
| 10                   | 100                |
| 20                   | 200                |
| 50                   | 500                |
| <b>100</b>           | <b>101</b>         |
| <b>200</b>           | <b>201</b>         |
| <b>500</b>           | <b>501</b>         |
| <b>1,000</b>         | <b>102</b>         |
| <b>2,000</b>         | <b>202</b>         |
| <b>5,000</b>         | <b>502</b>         |
| <b>10,000</b>        | <b>103</b>         |
| <b>20,000</b>        | <b>203</b>         |
| <b>25,000</b>        | <b>253</b>         |
| <b>50,000</b>        | <b>503</b>         |
| <b>100,000</b>       | <b>104</b>         |
| 200,000              | 204                |
| 250,000              | 254                |
| 500,000              | 504                |
| 1,000,000            | 105                |
| 2,000,000            | 205                |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

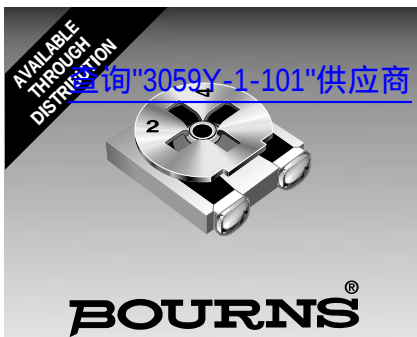

## Features

- SMD Single-Turn / Cermet / Industrial Open Frame
- Cross slot rotor designs suitable for automatic adjustment equipment
- Supplied in 12mm embossed tape, compatible with automatic pick-and-place assembly equipment

- Recommended for reflow solder processing only

## 3364 - 4mm Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range

.....100 ohms to 1 megohm  
(see standard resistance table)

Resistance Tolerance .....±25% std.

End Resistance

<1K .....20 ohms max.

>1K .....2%

Contact Resistance Variation

(Voltage Divider) .....5% max.

Resolution .....Infinite

Adjustment Angle .....260°±20°

### Environmental Characteristics

Power Rating (50 volts max.)

70°C .....0.2 watt

Temperature Range

.....-40°C to +125°C

Temperature Coefficient

.....±250ppm/°C

Humidity .....500 hours (5% ΔTR)

Load Life .....500 hours

0.2 watt @ 70°C (5% ΔTR)

Rotational Life .....20 cycles (15% ΔTR)

### Physical Characteristics

Torque .....20 to 200g-cm

Mechanical Angle .....Continuous

Marking .....Resistance code,

manufacturer's full part number

and date code on packaging

Terminals .....Solder coated

Standard Packaging

.....1000 pcs./7" reel

Adjustment Tool .....H-90

Reflow solder processing recommended

### How To Order

**3364 X - 1 - 103 E**

Model

Style

Orientation of parts in tape:

Styles W,A

Terminals toward sprocket holes

Styles X,B

Terminals away from sprocket holes

Standard Product

Resistance Code

Embossed Tape Designator

E = 1000 pcs./7" reel (-1 standard)




G = 5000 pcs./14.5" reel (-1 optional)

Consult factory for other available options.



### Common Dimensions

3364W, X

3-Terminal

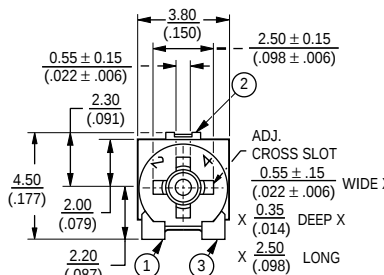

### SUGGESTED PWB LAYOUT






TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC (INCHES)

### 3364A, B

3-Terminal



### SUGGESTED PWB LAYOUT




SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

3364 - 4mm Square Trimming Potentiometer

**BOURNS®**

Packaging Specifications

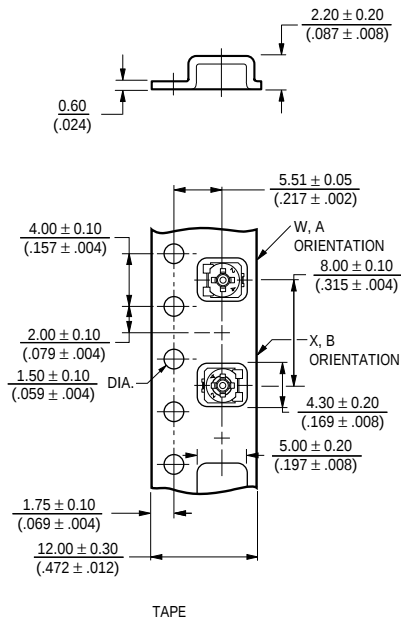

Standard Resistance Table

| Resistance (Ohms) | Resistance Code | Part Marking |
|-------------------|-----------------|--------------|
| <b>100</b>        | <b>101</b>      | <b>12</b>    |
| <b>200</b>        | <b>201</b>      | <b>22</b>    |
| <b>500</b>        | <b>501</b>      | <b>52</b>    |
| <b>1,000</b>      | <b>102</b>      | <b>13</b>    |
| <b>2,000</b>      | <b>202</b>      | <b>23</b>    |
| <b>5,000</b>      | <b>502</b>      | <b>53</b>    |
| <b>10,000</b>     | <b>103</b>      | <b>14</b>    |
| <b>20,000</b>     | <b>203</b>      | <b>24</b>    |
| <b>50,000</b>     | <b>503</b>      | <b>54</b>    |
| <b>100,000</b>    | <b>104</b>      | <b>15</b>    |
| 200,000           | 204             | 25           |
| 500,000           | 504             | 55           |
| 1,000,000         | 105             | 16           |

Popular values listed in boldface. Special resistances available.

Conforms with EIA specification RS-481.



## Features

- Surface Mount / Single-Turn Cermet / Process Sealed
- Elastomer seal allows multiple adjustments (5 rotations)
- Compatible with all surface mount manufacturing processes
- Recommended for reflow processing only

- Cross-slot rotor design suitable for automatic adjustment equipment
- Supplied in 12mm embossed tape, compatible with automatic pick-and-place assembly equipment
- Patent #5,095,298
- Plastic rotor minimizes RF & ESD concerns

## 3374 - 4mm Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±20% std.  
End Resistance.....1% or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
.....3% or 3 ohms max.  
(whichever is greater)  
Resolution.....Infinite  
Adjustment Angle .....240° nom.  
Maximum Voltage .....200V

### Environmental Characteristics

Power Rating  
70°C.....0.25 watt  
125°C.....0 watt  
Operating Temperature Range  
.....-55°C to +125°C  
Temperature Coefficient  
<500K ohms.....±100ppm/°C  
≥500K ohms.....±150ppm/°C  
Seal .....5 turns min.  
Humidity .....MIL-STD 202 Method 103  
Vibration .....20G; TRS ±1%, VRS ±1%  
Shock .....100G; TRS ±1%, VRS ±1%  
Load Life (@70°C Rated Power,  
1000 hours).....TRS ±3%  
Rotational Life .....100 cycles; TRS ±3%  
Thermal Shock.....5 cycles  
TRS ±2%, VRS ±1%






### Physical Characteristics

Torque.....18 - 180gm/cm  
Mechanical Angle .....Continuous  
Marking .....Manufacturer's trademark  
and part marking code  
Wiper .....Positioned at 50% nominal  
Standard Packaging .....750 pcs./7" reel  
Adjustment Tool .....H-90

### How To Order

Model **3374 X - 1 - 502 E**  
Style \_\_\_\_\_  
Orientation of Parts in Tape:  
Style W - Terminals Toward  
Sprocket Holes  
Standard or Modified  
Product Indicator  
-1 = Standard Product  
Resistance Code \_\_\_\_\_  
Embossed Tape \_\_\_\_\_  
750 pcs./7" reel (standard)  
Consult factory for other available options.



### 3374X/W



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC (INCHES)

### Packaging Specifications

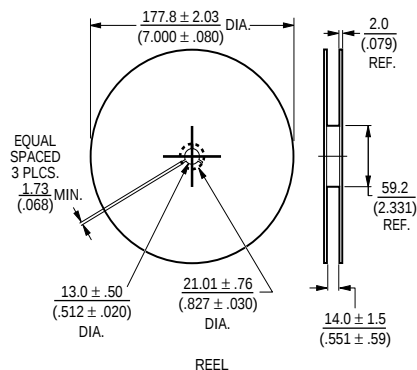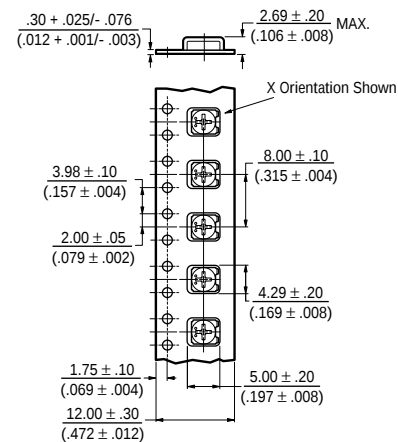

Meets EIA 481


### Standard Resistance Table

| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 10                | A1                | 100             |
| 20                | 21                | 200             |
| 50                | 51                | 500             |
| <b>100</b>        | <b>A2</b>         | <b>101</b>      |
| <b>200</b>        | <b>22</b>         | <b>201</b>      |
| <b>500</b>        | <b>52</b>         | <b>501</b>      |
| <b>1,000</b>      | <b>A3</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>A4</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| <b>50,000</b>     | <b>54</b>         | <b>503</b>      |
| <b>100,000</b>    | <b>A5</b>         | <b>104</b>      |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | A6                | 105             |
| 2,000,000         | 26                | 205             |

Popular values listed in boldface. Special resistances available.

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

Specifications are subject to change without notice.

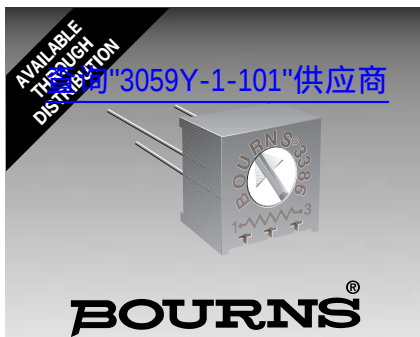

## Features

- Single Turn / Cermet / Industrial / Sealed
- Available on tape and reel (see page 71 for details)
- Available with a knob for finger adjust
- Available with extended shaft
- Available with cross-slot rotor

- Top and side adjust types (F, P, H, W, X most popular)
- High voltage types available (see page 61 for details)

## 3386 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±10% std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....2 ohms max.  
Contact Resistance Variation .....2% or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.05%  
Resistance .....±0.15%  
Resolution.....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet .....350 vac  
Adjustment Angle .....280° nom.

### Environmental Characteristics

Power Rating (300 volts max.)  
85°C .....0.5 watt  
125°C .....0 watt  
Temperature Range .....-55°C to +125°C  
Temperature Coefficient .....±100ppm/°C  
Seal Test .....85°C Fluorinert\*  
Humidity.....MIL-STD-202 Method 103  
96 hours  
(2% ΔTR, 10 Megohms min.)  
Vibration.....30G (1% ΔTR; 1% ΔVR)  
Shock.....100G (1% ΔTR; 1% ΔVR)  
Load Life .....1,000 hours 0.5 watt @ 70°C  
(3% ΔTR; 1% or 1 ohm, whichever is greater, CRV)  
Rotational Life .....200 cycles  
(4% ΔTR; 1% or 1 ohm, whichever is greater, CRV)


### Physical Characteristics

Mechanical Angle .....310° nom.  
Torque .....5.0 oz-in. max.  
Stop Strength .....15.0 oz-in. min.  
Terminals .....Solderable pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style  
Standard Packaging .....50 pcs. per tube  
Wiper Positioned at 50% Nominal  
Adjustment Tool .....H-90


\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.

Specifications are subject to change without notice.


### Common Dimensions Side Adjust

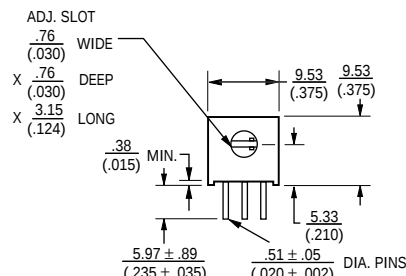


3386B




3386C




3386H




3386J




3386S



3386W



3386X



### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Special resistances available.

### How To Order

3386 P - 1 - 103 T

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Standard or Modified \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
-1 = Standard Product  
-EY5 = Extended Shaft  
Resistance Code \_\_\_\_\_  
Optional Suffix Letter \_\_\_\_\_  
T = Knob

Consult factory for other available options.

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED


DIMENSIONS ARE: METRIC  
(INCHES)

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.


# 3386 - 3/8" Square Trimming Potentiometer

**BOURNS®**


## Common Dimensions Top Adjust

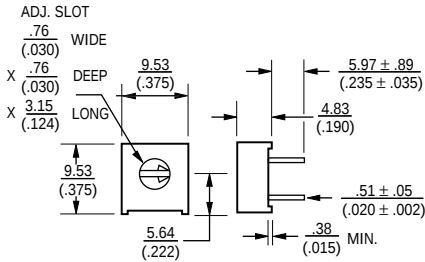


### 3386F




### 3386K





### 3386M




### 3386P




### 3386R




### 3386T




### 3386U




### 3386Y




### 3386G

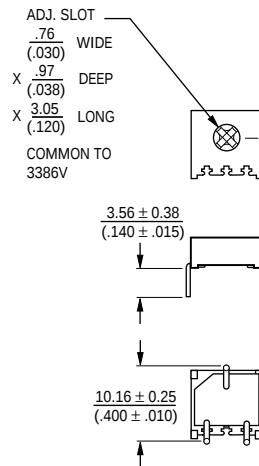


### 3386V

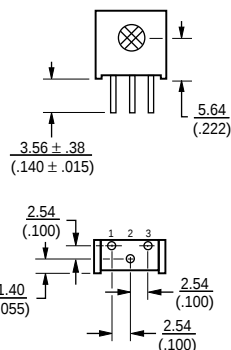


### 3386H-EY5 3386X-EY5 - SHOWN

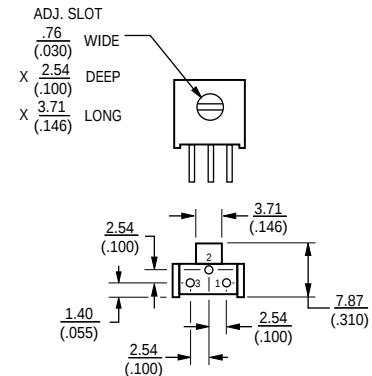

### 3386P-EY5




The Model 3386 is available with a knob for finger adjustment. Add suffix letter "T" to order code for F, P and X terminal styles.

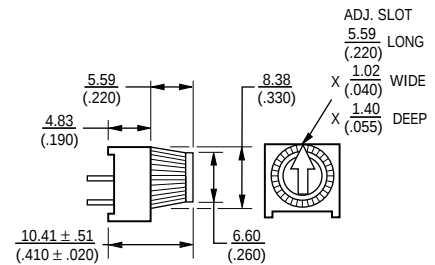

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- 3/8" Square / Single-Turn / Cermet Industrial / Sealed High Voltage Focus Control
- Designed for electrostatic focus control applications on monochrome or color CRTs

- Rated at 1KV D.C. and 600 VDC input voltage
- High stability cermet element
- Available with optional red knob

## 3386 HV2/3386 HV3 - 3/8" Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....2.5 and 5 megohms  
Resistance Tolerance .....±20%  
Contact Resistance Variation .....2% max.  
Adjustability  
Voltage Divider .....±0.05%  
Rheostat .....±0.15%  
Resolution .....Infinite  
Insulation Resistance @ 1KV D.C.  
.....1,000 megohms min.  
Dielectric Strength (5,000 foot altitude)  
.....1.5 KV A.C. min.  
Adjustment Angle .....280° nom.


### Environmental Characteristics

HV2 Input Voltage  
85°C .....(1 KVDC max.)  
125°C .....0 watt  
HV3 Input Voltage  
85°C .....(600 VDC max.)  
125°C .....0 watt  
Temperature Range  
.....-55°C to +125°C  
Temperature Coefficient  
.....±400ppm/°C  
Humidity .....MIL-STD-202 Method 103  
240 Hours (100 megohms min. IR)  
Load Life  
HV2 .....1,000 hours 1 KVDC  
60°C, 90% R.H. (3% max. ΔTR)  
HV3 .....1,000 hours 600 VDC  
60°C, 90% R.H. (3% max. ΔTR)  
Voltage Breakdown  
(5,000 foot altitude) .....1.5 KV min.  
Seal Test .....85°C Fluorinert\*  
Vibration .....No discontinuity 30G  
Shock .....No discontinuity 100G  
Rotational Life .....200 cycles min.


### Physical Characteristics

Mechanical Angle .....310° nom.  
Torque .....5.0 oz-in. max.  
Stop Strength .....15.0 oz-in. min.  
Terminals .....Solderable pins  
Weight .....0.04 oz.  
Marking .....Manufacturer's  
trademark, resistance code,  
wiring diagram, date code,  
manufacturer's model  
number and style  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Adjustment Tool .....H-90


### 3386N Common Dimensions

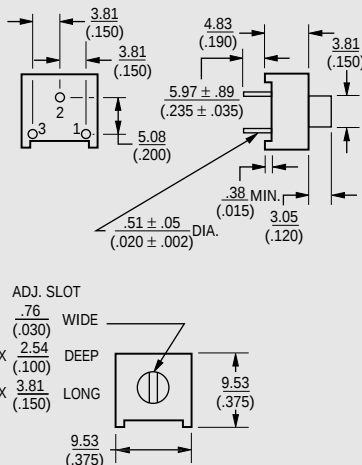


### 3386U

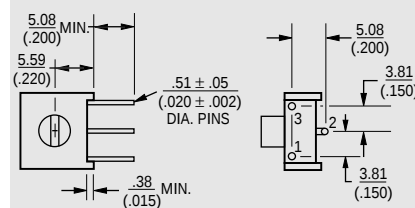

### Typical Focus Control Circuits

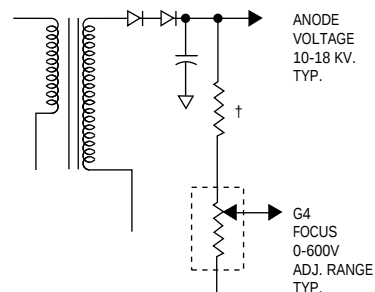

† VALUES DETERMINED BY CIRCUIT VOLTAGES

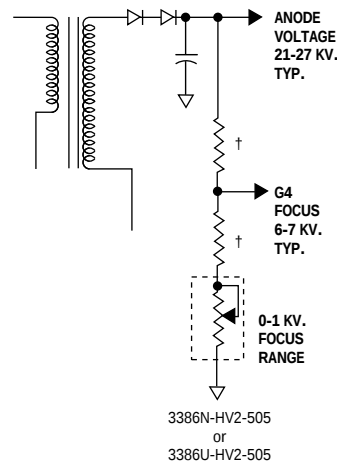


COLOR

### How To Order

**3386 N - HV2 - 505 T**

Model \_\_\_\_\_  
Style \_\_\_\_\_  
High Voltage Construction Indicator  
HV2 = 1000 VDC  
HV3 = 600 VDC  
Resistance Code \_\_\_\_\_  
-255 = 2.5 megohms  
-505 = 5 megohms  
Optional Suffix Letter  
T = Red Knob




TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: METRIC  
(INCHES)

SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.


\*\*"FLUORINERT" IS A REGISTERED TRADEMARK OF 3M CO.



- Single-Turn / Cermet / Industrial / Sealed
- Designed for operational amplifier offset voltage adjustment applications
- Reduces power supply drift errors
- Unique center tapped trimming potentiometer

Specifications are subject to change without notice.

查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- High temperature plastic rotor
- Recommended for reflow processing
- Rotor design compatible with pick and place and automatic adjustment equipment
- Supplied in 8mm embossed tape, compatible with automatic assembly equipment
- Cermet element

## Applications

- Car radios
- Color printers
- Cordless telephones
- CCD Camera control modules
- LCD modules

# TC03 - Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range .....100 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±25% std.  
Absolute Minimum Resistance  
≤ 1K Ohms.....20 ohms max.  
>1K Ohms .....2% max. of TR  
Contact Resistance Variation  
.....5% max.  
Resolution.....Infinite  
Adjustment Angle.....270° ±20°

## Environmental Characteristics

Resistance to Soldering Heat  
.....260°C, 10 seconds, TRS max. 5%  
Power Rating (50 VDC max.)  
70°C .....0.10 watt  
Temperature Range  
.....-40°C to +85°C  
Temperature Coefficient  
.....±250ppm/°C  
Humidity .....95%RH  
500 hours  
TRS max. ....±5%  
Load Life  
.....@ 70°C rated power 500 hours  
Rotational Cycling.....20 turns  
TRS ±15%

## Physical Characteristics

Torque.....20-200g-cm max.  
Mechanical Angle .....Continuous  
Marking.....Part marking code  
Standard Packaging  
.....2000 pcs./7" reel


## How To Order

**TC03 X - 2 - 103 E**



Model \_\_\_\_\_  
Style \_\_\_\_\_  
Orientation of Parts  
In Tape:  
Style X: Terminals Away  
From Sprocket  
Holes  
Standard or Modified  
Product Indicator \_\_\_\_\_  
-2 = Cross Slot Rotor (Std. Product)  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator \_\_\_\_\_

Consult factory for other available options.

## TC03X-2 3mm Open Frame for Reflow Soldering 3-Terminal

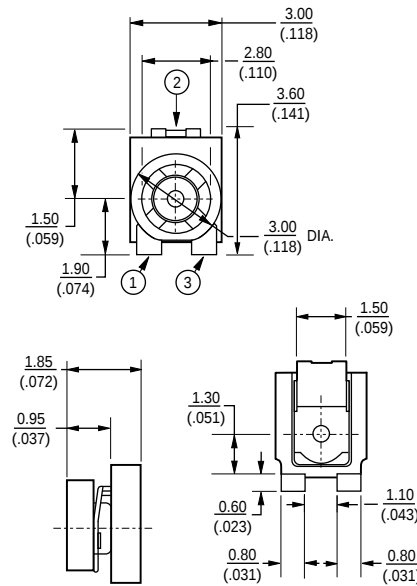

## SUGGESTED PWB LAYOUT




DIMENSIONS ARE: METRIC  
(INCHES)

## Standard Resistance Table

| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 100               | 12                | 101             |
| 200               | 22                | 201             |
| 500               | 52                | 501             |
| <b>1,000</b>      | <b>13</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>14</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| 50,000            | 54                | 503             |
| 100,000           | 15                | 104             |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | 16                | 105             |

Popular values listed in boldface.

查询"3059X-1-101"供应商



**BOURNS®**

## Features

- Recommended for reflow processing
- Rotor design compatible with pick and place and automatic adjustment equipment
- Supplied in 8mm embossed tape, compatible with automatic assembly equipment
- Carbon element

## Applications

- Audio car radios
- Satellite receivers - digital/analog
- Computer power supplies

# TC73 - Trimming Potentiometer

## Electrical Characteristics

Standard Resistance Range .....500 to 1 megohm  
(see standard resistance table)  
Resistance Tolerance .....±30% std.  
Absolute Minimum Resistance  
≤ 1K Ohms .....20 ohms max.  
> 1K Ohms .....2% max. of TR  
Contact Resistance Variation .....5% max.  
Resolution .....Infinite  
Adjustment Angle .....260° ±20°(-2)

## Environmental Characteristics

Resistance to Soldering Heat .....240°C, 20 seconds, TRS max. 5%  
Power Rating (50 VDC max.)  
50°C .....0.05 watt  
Temperature Range .....-25°C to +85°C  
Temperature Coefficient .....±250ppm/°C  
Humidity .....95%RH  
500 hours  
TRS max. ....+15% to -2%  
Load Life .....@ 50°C rated power 500 hours  
TRS ±5%  
Rotational Cycling .....20 turns  
TRS ±20%

## Physical Characteristics

Torque .....10-150g-cm max.  
Mechanical Angle .....Continuous; 260° ± 20°  
Marking .....Part marking code  
Standard Packaging .....2000 pcs./7" reel

## Soldering Process




Hand Soldering ....Soldering Iron of 20W  
or less controlled at 280°C for about 3  
sec. while applying solder  
Reflow Soldering .....Peak temperature  
or reflow oven should be  
set to 240°C max.

## Standard Resistance Table



| Resistance (Ohms) | Part Marking Code | Resistance Code |
|-------------------|-------------------|-----------------|
| 500               | 52                | 501             |
| <b>1,000</b>      | <b>13</b>         | <b>102</b>      |
| <b>2,000</b>      | <b>23</b>         | <b>202</b>      |
| <b>5,000</b>      | <b>53</b>         | <b>502</b>      |
| <b>10,000</b>     | <b>14</b>         | <b>103</b>      |
| <b>20,000</b>     | <b>24</b>         | <b>203</b>      |
| 50,000            | 54                | 503             |
| 100,000           | 15                | 104             |
| 200,000           | 25                | 204             |
| 500,000           | 55                | 504             |
| 1,000,000         | 16                | 105             |

Popular values listed in boldface.

TC73X/W-2

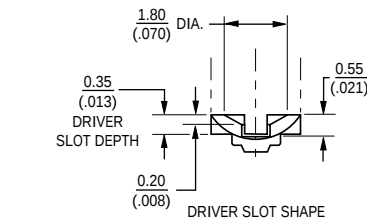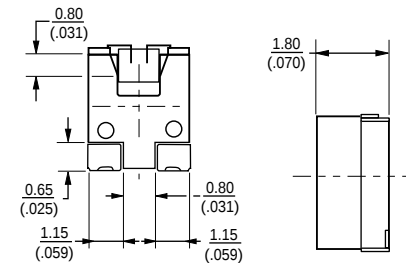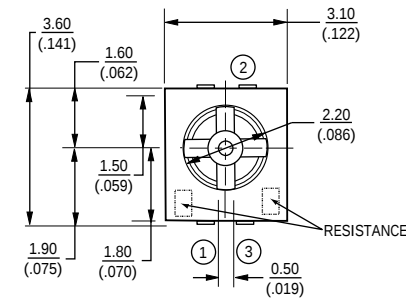

SUGGESTED PCB LAYOUT

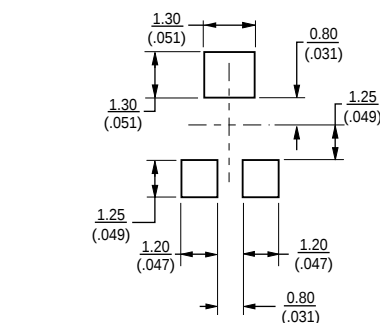

DIMENSIONS ARE: METRIC (INCHES)


## How To Order

TC73 X - 1 - 103 E

Model \_\_\_\_\_  
Style \_\_\_\_\_  
Orientation of Parts \_\_\_\_\_  
In Tape: \_\_\_\_\_  
Style X: Terminals Away From Sprocket Holes  
Style W: Terminals in direction to sprocket holes (preferred)  
Standard or Modified \_\_\_\_\_  
Product Indicator \_\_\_\_\_  
1 = Mechanical rotation stop (preferred)  
2 = Continuous  
Resistance Code \_\_\_\_\_  
Embossed Tape Designator \_\_\_\_\_  
E = 2000 pcs. per reel, 8mm tape

Consult factory for other available options.

查询"3059Y-1-101"供应商



**BOURNS®**

## Features

- Dust-resistant enclosure
- Polyester substrate
- Available on tape and reel for automatic insertion or in bulk for manual assembly
- Adjustable front/back, top/bottom
- Cross slot rotor design suitable for automatic adjustment equipment

## Applications

- Power supplies
- Cordless phones
- Printer
- Television sets
- Audio equipment

# TC76 - 6mm Carbon Trimming Potentiometer

## Electrical Characteristics

|                                   |                     |
|-----------------------------------|---------------------|
| Taper                             | Linear              |
| Standard Resistance Range         | 100 ohms – 1megohm  |
| Resistance Tolerance              | ±30%                |
| Maximum Voltage                   | 100VDC              |
| Standard Nominal Resistance Value | See table           |
| Residual Resistance               | ≤ 2% (min. 10 ohms) |
| Equivalent Noise Resistance       | ≤ 5%                |

## Environmental Characteristics

|                          |                                  |
|--------------------------|----------------------------------|
| Power Rating             | 0.1 Watt @ 40°C                  |
| Operating Temperature    | -25°C to 70°C                    |
| Load Life                | 1000 hours @ 40°C; 0.1W; ±10%    |
| Mechanical Life (Cycles) | 100 @ 10CPM; ±3% (Rn<1M)         |
| Temperature Coefficient  | ±300ppm                          |
| Thermal Cycling          | 16 hours @ 85°C; 2h @ -25°C; ±5% |
| Damp Heat                | 500 hours @ 40°C @ 95% HR; ±5%   |
| Vibration                | 2 hours @ 20g @ 10Hz...50Hz; ±2% |

## Physical Characteristics

|                   |              |
|-------------------|--------------|
| Mechanical Angle  | 280° ±10°    |
| Electrical Angle  | 245° ±25°    |
| Rotational Torque | 0.2 to 3 Ncm |
| Stop-End Strength | >3.5 Ncm     |

## How to Order

**TC76 B - 1 - 102**

|                                     |       |
|-------------------------------------|-------|
| Model                               | _____ |
| Style                               | _____ |
| See drawings (B, Z preferred)       | _____ |
| Standard or Modified                | _____ |
| Product Indicator                   | _____ |
| -1 = Standard Product               | _____ |
| Resistance Code                     | _____ |
| Optional Packaging Designator       | _____ |
| (Standard = Bulk)                   | _____ |
| R = Tape & Reel (W, N, G)           | _____ |
| A = Ammo Pack - preferred (W, N, G) | _____ |


## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |


SHADED AREAS TYPICALLY NOT STOCKED BY DISTRIBUTORS AND NOT RECOMMENDED FOR NEW DESIGNS.

## Packaging Specifications


### R: Tape and Reel (W, N, G)

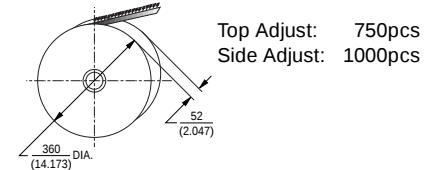

### A: Ammo Pack (W, N, G)

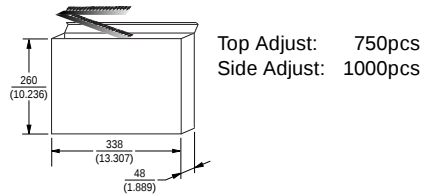


### Bulk (B, Z, P)





## Adjustment Details

### Top Adjust Styles G, N, P and Z

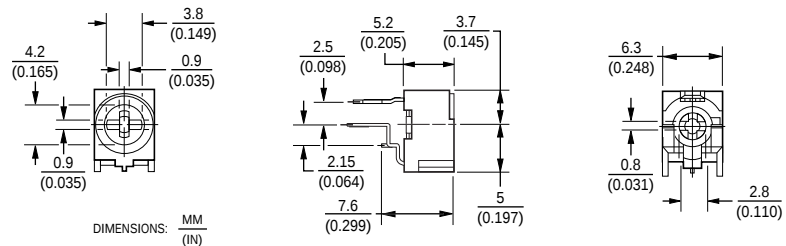


### Side Adjust Styles B and W

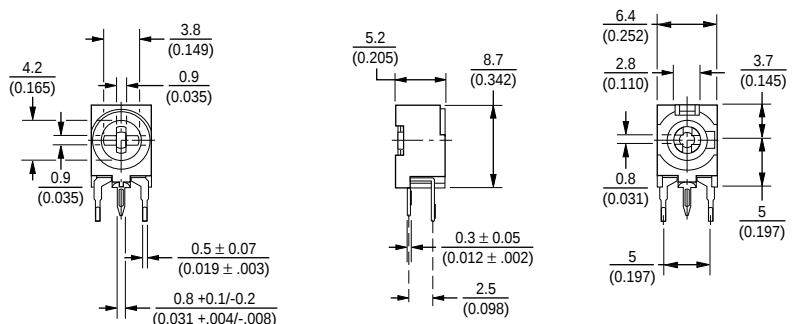


## TC76 - 6mm Carbon Trimming Potentiometer

### Taped Model TC76W

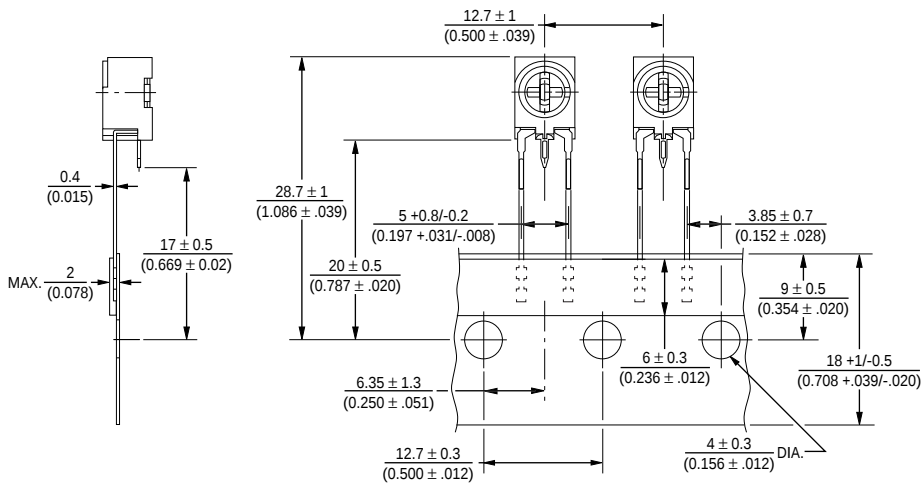


### PCB Layout

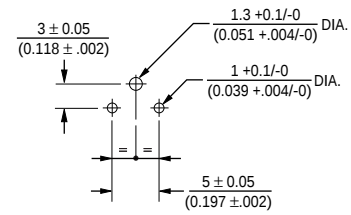


DIMENSIONS:  $\frac{\text{MM}}{(\text{IN})}$


### Taped Model TC76N (Preferred)

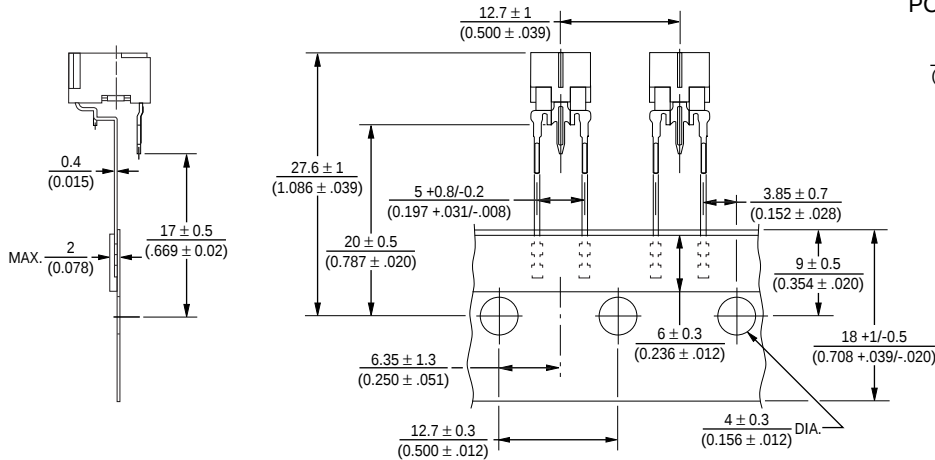


### PCB Layout

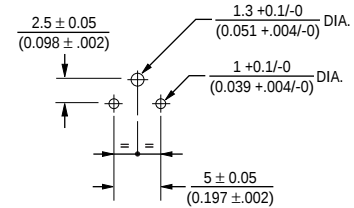

### Taped Model TC76G

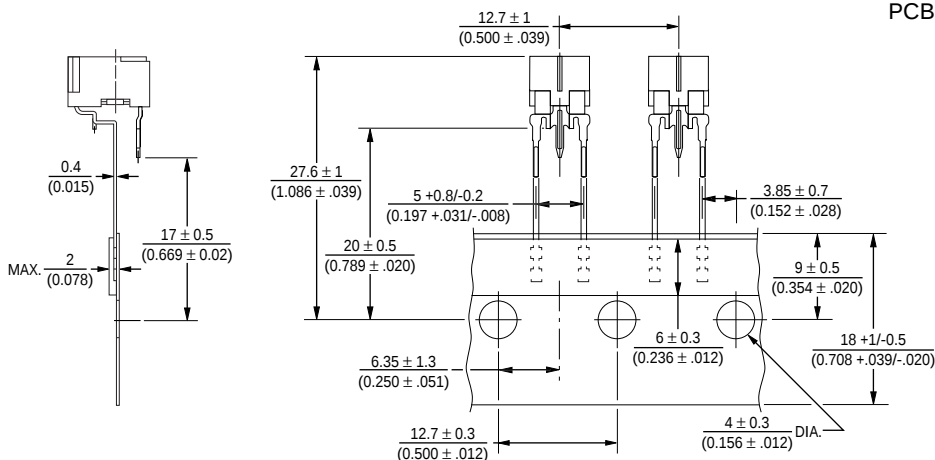


### PCB Layout

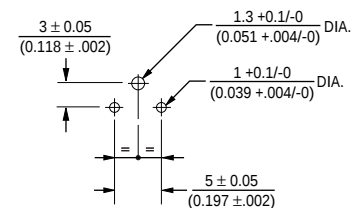


Specifications are subject to change without notice.

## TC76 - 6mm Carbon Trimming Potentiometer


**Through-hole Model TC76B preferred**

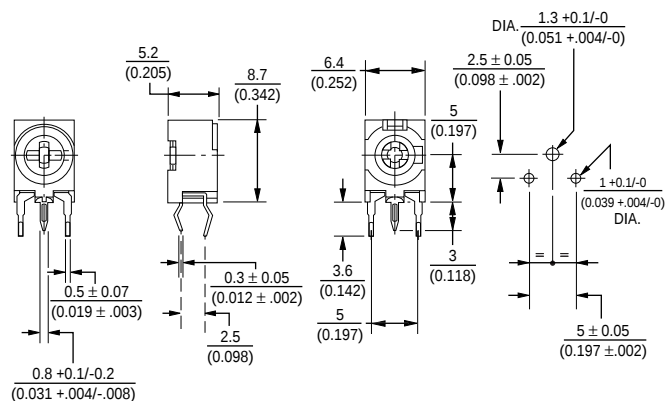


**Through-hole Model TC76Z preferred**

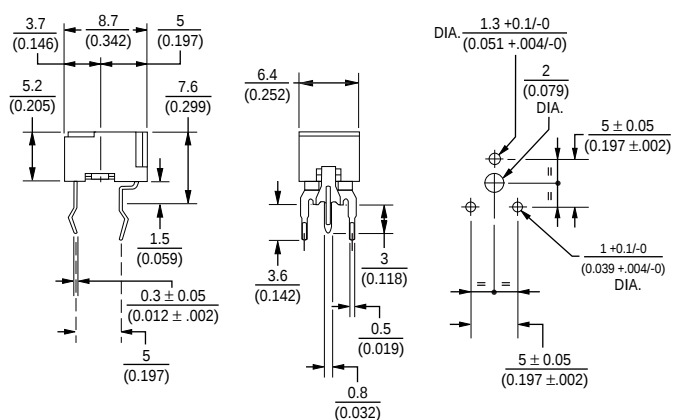

### Through-hole Model TC76P

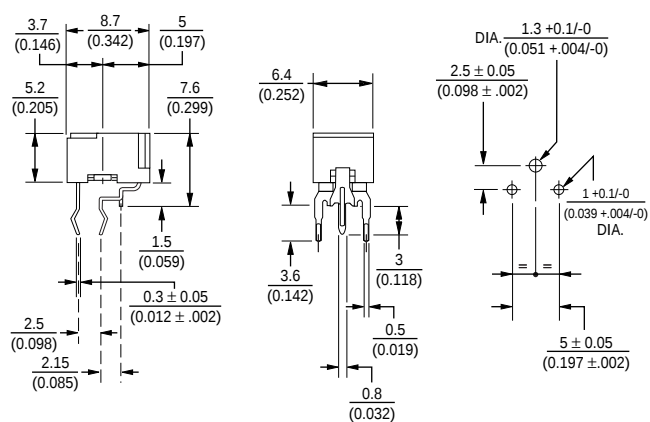

### Crimped Terminals detail



查询"3059Y-1-101"供应商

**BOURNS®**

## Features

- Dimensions of 6, 8 and 10mm
- Carbon element
- Open frame construction
- Vertical or horizontal adjustment

## Applications

- Television sets
- Low cost receivers

# TDB06/TDB08/TDB10 - Trimming Potentiometer

## Electrical Characteristics

Taper .....B (linear)  
 Standard Resistance Range  
 .....500 ohms to 1M ohm  
 (see standard resistance table)  
 Resistance Tolerance .....±30% std.  
 Nominal Resistance Value  
 .....See standard resistance table  
 Residual Resistance  
 .....Max. 100 ohms or ±5%

## Environmental Characteristics

Power Rating  
 TDB06 .....0.05 watt  
 TDB08/10 .....0.1 watt  
 Temperature .....+5% and -30%  
 resistance change  
 after 5 hours at 70°C  
 Load .....5% resistance change max.  
 after 3 hours rated load  
 Humidity ...15% resistance change max.  
 after 5 hours in 95% RH at 40°  
 Load Life...20% resistance change max.  
 after rated load for 350 hours in  
 90% RH at 40°

## Physical Characteristics

Mechanical Angle .....280° ± 20°  
 Rotational Torque .....20 - 300 gcm  
 Stop-End Strength .....0.5 kgcm min.  
 Mechanical Strength Base ...1 kgcm min.  
 Contact Force .....20g min.  
 Rotational Life .....15% resistance  
 change max. after 100  
 rotational life tests  
 Soldering Condition .....260°C max.  
 within 3 seconds



## How To Order

**TDB 08 - 3 103**


Model \_\_\_\_\_  
 Size \_\_\_\_\_  
 • 06 = 6.5mm  
 • 08 = 8mm  
 • 10 = 10mm  
 Pin/Housing Style \_\_\_\_\_  
 (Refer to drawing)  
 Resistance Code \_\_\_\_\_  
 (See table)

Consult factory for other available options.

TDB06-5  
 TDB08-5  
 TDB10-4



RECOMMENDED PCB LAYOUT

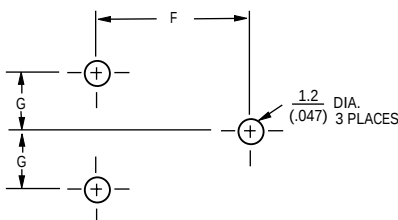


## Dimensions

|   | TDB-06-5                        | TDB-08-5                     | TDB-10-4                     |
|---|---------------------------------|------------------------------|------------------------------|
| A | 6.6<br>.260<br>7.2              | 8<br>.315<br>11              | 10<br>.394<br>15.3           |
| B | .283<br>3.6<br>.142             | .433<br>4<br>.157            | .602<br>7.3<br>.278          |
| C | 3<br>.118<br>3.8<br>.150<br>6.9 | 4<br>.157<br>4<br>.157<br>10 | 5<br>.197<br>4<br>.157<br>15 |
| D | .272<br>2.5<br>.089             | .394<br>2.5<br>.089          | .590<br>3.5<br>.138          |


## Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 500,000           | 504             |
| 1,000,000         | 105             |

TDB06-6  
 TDB08-3  
 TDB10-8

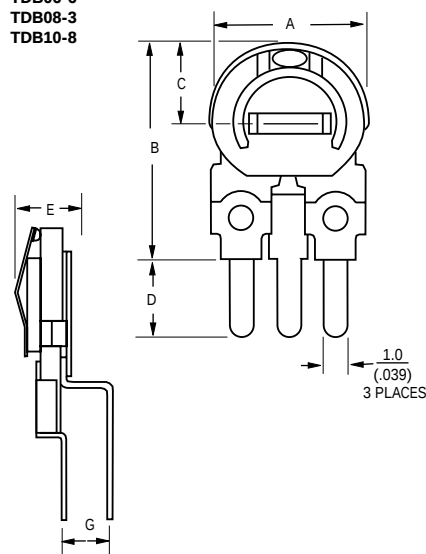

RECOMMENDED PCB LAYOUT



## Dimensions

|   | TDB-06-6                                  | TDB-08-3                              | TDB-10-8                              |
|---|-------------------------------------------|---------------------------------------|---------------------------------------|
| A | 6.6<br>.260<br>7.2                        | 8<br>.315<br>11                       | 10<br>.394<br>15.3                    |
| B | .283<br>3.6<br>.142                       | .433<br>4<br>.157                     | .602<br>7.3<br>.278                   |
| C | 3.5<br>.138<br>2.3<br>.090<br>2.5<br>.089 | 4<br>.157<br>3<br>.118<br>2.5<br>.089 | 7<br>.275<br>3.5<br>.138<br>1<br>.039 |
| D | .089<br>2.5<br>.089                       | .089<br>2.5<br>.089                   | .039<br>1<br>.039                     |
| E | .089<br>2.5<br>.089                       | .089<br>2.5<br>.089                   | .039<br>1<br>.039                     |
| F | .089<br>2.5<br>.089                       | .089<br>2.5<br>.089                   | .039<br>1<br>.039                     |
| G | .089<br>2.5<br>.089                       | .089<br>2.5<br>.089                   | .039<br>1<br>.039                     |
| H | .089<br>2.5<br>.089                       | .089<br>2.5<br>.089                   | .039<br>1<br>.039                     |





DIMENSIONS ARE: METRIC  
 (INCHES)

Specifications are subject to change without notice.

## Optional Products



**BOURNS®**

These optional trimmer products are not recommended for new designs. However, if you require technical specifications, contact a Bourns representative in your area.

| Model Number | Product                                                                             | Mounting      |              | Size             | Circuit Board Layout                                                                  |
|--------------|-------------------------------------------------------------------------------------|---------------|--------------|------------------|---------------------------------------------------------------------------------------|
|              |                                                                                     | Surface Mount | Through-Hole |                  |                                                                                       |
| 3005         |    |               | •            | 3/4" rectangular |    |
| 3009         |    |               | •            | 3/4" rectangular |    |
| 3082         |   |               | •            | 1/2" rectangular |   |
| 3345         |  |               | •            | 1/2" round       |  |
| 3373         |  | •             |              | 3mm square       |  |

| Model Number | Turns  |       | Sealing | Element Tech. | Resistance Range     | Power Rating                                            | Tolerance | Mechanical Turns | Adjust    | Temp. Range    |
|--------------|--------|-------|---------|---------------|----------------------|---------------------------------------------------------|-----------|------------------|-----------|----------------|
|              | Single | Multi |         |               |                      |                                                         |           |                  |           |                |
| 3005         |        | •     | Sealed  | Wirewound     | 10 ohms to 50K ohms  | 70°C - 1.0 watts<br>125°C - 0 watt                      | ±10%      | 20               | Side      | -65°C - +125°C |
| 3009         |        | •     | Sealed  | Cermet        | 10 ohms to 5 megohms | @ 400 volts max.<br>70°C - 0.75 watts<br>150°C - 0 watt | ±10%      | 15               | Side      | -55°C - +150°C |
| 3082         |        | •     | Sealed  | Cermet        | 10 ohms to 2 megohms | @ 400 volts max.<br>85°C - 0.3 watts<br>150°C - 0 watt  | ±10%      | 10               | Side      | -65°C - +150°C |
| 3345         | •      |       | Sealed  | Wirewound     | 10 ohms to 50K ohms  | 70°C - 1.0 watts<br>150°C - 0 watt                      | ±5%       | 1                | Top, Side | -55°C - +150°C |
| 3373         | •      |       | Sealed  | Cermet        | 10 ohms to 2M ohms   | 70°C - .125 watts<br>125°C - 0 watt                     | ±25%      | 1                | Top, Side | -55°C - +125°C |

[查询"3059Y-1-101"供应商](#)

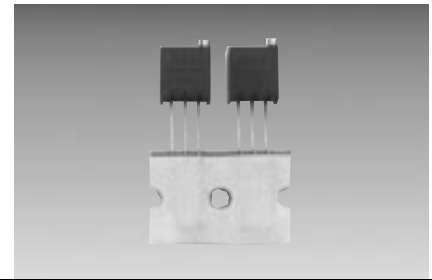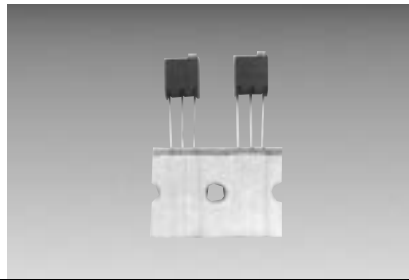

## Tape and Reel Packaging Specifications

**BOURNS®**

Now there is a full assortment of Trimpot® Potentiometer models on tape and reel or ammo pack packaging.

- These models are available taped and packaged per EIA Standard 468.
- All models have been tested for compatibility with popular radial insertion machine models on the market today.

### How To Order

**3362 M - 1 - 103 R**



Model \_\_\_\_\_  
 Style \_\_\_\_\_  
 Standard Product \_\_\_\_\_  
 Resistance Code \_\_\_\_\_  
 Tape & Reel \_\_\_\_\_  
 Designator: Use "R" for Tape & Reel  
 Use "A" for Ammo Pack





### 3266\*

Product specifications and standard resistance values, page 20.

#### SIDE ADJUST 3266Z-1-(RC)R

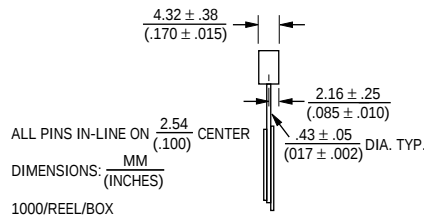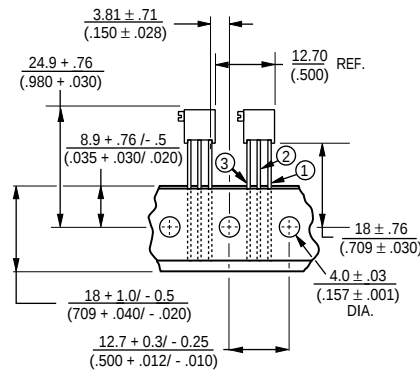



#### TOP ADJUST 3266Y-1-(RC)R

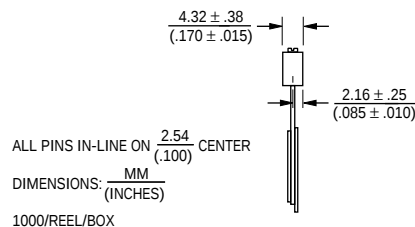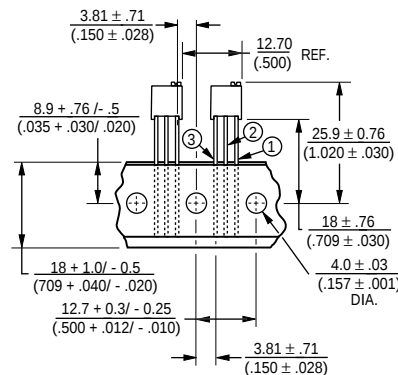



### 3296\*

Product specifications and standard resistance values, page 26.

#### SIDE ADJUST 3296X-1-(RC)R

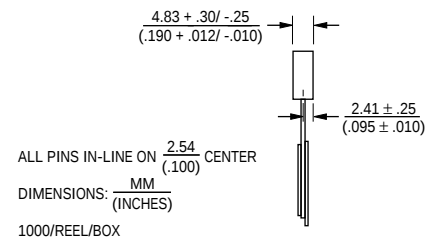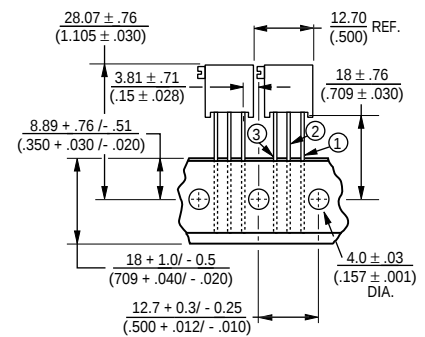

#### TOP ADJUST 3296W-1-(RC)R

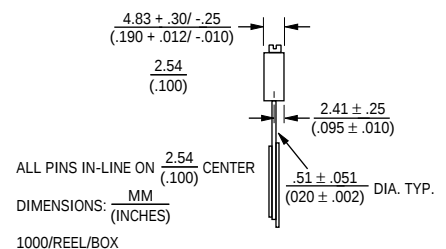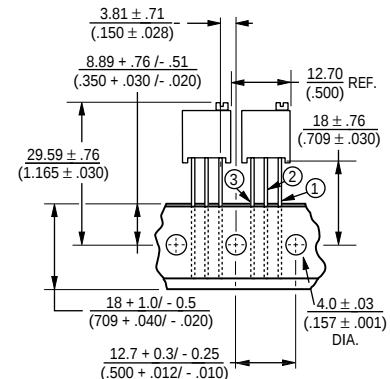

查询"3059Y41-101"供应商


## Tape and Reel Packaging Specifications

**BOURNS®**

### 3329


Product specifications and standard resistance values, page 51.

#### SIDE ADJUST 3329M-1-(RC)R

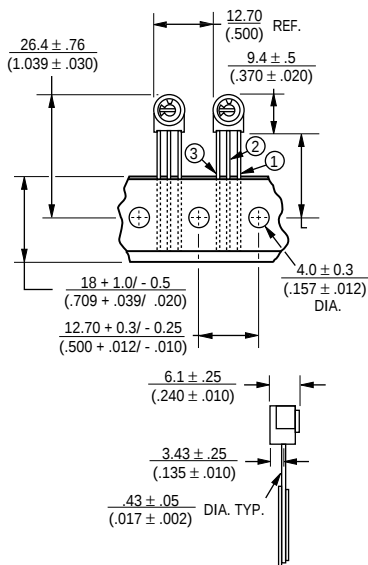

ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
1000/REEL/BOX

#### TOP ADJUST 3329U-1-(RC)R

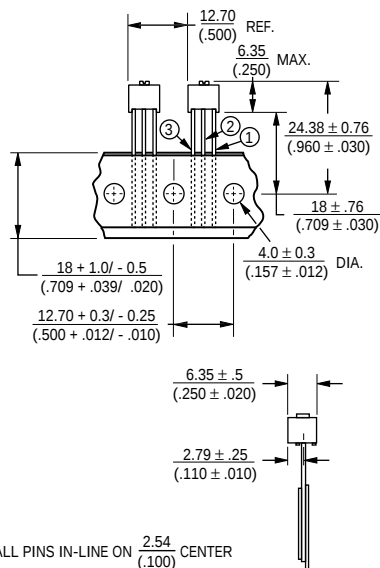


ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
1000/REEL/BOX

### 3362


Product specifications and standard resistance values, pages 54 & 55.

#### SIDE ADJUST 3362M-1-(RC)R

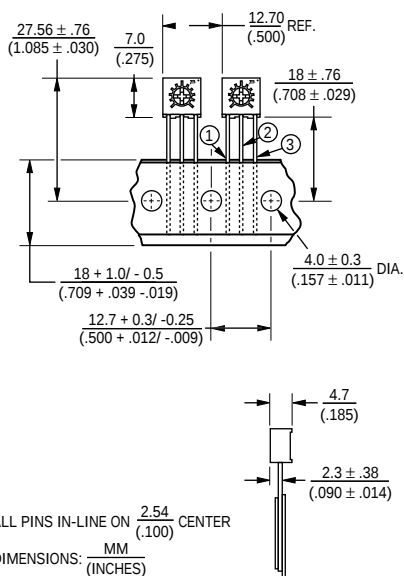

ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
1000/REEL/BOX

#### TOP ADJUST 3362U-1-(RC)R

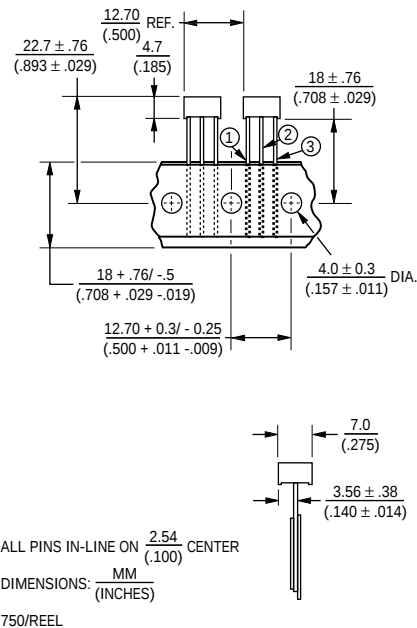


ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
750/REEL

### 3386


Product specifications and standard resistance values, pages 59 & 60.

#### SIDE ADJUST 3386W-1-(RC)R


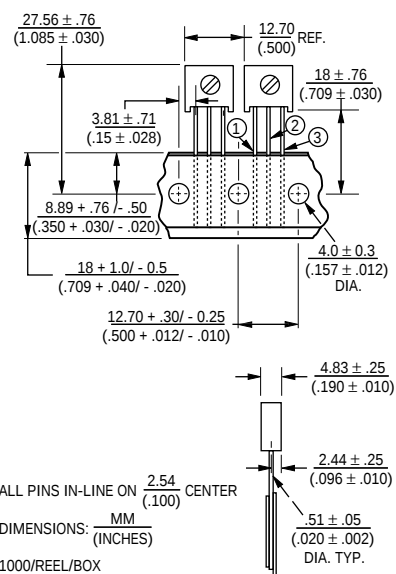


ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
1000/REEL/BOX

#### TOP ADJUST 3386U-1-(RC)R

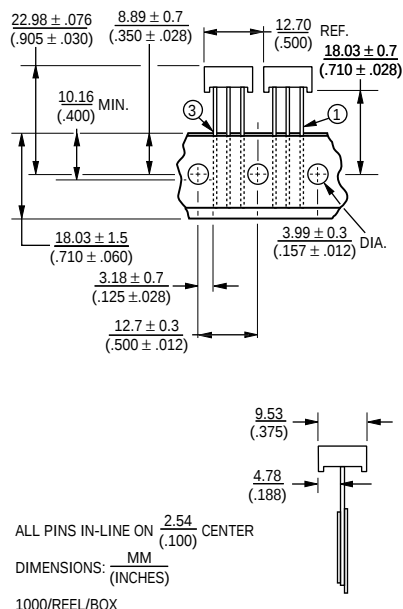

ALL PINS IN-LINE ON 2.54 (1.00) CENTER  
DIMENSIONS: MM (INCHES)  
1000/REEL/BOX

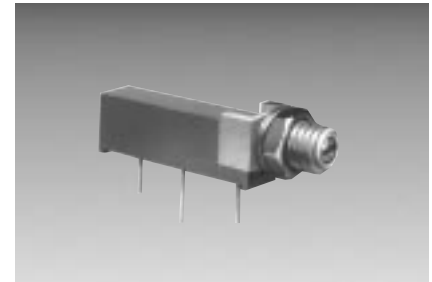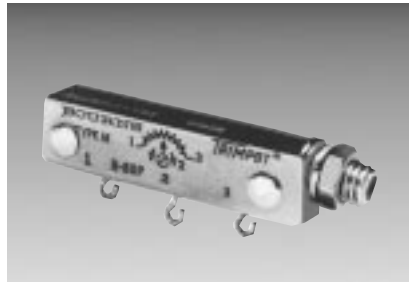

## Factory Installed Panel Mount

**BOURNS®**

### TRIMPOT® POTENTIOMETER PANEL MOUNTING OPTIONS AND HARDWARE

Many Trimpot® Potentiometers are available for panel mount application.

This product option provides for maximum design flexibility.

To order Trimpot® Potentiometers with panel mount hardware attached by the factory, simply add an "M" or "Z" suffix to the Bourns part number per Table I, page 75.

Example:  
3006P-1-100Z

To order military Trimpot® Potentiometers with panel mount hardware attached by the factory, order the military part number and add "with panel mount attached."

Example:  
RT12C2PRC, with panel mount attached.




To order panel mounting accessories for customer installation, simply use the part number per Table II, page 75.

Example:  
H83P

NOTE: For complete product specifications, see catalog page for the trimmer model.

**Torque - Apply maximum 8 in. lbs. on mounting nut when mounted on panel.**




#### Models RT12/RJ12, 3057/3059

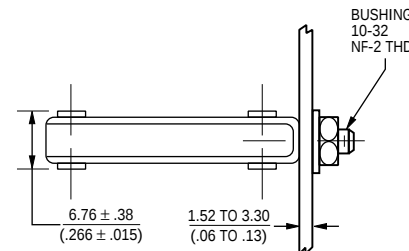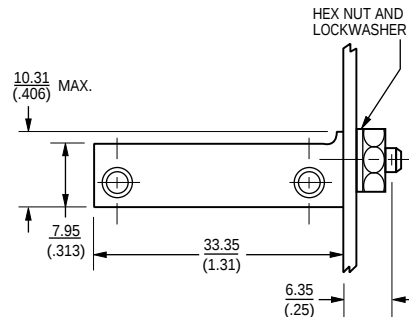

#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.
2. RECOMMEND PANEL HOLES. #10 DRILL  $\frac{.194}{(.008)}$

#### Models 3005/3006/3009

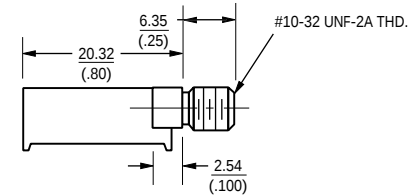

#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.
2. RECOMMEND PANEL HOLE SIZE #7 DRILL  $\frac{.200}{(.008)}$




[查询"3059Y-1-101"供应商](#)

## Factory Installed Panel Mount

**BOURNS®**

### Models 3292




X, L and W Styles



#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.

### Models RT22/RTR22/RJ22 3250/3252


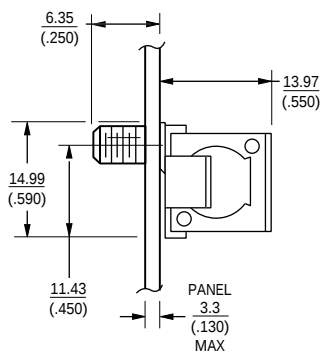



#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.

### Models RT24/RTR24/3290


H and W Styles - 3290 X & W Styles-RT24/RTR24



#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.

查询"3059Y-1-101"供应商

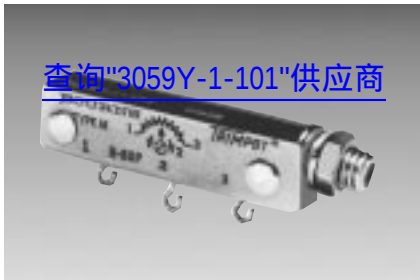




## Customer Installed Panel Mount - Unsealed

**BOURNS®**

SEE TABLE II (PAGE 75) FOR PANEL MOUNT PART NUMBER

### H-58P Panel Mount

1-1/4 Inch Rectangular  
Multiturn Modules

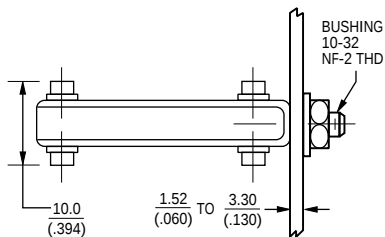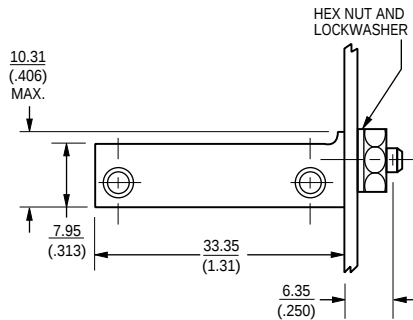




#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.
2. RECOMMEND PANEL HOLES. #10 DRILL  $\frac{.194}{(.008)}$

\*SPECIFY H82 IF PANEL SEAL IS REQUIRED.

### H-65P Panel Mount

1/2 Inch Square  
Multiturn Models






#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.
2. DRAWINGS SHOWN WITH TRIMMER. ORDER PART SEPARATELY

### H-83P Panel Mount

Adapter for Models 3005 AND 3006


The H-83P Adapter is used with Models 3005 (page 69) and 3006 (page 9). Order separately and simply snap fit the trimmer in the plastic case. The H-83P with lock-washer and mounting nut is available in 50-piece lots.

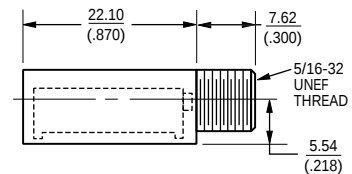

#### NOTES:

1. DRAWINGS SHOWN WITH TRIMMER. ORDER PART SEPARATELY

[查询"3059Y-1-101"供应商](#)






## Customer Installed Panel Mount

**BOURNS®**

### 3/8 Inch Square Multiturn Models

#### H-114P/115P/116P Panel Mount



#### NOTES:

1. PROVIDED WITH LOCKWASHER AND MOUNTING NUT.
2. DRAWINGS SHOWN WITH TRIMMER. ORDER PART SEPARATELY

TABLE I  
FACTORY INSTALLED PANEL MOUNTS


| STANDARD PART NO.      | PART NO. WITH PANEL MOUNT |
|------------------------|---------------------------|
| 3005P-1-(RC)           | 3005P-1-(RC) Z            |
| 3006P,Y, or W-1-(RC)   | 3006P,Y, or W-1-(RC) Z    |
| 3009P or Y-1-(RC)      | 3009P or Y-1-(RC) Z       |
| 3057L,J,P, or Y-1-(RC) | 3057L,J,P, or Y-1-(RC) M  |
| 3059L,J,P, or Y-1-(RC) | 3059L,J,P, or Y-1-(RC) M  |
| 3250L or W-1-(RC)      | 3250L or W-1-(RC) M       |
| 3252L or W-1-(RC)      | 3252L or W-1-(RC) M       |
| 3290 H or W-1-(RC)     | 3290H or W-1-(RC) M       |
| 3292L,W, or X-1-(RC)   | 3292L,W, or X-1-(RC) M    |

TABLE II  
RETRO-FIT PANEL MOUNTS FOR INSTALLATION BY CUSTOMER

| STANDARD PART NO.       | ORDER PANEL MOUNT PART NO. |
|-------------------------|----------------------------|
| 3005P-1-(RC)            | H-83P                      |
| 3006P,Y, or W-1-(RC)    | H-83P                      |
| 3057L,J,P, or Y-1-(RC)  | H-58P* SCREW ASSEMBLY      |
| 3059L,J,P, or Y-1-(RC)  | H-58P* SCREW ASSEMBLY      |
| 3250L, W, X-(RC)        | H-65P-1*                   |
| 3252L or W-1-(RC)       | H-65P-3*                   |
| 3252X-1-(RC)            | H-65P-5*                   |
| 3290 H or W-1-(RC)      | H-114P*                    |
| 3292L-1-(RC)            | H-115P*                    |
| 3292W OR X-1-(RC)       | H-116P*                    |
| RT12P,Y,L               | H-58P* SCREW ASSEMBLY      |
| RJ12L,P,Y               | H-58P* SCREW ASSEMBLY      |
| RT22L,W, X, RTR22L,W, X | H-65P-1*                   |
| RJ22L,W                 | H-65P-3*                   |
| RJ22X                   | H-65P-5*                   |
| RT24W / RTR24W OR X     | H-114P*                    |
| RJR24W OR X             | H-116P*                    |

\*Specify H-82 if panel seal is required.

[查询"3059Y-1-101"供应商](#)





## Hardware For Special Mounting Applications

**BOURNS®**

### H-82 Panel Seal

For all panel mounts with size 10-32 bushings.




To be used with the following to provide panel seal:

H-58P  
H-65P-1  
H-65P-3  
H-65P-5  
H-114P  
H-115P  
H-116P

### H-25/H-28 Stacking Straps




Models 3250, 3252 (H-25) and 3292 (H-28).




| DIMENSIONS | H-25            | H-28            |
|------------|-----------------|-----------------|
| A          | .236<br>(.093)  | .178<br>(.070)  |
| B          | .363<br>(.143)  | .318<br>(.125)  |
| C          | 1.321<br>(.520) | 1.064<br>(.419) |
| THICKNESS  | .51<br>(.02)    |                 |

### H-26S Side Bracket

Models 3250 and 3252  
This hardware is available for special mounting applications.



[查询"3059Y-1-101"供应商](#)




**BOURNS®**

## Features


- Meets UL 94V-0
- Pocket clip
- For use on most trimmer shafts/rotors
- Recessed end for use with extended shafts

## H-90/H-91 - Adjustment Tools

### H-90

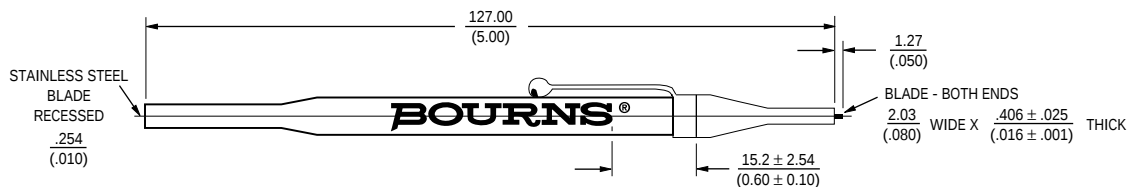

### H-91\*

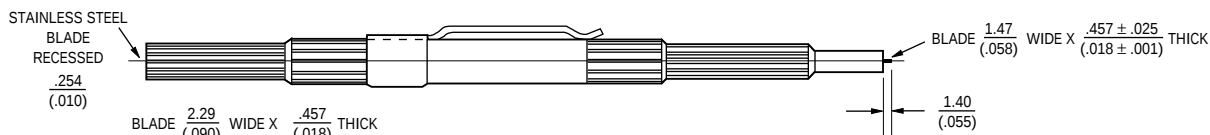

\*H-91 RECOMMENDED FOR USE WITH TRIMMER MODELS 3224 AND 3214.



- Wide assortment of popular trimmers
- Convenient, easy-to-use packaging
- Single-turn and multiturn styles
- Many configurations in both cermet and wirewound element types

## H-800 TrimBin™ Trimmer Lab Design Kit

A complete assortment of the most popular through-hole trimmer styles from Bourns Trimpot is contained in one convenient package. The kit contains 126 parts representing 50 varieties of resistances and pin styles.

Select the size, shape, type of element, and method of adjustment to suit your application.



- Full line of surface mount products
- Convenient, easy-to-use packaging
- Single-turn, multiturn, sealed, open-frame styles
- Popular styles and ohmic values

## H-814 Surface Mount Lab Design Kit

A complete assortment of the most popular surface mount products from Bourns Trimpot is contained in this convenient lab design kit. It contains 220 parts in popular styles and resistance values to help in your design selection.

Also included are complete performance parameters and specifications for each model in the kit. Plus, a convenient Adjustment Tool.

查询"3059Y-1-101"供应商




## Features

- High intensity Xenon beam
- Two tool tip sizes
- Red and blue/green vision aid lenses
- Approved for hazardous location use



## H-200 - Adjustment Tool with a Light

# TrimBeam™


Makes It Easy to See and Access  
Small Electronic Components

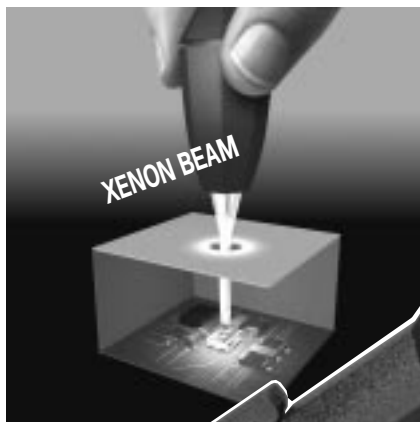


Twist the Head  
to Turn Light  
On/Off

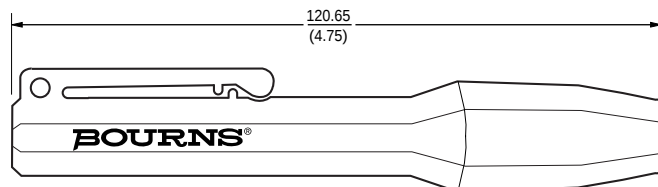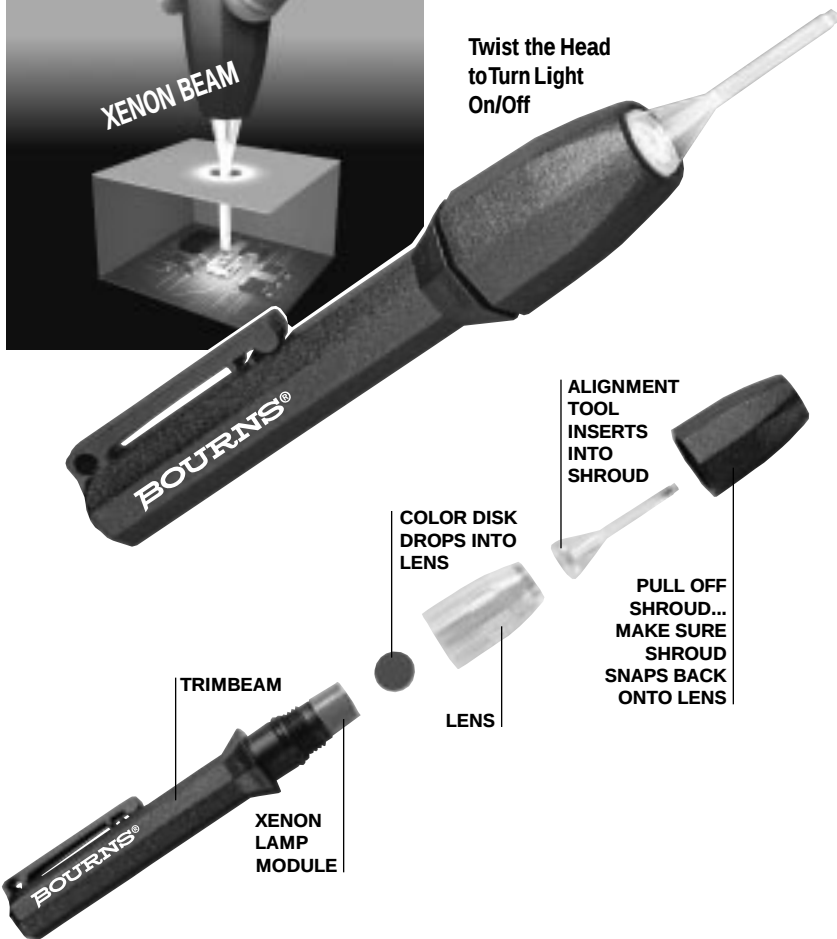

### NARROW TOOL TIP

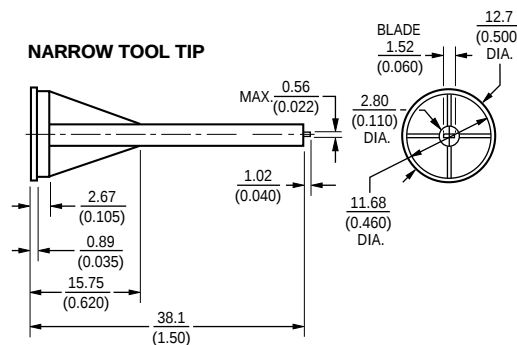

### WIDE TOOL TIP

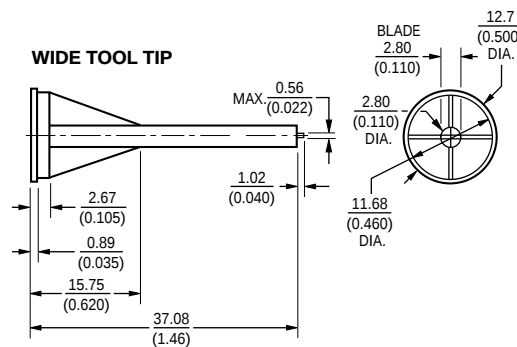

## Mil-Spec Numbering System - Defined

**BOURNS®**

### Non-Wirewound RJ Styles

**MIL-R-22097** **RJ24** **F** **W** **103**

Style \_\_\_\_\_

Characteristic \_\_\_\_\_

|                 |           |
|-----------------|-----------|
| T.C. Max.       | ±100PPM°C |
| C.R.V. Max.     | 1%        |
| Thermal Shock   | 1%        |
| Humidity        | 1%        |
| Shock           | 1%        |
| Vibration       | 1%        |
| Load Life       | 2%        |
| Low Temp.       | 1%        |
| High Temp.      | 2%        |
| Rotational Life | 2%        |

Terminal Type \_\_\_\_\_

Resistance Code \_\_\_\_\_

First Two Digits Significant  
Last Digit No. Of Zeros  
103 = 10,000 Ohms

### Non-Wirewound RJR Styles - High Reliability

**MIL-R-39035** **RJR24** **F** **W** **102** **P**

Style \_\_\_\_\_

Characteristic \_\_\_\_\_

|                 |           |
|-----------------|-----------|
| T.C. Max.       | ±100PPM°C |
| C.R.V. Max.     | 1%        |
| Thermal Shock   | 1%        |
| Humidity        | 1%        |
| Shock           | 1%        |
| Vibration       | 1%        |
| Load Life       |           |
| 2,000 Hrs.      | 3%        |
| 10,000 Hrs.     | 3%        |
| Low Temp.       | 1%        |
| High Temp.      | 3%        |
| Rotational Life | 2%        |
| Conditioning    | 1-1/2%    |

Terminal Type \_\_\_\_\_

Resistance Code \_\_\_\_\_

First Two Digits Significant  
Last Digit No. Of Zeros  
102 = 1,000 Ohms

Failure Rate \_\_\_\_\_

(% Failures/1,000 Hrs. — 60% Confidence)

M = 1.0%  
P = 0.1%  
R = .01%

### Wirewound RT Styles

**MIL-R-27208** **RT24** **C2** **P** **101**

Style \_\_\_\_\_

Characteristic \_\_\_\_\_

|   |                                           |
|---|-------------------------------------------|
| C | = Temp. Coeff. ±50 PPM/°C                 |
| 2 | = 85° Rating Temp., 150° Max. Oper. Temp. |

Terminal Type \_\_\_\_\_

Resistance Code \_\_\_\_\_

First Two Digits Significant  
Last Digit No. Of Zeros  
101 = 100 Ohms

### High-Rel Wirewound Specification MIL-R-39015 RTR Styles

This specification has a procedure for ordering, processing, and marking parts entirely different than the other three specifications. IT DOES NOT USE THE TYPE DESIGNATION NUMBER AS THE PART NUMBER.

THE NUMBER TO ORDER BY CONSISTS OF:

- The individual specification sheet number  
M39015/2 (FOR STYLE RTR22)  
M39015/3 (FOR STYLE RTR24)
- A dash number from the specification sheet table for the resistance value

|          |           |
|----------|-----------|
| M39015/2 | M39015/3  |
| -003 500 | - 006 500 |
| -004 1K  | - 007 1K  |
| -005 2K  | - 008 2K  |
| -006 5K  | - 009 5K  |
| -007 10K | - 010 10K |
| -008 20K |           |
- Terminal Type
- Failure rate level M  
M = 1%  
% FAILURE/1,000 Hrs. — 60% Confidence

### EXAMPLES OF PART NUMBERS

M39015/2 — **006LM**  
5K Term. Type L — Failure Rate M

M39015/3 — **010XM**  
10K Term. Type X — Failure Rate M

The table on the next page shows all part numbers covered by this specification, the conversion to the RTR type designation number required by the supplier to manufacture the part, and the number that will be marked on the units you receive (same as part number ordered but with the letter "J" in front of it). The letter "J" is a government mark and it is certification that the parts comply with the specification.

### INFORMATION NOTES

- M39015/3 WAS ADDED TO THE MIL-SPEC AFTER ITS ORIGINAL RELEASE.

## Mil-Spec Numbering System - How To Order

**BOURNS®**

### Bourns High Reliability Mil-Spec Part Numbers

| Order By                                                             | Process By*                                                 | Marked With                                                             | Terminal Types | Failure Rates |
|----------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------|----------------|---------------|
| M39015/2-003(TS)(FR)<br>M39015/2-004(TS)(FR)<br>M39015/2-005(TS)(FR) | RTR22D(TS)501(FR)<br>RTR22D(TS)102(FR)<br>RTR22D(TS)202(FR) | JM39015/2-003(TS)(FR)<br>JM39015/2-004(TS)(FR)<br>JM39015/2-005(TS)(FR) | L, P, W, X     | M             |
| M39015/2-006(TS)(FR)<br>M39015/2-007(TS)(FR)<br>M39015/2-008(TS)(FR) | RTR22D(TS)502(FR)<br>RTR22D(TS)103(FR)<br>RTR22D(TS)203(FR) | JM39015/2-006(TS)(FR)<br>JM39015/2-007(TS)(FR)<br>JM39015/2-008(TS)(FR) |                |               |
| M39015/3-006(TS)(FR)                                                 | RTR24D(TS)501(FR)                                           | JM39015/3-006(TS)(FR)                                                   | P, W, X        | M             |
| M39015/3-007(TS)(FR)<br>M39015/3-008(TS)(FR)                         | RTR24D(TS)102(FR)<br>RTR24D(TS)202(FR)                      | JM39015/3-007(TS)(FR)<br>JM39015/3-008(TS)(FR)                          | P, W, X        | M             |
| M39015/3-009(TS)(FR)<br>M39015/3-010(TS)(FR)                         | RTR24D(TS)502(FR)<br>RTR24D(TS)103(FR)                      | JM39015/3-009(TS)(FR)<br>JM39015/3-010(TS)(FR)                          |                |               |

\*May also order using this part number.

## Qualified Part Numbers

Bourns reserves the right per MIL-R-39035 to substitute a higher grade temperature characteristic or failure rate (QPL) than requested.

### RT/RTR22 (Commercial Model 3250)

| STD.<br>VALUES<br>OHMS | RT22C2_____ |            |            |            | RTR22D_____ |             |             |             | NOMINAL<br>RESOLUTION<br>(PERCENT) |
|------------------------|-------------|------------|------------|------------|-------------|-------------|-------------|-------------|------------------------------------|
|                        | L           | P          | W          | X          | L           | P           | W           | X           |                                    |
| 10                     | -           | -          | -          | -          | -           | -           | -           | -           | -                                  |
| 20                     | -           | -          | -          | -          | -           | -           | -           | -           | -                                  |
| 50                     | RT22C2L500  | RT22C2P500 | RT22C2W500 | RT22C2X500 | -           | -           | -           | -           | 0.80                               |
| 100                    | RT22C2L101  | RT22C2P101 | RT22C2W101 | RT22C2X101 | -           | -           | -           | -           | 0.90                               |
| 200                    | RT22C2L201  | RT22C2P201 | RT22C2W201 | RT22C2X201 | -           | -           | -           | -           | 0.70                               |
| 500                    | RT22C2L501  | RT22C2P501 | RT22C2W501 | RT22C2X501 | RTR22DL501M | RTR22DP501M | RTR22DW501M | RTR22DX501M | 0.60                               |
| 1K                     | RT22C2L102  | RT22C2P102 | RT22C2W102 | RT22C2X102 | RTR22DL102M | RTR22DP100M | RTR22DW102M | RTR22DX102M | 0.40                               |
| 2K                     | RT22C2L202  | RT22C2P202 | RT22C2W202 | RT22C2X202 | RTR22DL202M | RTR22DP202M | RTR22DW202M | RTR22DX202M | 0.30                               |
| 5K                     | RT22C2L502  | RT22C2P502 | RT22C2W502 | RT22C2X502 | RTR22DL502M | RTR22DP502M | RTR22DW502M | RTR22DX502M | 0.25                               |
| 10K                    | RT22C2L103  | RT22C2P103 | RT22C2W103 | RT22C2X103 | RTR22DL103M | RTR22DP103M | RTR22DW103M | RTR22DX103M | 0.19                               |
| 20K                    | RT22C2L203  | RT22C2P203 | RT22C2W203 | RT22C2X203 | RTR22DL203M | RTR22DP203M | RTR22DW203M | RTR22DX203M | 0.16                               |

## Qualified Part Numbers

**BOURNS®**

Bourns reserves the right per MIL-R-39035 to substitute a higher grade temperature characteristic or failure rate (QPL) than requested.

### RT/RTR24 (Commercial Model 3290)

| STD.<br>VALUES<br>OHMS | RT24C2_____ |            |            | RTR24D_____ |             |             | NOMINAL<br>RESOLUTION<br>(PERCENT) |
|------------------------|-------------|------------|------------|-------------|-------------|-------------|------------------------------------|
|                        | P           | W          | X          | P           | W           | X           |                                    |
| 10                     | RT24C2P100  | RT24C2W100 | RT24C2X100 | -           | -           | -           | 1.11                               |
| 20                     | RT24C2P200  | RT24C2W200 | RT24C2X200 | -           | -           | -           | 0.93                               |
| 50                     | RT24C2P500  | RT24C2W500 | RT24C2X500 | -           | -           | -           | 0.62                               |
| 100                    | RT24C2P101  | RT24C2W101 | RT24C2X101 | -           | -           | -           | 0.60                               |
| 200                    | RT24C2P201  | RT24C2W201 | RT24C2X201 | -           | -           | -           | 0.54                               |
| 500                    | RT24C2P501  | RT24C2W501 | RT24C2X501 | RTR24DP501M | RTR24DW501M | RTR24DX501M | 0.42                               |
| 1K                     | RT24C2P102  | RT24C2W102 | RT24C2X102 | RTR24DP102M | RTR24DW102M | RTR24DX102M | 0.33                               |
| 2K                     | RT24C2P202  | RT24C2W202 | RT24C2X202 | RTR24DP202M | RTR24DW202M | RTR24DX202M | 0.26                               |
| 5K                     | RT24C2P502  | RT24C2W502 | RT24C2X502 | RTR24DP502M | RTR24DW502M | RTR24DX502M | 0.20                               |
| 10K                    | RT24C2P103  | RT24C2W103 | RT24C2X103 | RTR24DP103M | RTR24DW103M | RTR24DX103M | 0.17                               |

### RT26 (Commercial Model 3260)

| STD.<br>VALUES<br>OHMS | RT26C2_____ |            | NOMINAL<br>RESOLUTION<br>(PERCENT) |
|------------------------|-------------|------------|------------------------------------|
|                        | W           | X          |                                    |
| 10                     | RT26C2W100  | RT26C2X100 | 1.90                               |
| 20                     | RT26C2W200  | RT26C2X200 | 1.50                               |
| 50                     | RT26C2W500  | RT26C2X500 | 1.25                               |
| 100                    | RT26C2W101  | RT26C2X101 | 1.00                               |
| 200                    | RT26C2W201  | RT26C2X201 | 0.94                               |
| 500                    | RT26C2W501  | RT26C2X501 | 0.58                               |
| 1K                     | RT26C2W102  | RT26C2X102 | 0.50                               |
| 2K                     | RT26C2W202  | RT26C2X202 | 0.45                               |
| 5K                     | RT26C2W502  | RT26C2X502 | 0.34                               |

FAILURE RATE LEVEL M = 1.0%

### RJ24 (Commercial Model 3296)

| STD.<br>VALUES<br>OHMS | RJ24F_____ |           |           |
|------------------------|------------|-----------|-----------|
|                        | P          | W         | X         |
| 10                     | RJ24FP100  | RJ24FW100 | RJ24FX100 |
| 20                     | RJ24FP200  | RJ24FW200 | RJ24FX200 |
| 50                     | RJ24FP500  | RJ24FW500 | RJ24FX500 |
| 100                    | RJ24FP101  | RJ24FW101 | RJ24FX101 |
| 200                    | RJ24FP201  | RJ24FW201 | RJ24FX201 |
| 500                    | RJ24FP501  | RJ24FW501 | RJ24FX501 |
| 1K                     | RJ24FP102  | RJ24FW102 | RJ24FX102 |
| 2K                     | RJ24FP202  | RJ24FW202 | RJ24FX202 |
| 5K                     | RJ24FP502  | RJ24FW502 | RJ24FX502 |
| 10K                    | RJ24FP103  | RJ24FW103 | RJ24FX103 |
| 20K                    | RJ24FP203  | RJ24FW203 | RJ24FX203 |
| 25K                    | RJ24FP253  | RJ24FW253 | RJ24FX253 |
| 50K                    | RJ24FP503  | RJ24FW503 | RJ24FX503 |
| 100K                   | RJ24FP104  | RJ24FW104 | RJ24FX104 |
| 250K                   | RJ24FP254  | RJ24FW254 | RJ24FX254 |
| 500K                   | RJ24FP504  | RJ24FW504 | RJ24FX504 |
| 1 MEG                  | RJ24FP105  | RJ24FW105 | RJ24FX105 |

FAILURE RATE LEVEL M = 1.0%

### RJ22 (Commercial Model 3252)

| STD.<br>VALUES<br>OHMS | RJ22F_____ |           |           |           |
|------------------------|------------|-----------|-----------|-----------|
|                        | L          | P         | W         | X         |
| 10                     | RJ22FL100  | RJ22FP100 | RJ22FW100 | RJ22FX100 |
| 20                     | RJ22FL200  | RJ22FP200 | RJ22FW200 | RJ22FX200 |
| 50                     | RJ22FL500  | RJ22FP500 | RJ22FW500 | RJ22FX500 |
| 100                    | RJ22FL101  | RJ22FP101 | RJ22FW101 | RJ22FX101 |
| 200                    | RJ22FL201  | RJ22FP201 | RJ22FW201 | RJ22FX201 |
| 500                    | RJ22FL501  | RJ22FP501 | RJ22FW501 | RJ22FX501 |
| 1K                     | RJ22FL102  | RJ22FP102 | RJ22FW102 | RJ22FX102 |
| 2K                     | RJ22FL202  | RJ22FP202 | RJ22FW202 | RJ22FX202 |
| 5K                     | RJ22FL502  | RJ22FP502 | RJ22FW502 | RJ22FX502 |
| 10K                    | RJ22FL103  | RJ22FP103 | RJ22FW103 | RJ22FX103 |
| 20K                    | RJ22FL203  | RJ22FP203 | RJ22FW203 | RJ22FX203 |
| 25K                    | RJ22FL253  | RJ22FP253 | RJ22FW253 | RJ22FX253 |
| 50K                    | RJ22FL503  | RJ22FP503 | RJ22FW503 | RJ22FX503 |
| 100K                   | RJ22FL104  | RJ22FP104 | RJ22FW104 | RJ22FX104 |
| 250K                   | RJ22FL254  | RJ22FP254 | RJ22FW254 | RJ22FX254 |
| 500K                   | RJ22FL504  | RJ22FP504 | RJ22FW504 | RJ22FX504 |
| 1 MEG                  | RJ22FL105  | RJ22FP105 | RJ22FW105 | RJ22FX105 |

## Qualified Part Numbers

**BOURNS®**

Bourns reserves the right per MIL-R-39035 to substitute a higher grade temperature characteristic or failure rate (QPL) than requested.

### RJR24 (Commercial Model 3296)

| STD.<br>VALUES<br>OHMS | RJR24F_____ |             |             |
|------------------------|-------------|-------------|-------------|
|                        | P           | W           | X           |
| 10                     | RJR24FP100* | RJR24FW100* | RJR24FX100* |
| 20                     | RJR24FP200* | RJR24FW200* | RJR24FX200* |
| 50                     | RJR24FP500* | RJR24FW500* | RJR24FX500* |
| 100                    | RJR24FP101* | RJR24FW101* | RJR24FX101* |
| 200                    | RJR24FP201* | RJR24FW201* | RJR24FX201* |
| 500                    | RJR24FP501* | RJR24FW501* | RJR24FX501* |
| 1K                     | RJR24FP102* | RJR24FW102* | RJR24FX102* |
| 2K                     | RJR24FP202* | RJR24FW202* | RJR24FX202* |
| 5K                     | RJR24FP502* | RJR24FW502* | RJR24FX502* |
| 10K                    | RJR24FP103* | RJR24FW103* | RJR24FX103* |
| 20K                    | RJR24FP203* | RJR24FW203* | RJR24FX203* |
| 25K                    | RJR24FP253* | RJR24FW253* | RJR24FX253* |
| 50K                    | RJR24FP503* | RJR24FW503* | RJR24FX503* |
| 100K                   | RJR24FP104* | RJR24FW104* | RJR24FX104* |
| 250K                   | RJR24FP254* | RJR24FW254* | RJR24FX254* |
| 500K                   | RJR24FP504* | RJR24FW504* | RJR24FX504* |
| 1 MEG                  | RJR24FP105* | RJR24FW105* | RJR24FX105* |

### RJ/RJR26 (Commercial Model 3262)

| STD.<br>VALUES<br>OHMS | RJ26F_____ |           |           | RJR26F_____ |             |             |
|------------------------|------------|-----------|-----------|-------------|-------------|-------------|
|                        | P          | W         | X         | P           | W           | X           |
| 10                     | RJ26FP100  | RJ26FW100 | RJ26FX100 | RJR26FP100* | RJR26FW100* | RJR26FX100* |
| 20                     | RJ26FP200  | RJ26FW200 | RJ26FX200 | RJR26FP200* | RJR26FW200* | RJR26FX200* |
| 50                     | RJ26FP500  | RJ26FW500 | RJ26FX500 | RJR26FP500* | RJR26FW500* | RJR26FX500* |
| 100                    | RJ26FP101  | RJ26FW101 | RJ26FX101 | RJR26FP101* | RJR26FW101* | RJR26FX101* |
| 200                    | RJ26FP201  | RJ26FW201 | RJ26FX201 | RJR26FP201* | RJR26FW201* | RJR26FX201* |
| 500                    | RJ26FP501  | RJ26FW501 | RJ26FX501 | RJR26FP501* | RJR26FW501* | RJR26FX501* |
| 1K                     | RJ26FP102  | RJ26FW102 | RJ26FX102 | RJR26FP102* | RJR26FW102* | RJR26FX102* |
| 2K                     | RJ26FP202  | RJ26FW202 | RJ26FX202 | RJR26FP202* | RJR26FW202* | RJR26FX202* |
| 5K                     | RJ26FP502  | RJ26FW502 | RJ26FX502 | RJR26FP502* | RJR26FW502* | RJR26FX502* |
| 10K                    | RJ26FP103  | RJ26FW103 | RJ26FX103 | RJR26FP103* | RJR26FW103* | RJR26FX103* |
| 20K                    | RJ26FP203  | RJ26FW203 | RJ26FX203 | RJR26FP203* | RJR26FW203* | RJR26FX203* |
| 25K                    | RJ26FP253  | RJ26FW253 | RJ26FX253 | RJR26FP253* | RJR26FW253* | RJR26FX253* |
| 50K                    | RJ26FP503  | RJ26FW503 | RJ26FX503 | RJR26FP503* | RJR26FW503* | RJR26FX503* |
| 100K                   | RJ26FP104  | RJ26FW104 | RJ26FX104 | RJR26FP104* | RJR26FW104* | RJR26FX104* |
| 250K                   | RJ26FP254  | RJ26FW254 | RJ26FX254 | RJR26FP254* | RJR26FW254* | RJR26FX254* |
| 500K                   | RJ26FP504  | RJ26FW504 | RJ26FX504 | RJR26FP504* | RJR26FW504* | RJR26FX504* |
| 1 MEG                  | RJ26FP105  | RJ26FW105 | RJ26FX105 | RJR26FP105* | RJR26FW105* | RJR26FX105* |

\*LAST LETTER IN NUMBER IS FAILURE RATE LEVEL. M = 1.0% P = 0.1% R = 0.01%

## HOW TO USE THIS SECTION

This Applications/Processing Guide is intended to provide you with points to consider for designing circuits, selecting trimmers and arranging board layouts, to achieve maximum performance and long life for your circuits and systems. We have also included information on steps your manufacturing engineers can take to preserve circuit reliability.

For example, are you aware that the trimmers and other mechanical components on your boards may face a more extreme environment during boardwashing on your own production line, than they ever will in use? For those trimmers that may need to be reset, are you remembering to select and mount the trimmers to provide easy accessibility?

In this section, you'll find dozens of pointers, reminders and useful facts that will help you be more knowledgeable and successful in using trimmers.

## TRIMMER BASICS


In its most common form, a trimmer is simply a device containing a resistive element, and a wiper, or adjustable tap, contacting the element. The wiper can be mechanically moved to vary the amount of voltage or resistance in the circuit. The resistive element is usually laid out in linear or a circular configuration:

## The Resistive Element

Trimmers for commercial applications typically have a resistive element made of carbon or cermet (a combination of CERamic and METal), or of resistance wire wound on an insulated copper mandrel.

The main advantages of wirewound trimmers are their low temperature coefficient, higher power dissipation, lower noise, tighter resistance tolerance, and, when used as a variable resistor, the excellent current-carrying capacity through the wiper due to the lower contact resistance. Also, their long-term resistance stability with time and temperature is slightly better than cermet.

Cermet trimmers provide a wider resistance range (10 ohms to 5 megohms, versus a maximum of 50K ohms for wirewound). Also, the wiper output can be set closer to the desired value since the resistive element presents a continuous contact surface for the wiper, as opposed to the discrete turns (resolution) of the wirewound. Other advantages with cermet are the lower reactance in high-frequency applications, the smaller sizes available, and the generally lower price than wirewound types.

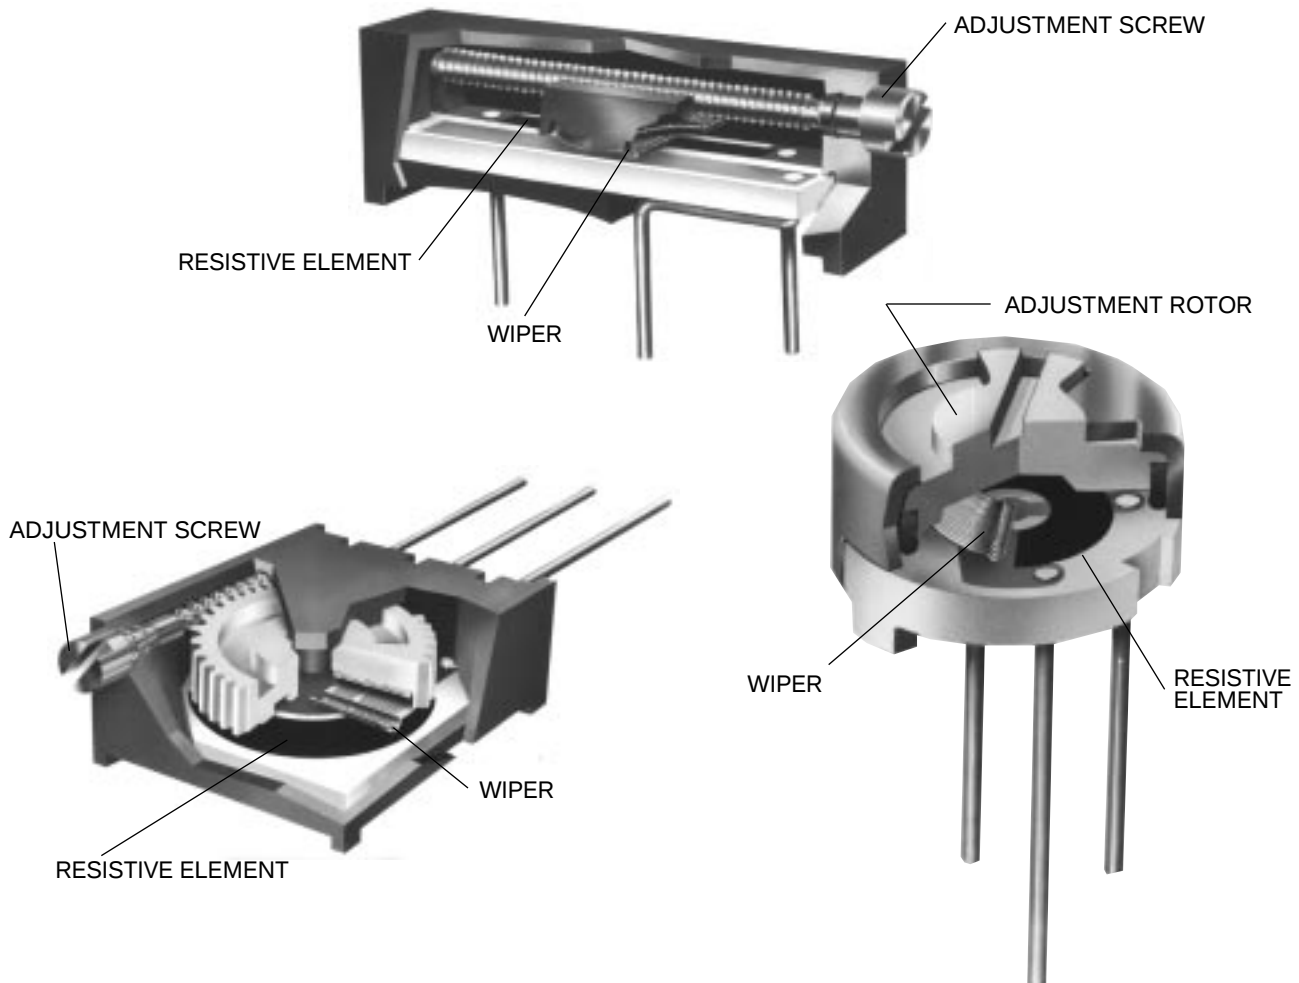

# Soldering And Cleaning Processes

**BOURNS®**

This application note is designed to provide step-by-step processing recommendations. It covers the popular SMC soldering processes currently in use and provides recommendations and cautions for each step. Since many variations of temperature, time, processes, cleaning agents and board types are found in the electronics industry, you'll want to test and verify your own system.

The process steps, recommendations and cautions are based on Bourns Trimpot surveys of SMC users, equipment manufacturers and materials suppliers. Also, comments reflect results of Bourns' testing. Our findings suggest the following soldering and cleaning processes:

1. SOLDERING - Forced Hot Air, Convection, IR, Vapor Phase (In-Line), Wave (Single and Dual)
  2. CLEANING - Solvent, Aqueous, Semi-Aqueous, No-Clean
- On the facing page are the common methods, materials and maximum temperature/time parameters for soldering and cleaning processes.

**1**



## Solder Paste Printing

### Reflow

#### GENERAL

Use the optimum solder paste for the pattern, printing process, solder paste density and solder joint quality.

#### RECOMMENDED

Use Sn 63% Pb 37% solder paste. Use 8 to 10 mil thickness for solder paste print.

#### CAUTION

Since solder paste usually contains a high percentage of activators, you must ensure adequate cleaning to remove all residues, unless no-clean (low solids) paste is used.

**2**



## Adhesive Application


### Flow (Wave)

#### GENERAL

The adhesive must hold the SM Component (SMC) in correct orientation upon placement and maintain correct trimmer position during physical handling before final solder processing.

#### RECOMMENDED

To assure positional stability, place a single dot of epoxy under the SMC.




#### CAUTION

Stability after placement is a direct function of the volume of adhesive used. Use enough epoxy to assure stability through the cure process.

Avoid overflow of epoxy to solder pad and terminal areas.

**3**



## SMC Placement

#### GENERAL

Use pick-and-place equipment with vacuum nozzle ID size that allows adequate suction to pick the SMC out of the embossed cavity.

#### RECOMMENDED


The nozzle inside diameter (ID) should not exceed .100 in. (2.54mm) to ensure adequate suction and part alignment.

#### CAUTION

Assure parts are placed so that all terminals are equidistant (<4 mils) from the solder pads.

Align terminals with solder belt direction of travel to avoid body shadowing effects during flow soldering.

**4**



## Adhesive Cure

### Flow (Wave)

#### GENERAL

Use heat/time cure method with either convection oven or infrared radiation.


#### RECOMMENDED

Cure using the temperature and times recommended by the adhesive manufacturer.

#### CAUTION

Use enough cure time to assure complete adhesive transition from fluid to solid.

**5**



## Flux Application

### Flow (Wave)

#### GENERAL

Use the correct flux to remove surface oxides, prevent reoxidation and promote wetting.

#### RECOMMENDED

- RMA
- No-clean SRB (Synthetic resin based)
- OA (Organic Acid) (See caution)

#### CAUTION

Avoid highly activated fluxes. Consult factory before using OA.

# Soldering And Cleaning Processes



## SOLDERING/CLEANING METHODS

| Process Step                | REFLOW                            |                                   |                                   |                                    |                             |                             |                             |                              | FLOW              |                   |                   |                    | Material                       |
|-----------------------------|-----------------------------------|-----------------------------------|-----------------------------------|------------------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------------|-------------------|-------------------|-------------------|--------------------|--------------------------------|
|                             | Hot Air;<br>Infrared<br>(Solvent) | Hot Air;<br>Infrared<br>(Semi-Aq) | Hot Air;<br>Infrared<br>(Aqueous) | Hot Air;<br>Infrared<br>(No-Clean) | Vapor<br>Phase<br>(Solvent) | Vapor<br>Phase<br>(Semi-Aq) | Vapor<br>Phase<br>(Aqueous) | Vapor<br>Phase<br>(No-Clean) | Wave<br>(Solvent) | Wave<br>(Semi-Aq) | Wave<br>(Aqueous) | Wave<br>(No-Clean) |                                |
| 1. Solder Paste Printing    | X                                 | X                                 | X                                 | X                                  | X                           | X                           | X                           | X                            |                   |                   |                   |                    |                                |
| 2. Adhesive Application     |                                   |                                   |                                   |                                    |                             |                             |                             |                              | X                 | X                 | X                 | X                  |                                |
| 3. Component Placement      | X                                 | X                                 | X                                 | X                                  | X                           | X                           | X                           | X                            | X                 | X                 | X                 | X                  |                                |
| 4. Adhesive Cure            |                                   |                                   |                                   |                                    |                             |                             |                             |                              | X                 | X                 | X                 | X                  |                                |
| 5. Flux Application         |                                   |                                   |                                   |                                    |                             |                             |                             |                              | X                 |                   |                   |                    | Rosin                          |
| 5. Flux Application         |                                   |                                   |                                   |                                    |                             |                             |                             |                              |                   | X                 |                   |                    | Rosin                          |
| 5. Flux Application         |                                   |                                   |                                   |                                    |                             |                             |                             |                              |                   |                   | X                 |                    | Organic Acid                   |
| 5. Flux Application         |                                   |                                   |                                   |                                    |                             |                             |                             |                              |                   |                   |                   | X                  | Synthetic Resin Based          |
| 6. Solder (Reflow)          | X                                 | X                                 |                                   | X                                  | X                           | X                           | X                           | X                            |                   |                   |                   |                    | 63/37 Sn/Pb                    |
| 7. Solder (Flow)            |                                   |                                   |                                   |                                    |                             |                             |                             |                              | X                 | X                 | X                 | X                  | 63/37 Sn/Pb                    |
| 8. Wash (Solvent)           | X                                 |                                   |                                   |                                    | X                           |                             |                             |                              | X                 |                   |                   |                    | ODS Free                       |
| 8. Wash (Semi-Aqueous)      |                                   | X                                 |                                   |                                    |                             | X                           |                             |                              |                   | X                 |                   |                    | Terpene, Hydrocarbon Based     |
| 8. Wash (Aqueous)           |                                   |                                   | X                                 |                                    |                             |                             | X                           |                              |                   |                   | X                 |                    | DI H2O; Surfactant; Saponifier |
| High Pressure Fluids        |                                   |                                   | X                                 |                                    |                             |                             | X                           |                              |                   |                   | X                 |                    | (See Caution)                  |
| Max. Temp. (°C)/Time (Secs) | 235/40                            | 235/40                            | 235/40                            | 235/40                             | 215/180                     | 215/180                     | 215/180                     | 215/180                      | 260/5             | 260/5             | 260/5             |                    |                                |
| Min. Temp. (°C)             | 215                               | 215                               | 215                               | 215                                | 215                         | 215                         | 215                         | 215                          | 215               | 215               | 215               |                    |                                |

## TRIMMING POTENTIOMETERS AND DEFINITIONS

The following terms and definitions have been edited from the Industrial Standard published by the Variable Resistive Components Institute. It is intended to encourage standardization in communication and understanding between the manufacturer and user. The complete standard, including detailed test procedures, is available upon request.

## GENERAL TERMS

**TRIMMING POTENTIOMETER:** An electrical mechanical device with three terminals. Two terminals are connected to the ends of a resistive element and one terminal is connected to a movable conductive contact which slides over the element, thus allowing the input voltage to be divided as a function of the mechanical input. It can function as either a voltage divider or rheostat.

**WIREWOUND TRIMMING POTENTIOMETER:** A trimming potentiometer characterized by a resistance element made up of turns of wire on which the wiper contacts only a small portion of each turn.

**NON-WIREWOUND TRIMMING POTENTIOMETER:** A trimming potentiometer characterized by the continuous nature of the surface area of the resistance element to be contacted. Contact is maintained over a continuous, unbroken path. The resistance is achieved by using material compositions other than wire such as carbon, conductive plastics, metal film and cermet.

**RESISTANCE ELEMENT:** A continuous, unbroken length of resistive material without joints, bonds or welds except at the junction of the element and the electrical terminals connected to each end of the element, or at an intermediate point such as a center tap.

**ADJUSTMENT SHAFT:** The mechanical input member of a trimming potentiometer which when actuated causes the wiper to traverse the resistance element resulting in a change in output voltage or resistance.

**SINGLE-TURN ADJUSTMENT:** Requires 360° or less mechanical input to cause the wiper to traverse the total resistance element.

**MULTITURN ADJUSTMENT:** Requires more than 360° mechanical adjustment to cause the wiper to traverse the total resistance element.

**TERMINAL:** An external member that provides electrical access to the resistance element and wiper.

**LEADWIRE TYPE TERMINAL:** Flexible insulated conductor.

**PRINTED CIRCUIT TERMINAL:** Rigid uninsulated electrical conductor, suitable for printed circuit board plug-in.

**SOLDER LUG TERMINAL:** Rigid uninsulated electrical conductor, suitable for external lead attachment.

**WIPER:** The wiper is the member in contact with the resistive element that allows the output to be varied when the adjustment shaft is rotated.

**STOP-CLUTCH:** A device which allows the wiper to idle at the ends of the resistive element without damage as the adjustment shaft continues to be actuated in the same direction.

**STOP – SOLID:** A positive limit to mechanical and/or electrical adjustment.

**STACKING:** The mounting of one trimming potentiometer adjacent to or on top of another utilizing the same mounting hardware.

**THEORETICAL RESOLUTION: (Wirewound only)** The theoretical measurement of sensitivity to which the output ratio may be adjusted; the reciprocal of the number of turns of wire in resistance winding expressed as a percentage.

$N$  = Total number of resistance wire turns.

$\frac{1}{N} \times 100$  = Theoretical resolution percent.

## INPUT AND OUTPUT TERMS

**TOTAL APPLIED VOLTAGE:** The total voltage applied between the designated input terminals.


**OUTPUT VOLTAGE:** The voltage between the wiper terminal and the designated reference point. Unless otherwise specified, the designated reference point is the CCW terminal.

**OUTPUT RATIO:** The ratio of the output voltage to the designated input reference voltage. Unless otherwise specified, the reference voltage is the total applied voltage.

**LOAD RESISTANCE:** An external resistance as seen by the Output Voltage (connected between the wiper terminal and the designated reference point.)

## ADJUSTMENT TERMS

**DIRECTION OF TRAVEL:** Clockwise (CW) or counterclockwise (CCW) rotation when viewing the adjustment end of the potentiometer.



**MECHANICAL TRAVEL — SOLID STOPS:** The total travel of the adjustment shaft between integral stops. Continuity must be maintained throughout the travel.

**MECHANICAL TRAVEL — CLUTCHING ACTION:** The total travel of the adjustment shaft between the points where clutch actuation begins. Continuity must be maintained throughout the travel and during clutch actuation.

**MECHANICAL TRAVEL — CONTINUOUS ROTATION:** The total travel of the adjustment shaft when the wiper movement is unrestricted at either end of the resistive element as the adjustment shaft continues to be actuated.

**ADJUSTMENT TRAVEL (ELECTRICAL):** The total travel of the adjustment shaft between minimum and maximum output voltages.

**CONTINUITY TRAVEL:** The total travel of the shaft over which electrical continuity is maintained between the wiper and the resistance element.

## ELECTRICAL AND OPERATIONAL CHARACTERISTICS

**TOTAL RESISTANCE:** The DC resistance between the input terminals with the wiper positioned to either end stop, or in dead band for continuous rotation potentiometers.

## TEST VOLTAGE

| Total Resistance, Nominal | Maximum Test Voltage |           |
|---------------------------|----------------------|-----------|
|                           | Non-Wirewound        | Wirewound |
| Ohms                      | Volts DC             | Volts DC  |
| .1 TO 1.0                 | 0.1                  | 0.1       |
| 1.0 to 50                 | 0.3                  | 0.3       |
| 50 to 100                 | 2.0                  | 2.0       |
| 100 to 1000               | 3.0                  | 3.0       |
| 1K to 100K                | 10                   | 10        |
| Over 0.1 megohm           | 50                   | —         |

NOTE: The test voltages should never exceed the equivalent of 10% rated power. The minimum voltage to be used is 10 MV.

**ABSOLUTE MINIMUM RESISTANCE:** The resistance measured between the wiper terminal and each end terminal with the wiper positioned to give a minimum value.

**END RESISTANCE:** The resistance measured between the wiper terminal and an end terminal when the wiper is positioned at the corresponding end of mechanical travel. Absolute minimum resistance and end resistance are synonymous for continuous rotation trimmers.

**TEMPERATURE COEFFICIENT OF RESISTANCE:** The unit change in resistance per degree Celsius change from a reference temperature, expressed in parts per million per degree Celsius as follows:

$$TC = \frac{R^2 - R^1}{R^1 (T^2 - T^1)} \times 10^6$$

Where:

R1 = Resistance at reference temperature in ohms.  
R2 = Resistance at test temperature in ohms.  
T1 = Reference temperature in degrees Celsius.  
T2 = Test temperature in degrees Celsius.

**RESISTANCE-TEMPERATURE CHARACTERISTIC:** The difference between the total resistance values measured at a reference temperature of 25°C and the specified test temperature expressed as a percent of the Total Resistance.

$$RTC = \frac{R^2 - R^1}{R^1} \times 100$$

Where:

R1 = Resistance at reference temperature (25°C) in ohms.  
R2 = Resistance at the test temperature in ohms.

**CONTACT RESISTANCE VARIATION:** The apparent resistance seen between the wiper and the resistance element when the wiper is energized with a specified current and moved over the adjustment travel in either direction at a constant speed. The output variations are measured over a specified frequency bandwidth, exclusive of the effects due to roll-on or roll-off of the terminations and is expressed in ohms or % of total resistance.

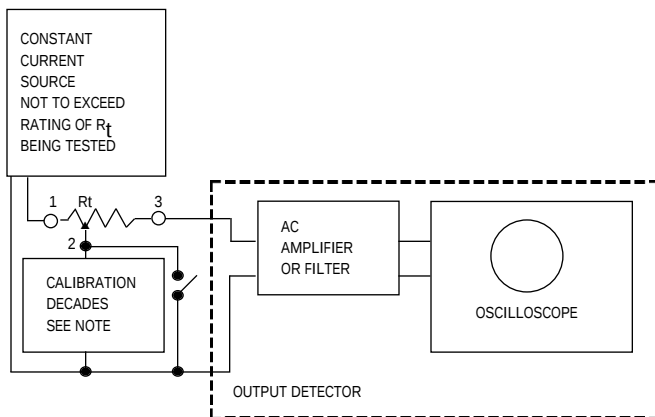


Figure 1. Contact-resistance-variation measuring circuit


Rt = Test specimen  
Output detector bandwidth: 100 cycles to 50 kilocycles  
Minimum input impedance to output detector:  
At least 10 times the nominal resistance being tested

**NOTE:** At the calibration of the decade, terminals 1 and 2 must be coincident. Calibration decade is to be set for the contact-resistance variation (CRV) level of the specified nominal resistance being tested.

TABLE II

| Test Current (±20%) | Total Resistance Range   |
|---------------------|--------------------------|
| 30 ma               | 2 = Rt = 200             |
| 5 ma                | 200 < Rt = 3K            |
| 1 ma                | 3K < Rt = 200K           |
| 200 ua              | 200K < Rt = 1 megohm     |
| 50 ua               | 1 megohm < Rt = 5 megohm |

**EQUIVALENT NOISE RESISTANCE:** Wirewound only. Any spurious variation in the electrical output not present in the input, defined quantitatively in terms of an equivalent parasitic, transient resistance in ohms, appearing between the contact and the resistant element when the shaft is rotated. The equivalent Noise Resistance is defined independently of the resolution, functional characteristics and the total travel. The magnitude of the Equivalent Noise Resistance is the maximum departure from a specific reference line. The wiper of the potentiometer is required to be excited by a specific current and moved at a specific speed.

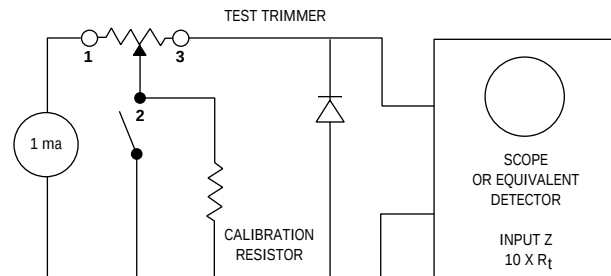

$$ENR \text{ (ohms)} = \frac{\text{Max. deviation (volts)}}{.001 \text{ amps}}$$

**CONTINUITY:** Continuity is the maintenance of continuous electrical contact between the wiper and both end terminals of the resistive element.

**SETTING STABILITY:** The amount of change in the output voltage, without readjustment, expressed as a percentage of the total applied voltage.

**DIELECTRIC STRENGTH:** The ability to withstand the application of a specified potential of a given characteristic, between the terminals and all other external conducting members such as shaft, housing and mounting hardware without exceeding a specified leakage current value.

**INSULATION RESISTANCE:** The resistance to a specified DC voltage impressed between the terminals and all other external conducting members such as shaft, housing and mounting hardware.

**POWER RATING:** The maximum power that a trimming potentiometer can dissipate across the total resistive element under specified conditions while meeting specified performance requirements.

**ROTATIONAL LIFE:** The number of cycles obtainable under specified operating conditions while remaining within specified allowable degradation. A cycle is defined as one complete traversal of the wiper over the resistive element in both directions.

**LOAD LIFE:** The number of hours at which a device may dissipate rated power under specified operating conditions while remaining within specified allowable degradations.

**ADJUSTABILITY (OUTPUT RESISTANCE):** The precision with which the output resistance of a device can be set to the desired value.

**ADJUSTABILITY (OUTPUT VOLTAGE RATIO):** The precision with which the output voltage ratio of a device can be set to the desired value.

## MECHANICAL TERMS

**STARTING TORQUE:** The maximum moment in the clockwise and counterclockwise directions required to initiate shaft adjustment anywhere in the mechanical travel.

**STOP TORQUE:** The maximum static moment that can be applied to adjustment shaft at each mechanical stop for a specified period of time without loss of continuity or mechanical damage affecting operational characteristics.

**SOLDERABILITY:** The ability of the terminals to accept a uniform coating of solder under specified conditions.

**WELDABILITY:** The ability of materials to be welded together under specified conditions.

**TERMINAL STRENGTH:** The ability of the terminals to withstand specified mechanical stresses without sustaining damage that would affect utility of the terminals or operation of the trimming potentiometer.


**IMMERSION SEALED:** The ability of the unit to withstand submersion in acceptable cleaning solutions used in normal soldering processes without performance degradation under specified environmental conditions.

## TRIMMER "ABILITIES"

When you are selecting components for a new design, you typically take into account the environmental conditions that the components will need to endure during the lifetime of the instrument or device. Designers in the past have often overlooked the environmental extremes of their own production lines, where the conditions may be much more severe than anything encountered in actual end use.

## PROCESSABILITY

"Processability" refers to the ability of the unit to withstand the production-line processes associated with the finishing steps on the PC boards. Typically, both SMT and through-hole products are subjected to similar PC board processing operations after preparation for assembly. These operations can generally be summarized as follows:

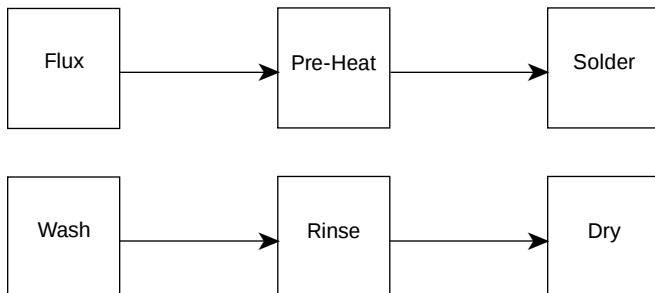

### Soldering (SMT)

Four types of equipment are usually associated with SMT soldering:

**IR System** — Uses a multi-zone infrared furnace with IR elements heated to a temperature substantially above chamber or product temperature. Energy is supplied to the product primarily by IR radiation to reflow solder.

**Forced Hot Air Convection System** — Uses a multizone forced air convection system with heat source panels using IR or other type heating elements. Approximately 85% of the heating is provided by free convection to reflow solder on exposed PC boards.

**Dual Wave System** — Utilizes two parallel solder waves. The first is a turbulent wave followed by a laminar wave. The turbulent wave is for small, constricted areas, while the laminar wave removes solder projections.

**Vapor Phase System** — Provides a single-zone condensation heat source achieved with liquid fluorinated hydrocarbons that have been brought to the boiling point to create a saturated vapor zone. Heat is then released by the fluid's heat of vaporization as the vapor condenses on the product.

### Soldering (Through-hole)

Two types of equipment are usually associated with through-hole soldering:

**Single Wave System** — Provides an inclined portion of the solder wave for the PC board to pass over. The PC board is positioned to bring many potential solder joints in contact with the wave simultaneously for a short time for soldering.

**Drag System** — Provides for PC boards to be dragged across the surface of the solder pot. Soldered connections are made during this operation.

### PC Board Washing


Two types of equipment are usually associated with both SMT and through-hole products.


**Pressure System** — Accomplishes cleaning by directing sprays of water under high pressure from multiple nozzles.

**Flooding System** — Utilizes a combination of flooding (at normal water pressure) and surfactant action for cleaning).

### Soldering and Wash Processes

Figure 1 shows typical profiles any component may see during a soldering and board washing operation. For details of material and process variables recommendations, see "Soldering and Cleaning Processes", page 76.

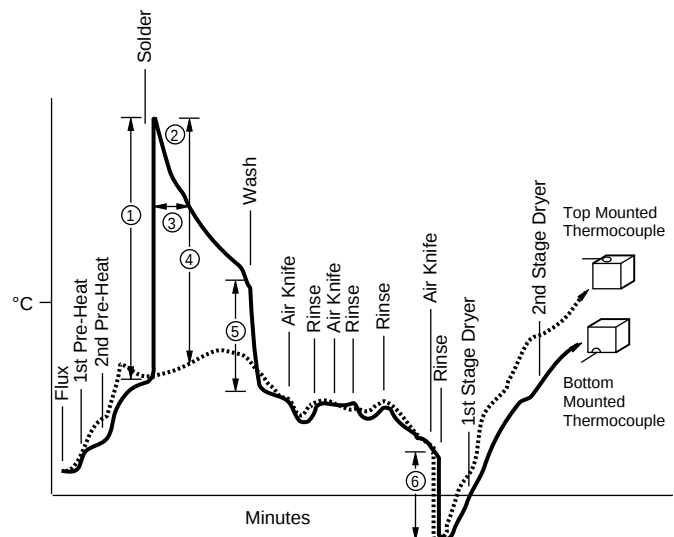

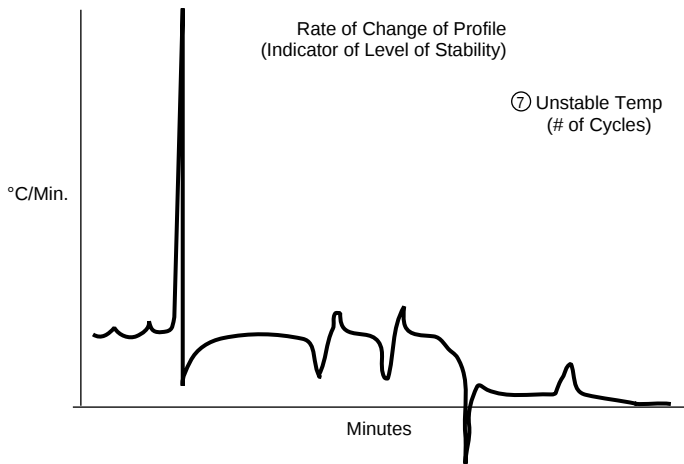

**Figure 1.**  
Typical temperature profile for board washing and soldering.

#### Critical profile parameters

- ① Temperature Shock (°C)
- ② Maximum Temperature (°C)
- ③ Temperature Exposure (Minimum)
- ④ Temperature Gradient (°C)
- ⑤ Temperature Shock Decrease in Water (°C)
- ⑥ Temperature Shock Decrease in Water & Air Pressure (°C)
- ⑦ Unstable Temperature (see next page)

#### General Guidelines for Guarding Against Component Damage

- To minimize temperature shock
  - Pre-heat boards to maximum acceptable level
  - Reduce time in solder
- To avoid heating components above their maximum rated temperature
  - Use lowest acceptable solder temperature
  - Use maximum allowable conveyor speed
  - Limit pre-heat temperature to maximum necessary
- To limit time of exposure above rated temperature
  - Limit time in solder
  - After solder operation, cool board to wash temperature before it enters wash
- To minimize temperature difference between top and bottom of board
  - Apply pre-heat to both top and bottom
- To reduce temperature shock on entering the moist environment of the wash
  - Use wash/rinse temperature as near component temperature as possible
  - Extend time between solder process and wash
  - Cool board after solder operation, prior to entering wash
- To minimize temperature variations as component travels through moisture
  - Minimize number of wash/rinse and rinse/dry cycles
  - Use heated air for air knives (to counter evaporative cooling effect)
  - Minimize difference between wash and rinse temperature

To minimize exposure to high-pressure water during board wash


- Select trimmer models with pin styles that orient the rotor seal area away from exposure to the high-pressure water stream

#### SETTABILITY

Settability refers to the ease with which a trimmer can be set accurately to the position that produces the desired circuit condition.

Where the requirement is for obtaining a highly accurate setting the preference is for cermet — because a small incremental adjustment in a wirewound unit does not always produce the expected change in output as the wiper moves off one turn of wire and onto another.

Setting accuracy is better with a multiturn unit than with a single-turn. This is especially true when the speed of setting is also a requirement as on a production line (Figure 2).

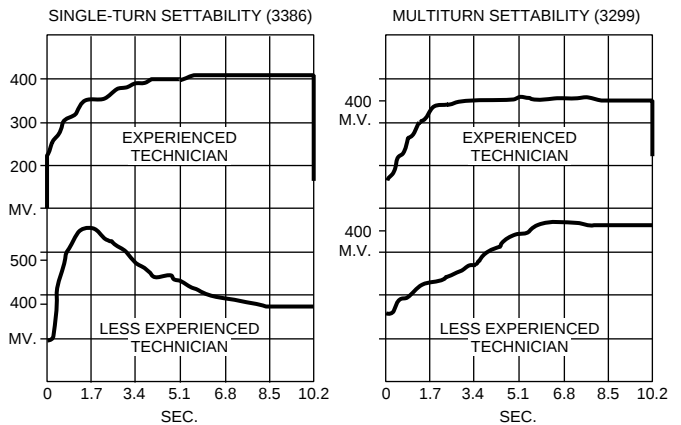

**Figure 2.**  
When accurate setting is required, a multiturn trimmer can generally be set faster than a single-turn.

#### STABILITY

Stability refers to the ability of the trimmer to remain at the desired setting. Environmental factors play an important role here: stability may be affected by temperature exposure, thermal shock/cycling, humidity, and mechanical shock or vibration.

This is not a matter of concern in most applications, since Bourns trimmers exhibit excellent stability under all specified conditions. Stability is most often a concern when cermet trimmers are used in low current "dry" circuits (50uA amps and below). Under these conditions the contact resistance may vary, making the wiper appear unstable. This is most noticeable in some rheostat applications. This can be avoided by using a wirewound unit, or choosing a cermet trimmer that has been designed for dry-circuit applications. Bourns applications engineers can assist you on this and other questions.

#### ACCESSIBILITY

When selecting a trimmer and determining its placement on the board, keep in mind the people who will have to use it. Bourns trimmers are available in a wide variety of sizes, shapes, configurations, and placement of adjustment screws. You will usually find a unit on which the access for adjustment will be convenient for the user.

Keep in mind the different requirements for accessibility depending on whether adjustment will be done on the assembly line or in the field; with the board uncovered, in a housing or cabinet, or on an extender. Also consider whether production-line adjustment will be done manually or by robotics. A Bourns applications engineer can advise on special high-speed automatic adjustment features.

## USABILITY

In selecting a trimmer for a specific application, it's important to be aware that the catalog contains a myriad of facts about each model that can assist you in finding the most suitable choice. For example:

**Contact Resistance Variation (CRV)** — Under MIL-R 22097 and MIL-R-39035, the maximum CRV is 3%. All Bourns trimmers meet this standard (3% or 3 ohms, whichever is greater). For applications that demand a more rigorous standard, some Bourns trimmers are rated at 2% or 2 ohms, and many others at 1% or 1 ohm.

**Power Rating** — The ambient temperature at which the trimmer will operate has an important bearing on power rating. Power ratings are usually specified at 70° or 85°C; at a temperature of 150°C, the power rating of many trimmers is reduced to zero.

**Temperature Coefficient of Resistance (T.C.)** — This specification is a measure of how much the resistance changes with a change in temperature. In many applications a T.C. of  $\pm 250\text{PPM}/^\circ\text{C}$  is acceptable. Typical T.C. specifications for cermet models are  $\pm 100\text{PPM}/^\circ\text{C}$  and  $\pm 50\text{PPM}/^\circ\text{C}$  for wirewound models.

## RELIABILITY

One of the greatest challenges facing American manufacturers in the early '90s lies in the area of reliability — a challenge for component manufacturers and equipment manufacturers alike. Bourns has been on the leading edge of this effort, both in the area of instituting new methods and technologies for achieving higher reliability, and bringing an awareness of the need to other manufacturers.

## SURFACE MOUNTED DEVICES (SMD)

### AN EMERGING TECHNOLOGY

Surface mounting of electronic components represents another significant advance in PC board processing. Many U.S. companies have expressed an interest in SMD assembly methods to replace the often troublesome and costly techniques now used with leaded components. Unfortunately, for a number of reasons, this interest has not resulted to date in a major commitment to SMD handling equipment.

There are direct and indirect benefits associated with surface mounting. Since the direct benefits are outgrowths of the indirect ones, some explanation of these interrelated factors is required in order to understand this complex, highly technical and investment intensive subject. Further, a listing of the primary advantages will make additional comments on Japan's SMD usage and growth unnecessary.

In capsule format, the primary advantages (with comments on secondary benefits) are:

- **Lower End-Equipment Cost**  
(positions OEM's for aggressive pricing to achieve market penetration).
- **Superior Product Performance**  
(satisfies user requirements for improved operational performance).
- **Improved Product Quality and Reliability**  
(creates confidence factor which easily translates to increased demand or sales).

### • Smaller Finished Product Size

(addresses demand for miniaturization).

Cost, performance, quality/reliability and size — how are these factors interrelated and how are they achieved through surface mounting?

A by-product of SMD technology is the downsizing of components. Size reductions range from 25% to 60%, depending upon the device in question. High PC board densities can be achieved (more components per square inch of real estate; surface mounted units can also be assembled on both sides). PC board material savings alone are substantial. When circuits diminish, external hardware and other materials follow — further savings. Even freight charges are decreased by lighter equipment weight and less packaging.

Surface mounted component prices are forecasted to decline, the result of automated volume production. Volume is directly related to component standardization. By having a few sizes to cover a large range of electrical values and/or parameters, large quantities of a given device can be produced at a much lower per unit cost. Selling prices fall as volume increases. Component quality is also enhanced by eliminating many of the variables associated with short production runs.

Automatic SMD handling equipment, although capital intensive, is the single-most effective way to reduce labor costs and increase yields. Typical "pick and place" machines can assemble components 8 to 10 times faster than human assemblers, with virtually no mistakes. Major direct labor reductions are obvious. The combination of improved component quality and "mistake-free" component placement further decreases costs by eliminating the normal rework of auto-inserted boards.

The many advantages of SMD technology will force change upon both electronic equipment manufacturers and component suppliers alike. Worldwide competitive prices and performance pressures will make it happen. Few electronic components will escape its influence, trimming potentiometers being no exception. Bourns is committed to SMD conversion, and we intend to be a leader in surface mounted trimmer devices. Bourns surface mount trimmers begin on page 12.

## GENERAL NOTES:

Plated-Through Holes: (Ref. MIL-STD-275D).

- 5.5 Plated-through holes. The difference between the inside diameter of the plated-through hole and the nominal outside diameter of the inserted lead shall be not greater than 0.028 inch (0.71mm) or less than 0.010 inch (0.25 mm). Unless otherwise specified, the hole size shall be the finished plated size after solder coating or fusing. When flat ribbon leads are mounted through plated-through holes, the difference between the nominal thickness of the lead and the inside diameter of the plated-through hole shall not exceed 0.028 inch (0.71 mm).