




SMD / No. 417/418


查询"417"供应商



Dimensions (mm)



Pad Layout



Limits for Pre-arcing Time

Rated Current	$2.0 \times I_{\text{Rated}}$	$2.0 \times I_{\text{Rated}}$
400mA ... 10.00A	< 60s	< 5s



UL 248-14, 125V, F

Time-Current Characteristic

Quick Acting (F)

Standard

UL 248-14

CSA C22.2 No. 248.14

Approvals

UL Recognized: File No. E 67006

CSA Certified: File No. LR 702775

Features

Flame resistant ceramic housing
For line or low voltage applications
Low voltage drop
Internationally approved

WebLinks

Data Sheet

www.wickmann.com/products/417.pdf

Approval Certificates

www.wickmann.com/approvals

Time-Current Curve

Page 70

www.wickmann.com/itcurves

Packaging

Page 118

www.wickmann.com/pack

FaxBack Document # 325

Specifications

Packaging

000: Blister Tape (1000 pcs.)

Materials

Housing: Ceramic

Element: Wire

Terminals: Copper alloy, tin plated

Operating Temperature

-55°C to +125°C (consider de-rating)

Stock Conditions

+10°C to +60°C

relative humidity ≤ 75% yearly average,

without dew, maximum value for 30 days-95%

Vibration Resistance

2 hrs. in each axis

10 - 55 - 10Hz at 1.5mm amplitude

Solderability

235°C, 3 sec. (IEC 60068-2-58)

Soldering Heat Resistance

260°C, 10 sec. (IEC 60068-2-58)

Minimum Cross Section, Copper

Conducting path - 0.1mm² (417) / 0.2mm² (418)

Path thickness - 0.035mm (417) / 0.07mm (418)

Mounting

Solder the fuse with the marked side facing up

Avoid circuit traces below the fuse

Marking

, Current Rating

Unit Weight

0.23g (approx.)

Permissible continuous operating current is ≤ 70% at ambient temperature of 23°C (73.4°F).

Rated Current No. 417	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop $1.0 \times I_{\text{Rated}}$ max. (mV)	Power Dissipation $1.0 \times I_{\text{Rated}}$ max. (mW)	Melting Integral $10 \times I_{\text{Rated}}$ max. (A ² s)	Approvals UR CSA
400mA	0400	125V		440	180	0.031	• •
500mA	0500	125V		420	210	0.036	• •
630mA	0630	125V		400	255	0.05	• •
800mA	0800	125V		350	280	0.17	• •
1.00A	1100	125V	50A / 125VAC	200	200	0.2	• •
1.25A	1125	125V	50A / 60VDC	195	245	0.31	• •
1.60A	1160	125V	50-60Hz	190	305	0.53	• •
2.00A	1200	125V	cos φ = 1.0	185	370	0.95	• •
2.50A	1250	125V		180	450	1.5	• •
3.15A	1315	125V		175	555	2.6	• •
4.00A	1400	125V		170	680	4.5	• •
5.00A	1500	125V		150	750	8.1	• •
No. 418 for short circuit back-up protection							
6.30A	1630	75V	50A / 75VAC	100	630	14	• •
7.00A	1700	75V	50A / 60VDC	95	665	16	• •
8.00A	1800	75V	50-60Hz	90	720	18	• •
10.00A	2100	75V	cos φ = 1.0	85	850	24	• •

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging

WebSite: www.wickmann.com

000801 FaxBack: +1 (404) 699-6176

• Europe Tel: +49 (2302) 662-107

E-mail: sales@wickmann.com

• Americas Tel: +1 (404) 699-7820


E-mail: service@wickmannusa.com

• Asia Tel: +852 26 14-1108

E-mail: sales@wickmann.com.hk

[查询"417"供应商](#)

SMQ / No. 417

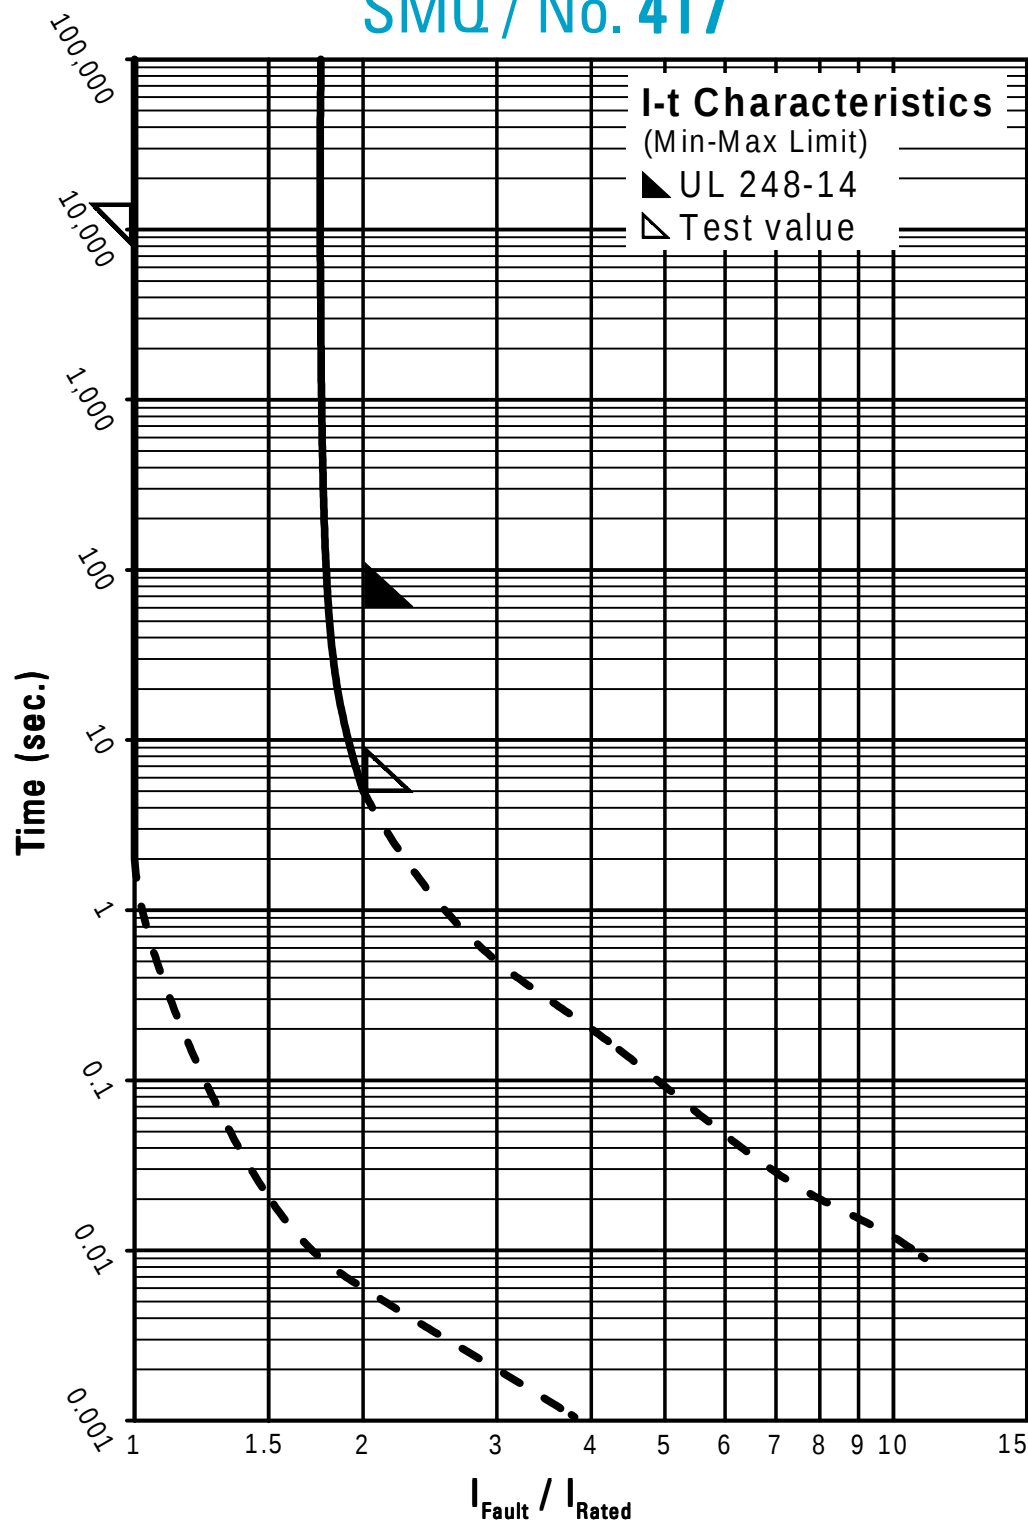

Contact WICKMANN for individual I-t curves