


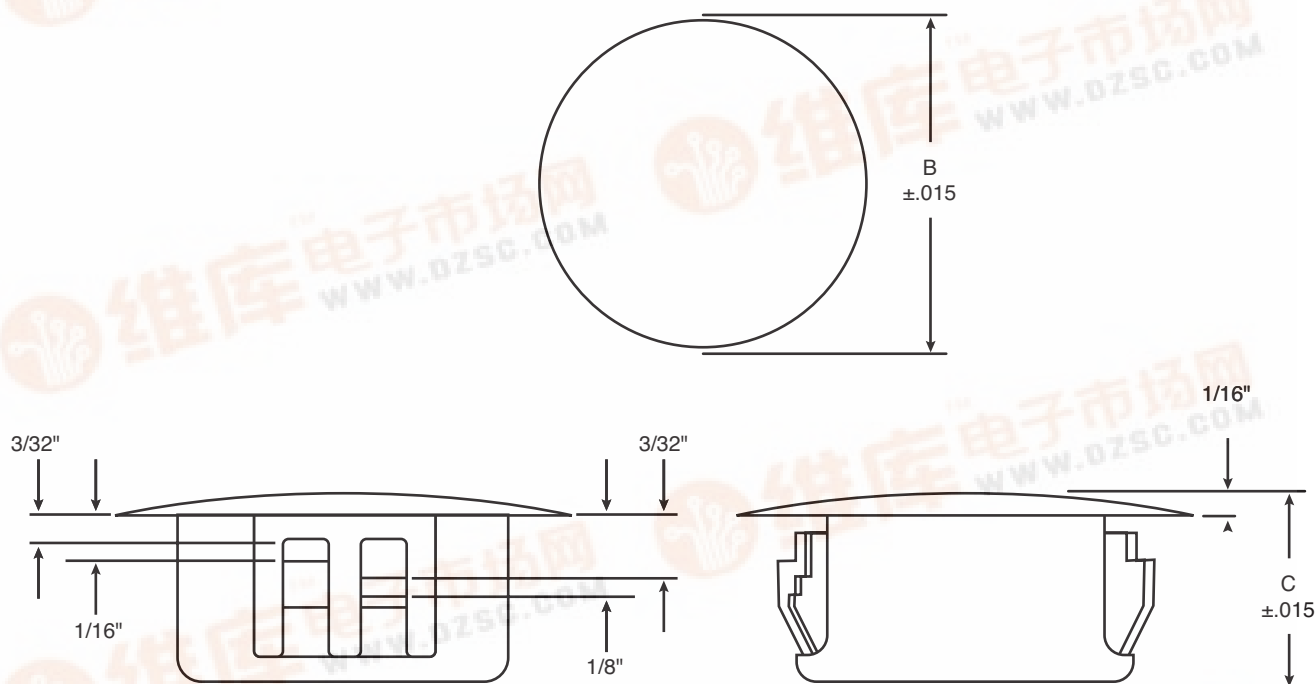

Dimensions: In

- Molded in a gray nylon to blend in with galvanized steel
- Economical plugs lock firmly into 5 trade size holes with thicknesses up to 1/8"
- Installs with fingertip pressure - no tools required

| SPECIFICATIONS |                       |               |                |                      |             |
|----------------|-----------------------|---------------|----------------|----------------------|-------------|
| Mouser Num.    | Description           | Hole Diameter | Max. Thickness | Head Dia. B: In (mm) | Thickness C |
| 561-0875KOP    | 7/8" Knock Out Plug   | .875          | .125           | 1.016 (25.81)        | .453        |
| 561-1093KOP    | 1 1/8" Knock Out Plug | 1.093         | .125           | 1.218 (30.94)        | .453        |
| 561-1375KOP    | 1 3/8" Knock Out Plug | 1.375         | .125           | 1.5 (38.1)           | .453        |
| 561-1750KOP    | 1 3/4" Knock Out Plug | 1.75          | .125           | 1.925 (48.9)         | .453        |
| 561-2000KOP    | 2" Knock Out Plug     | 2             | .125           | 2.14 (54.36)         | .453        |