

- ▶ **Medical Instrumentation**
- ▶ **HVAC**
- ▶ **Process Control**
- ▶ **Vacuum Measurement**
- ▶ **Air Flow Management**



PERFORMANCE SPECIFICATIONS

Supply Current: 1.5mA
Ambient Temperature: 25°C (Unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Full Scale Output Span	75	100	150	mV	
Full Scale Output Span (2 psi version)	30		60	mV	
Zero Pressure Output			2	±mV	
Pressure Non-linearity		0.05	0.10	±% Span	1
Pressure Hysteresis		0.01	0.05	±% Span	
Input & Output Resistance	2500	4400	6000	Ω	
Temperature Error – Span		0.3	0.5	±% Span	2
Temperature Error – Zero		0.1	0.5	±% Span	1, 2
Thermal Hysteresis – Span		0.1		±% Span	2
Thermal Hysteresis – Zero		0.1		±% Span	2
Supply Current		1.5	2.0	mA	3
Response Time		1.0		msec	4
Output Noise		1.0		μV p-p	5
Output Load Resistance	2			MΩ	
Insulation Resistance (50 VDC)	50			MΩ	6
Pressure Overload			3X	Rated	7
Operating Temperature	-40°C to +125°C				
Storage Temperature	-50°C to +150°C				
Acceleration	50g Max				
Shock	1000g Peak for 0.5 mS				
Vibration	20g Peak at 10 to 2000 Hz				
Media	Non-Corrosive Gases				8
Weight	3 Grams				

- Notes
1. Best Fit Straight Line. For 2 psi output span is 30-60 mV and TC zero temperature error is ±1.25%.

2. Temperature range 0-50°C in reference to 25°C.

3. Guarantees input/output ratiometricity.

4. For a zero-to-full scale pressure step change.


5. 10 Hz to 1 kHz.

6. Between case and sensing element.


7. 3X not to exceed 500 psi on ranges: 0-10 psi to 0-250 psi; 20 psi for 2 psi and 5 psi versions.

8. For Top Entry versions, wetted materials are silicon, aluminum, gold, RTV, glass, and nickel. For Bottom Entry versions, wetted materials are silicon, RTV, gold, and glass.

CONNECTIONS

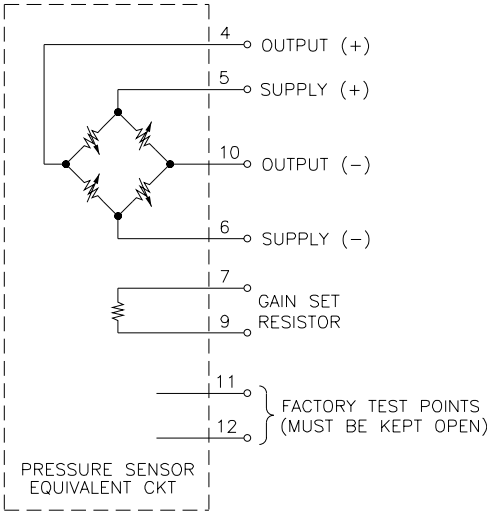

ORDERING INFORMATION



APPLICATION SCHEMATIC

