MC 1,5/2-G-3,5" 查询1803277"供应商

Headers,
plug-in direction parallel to the p.c.b.
Pitch 3.5 or 3.81

	I [A]	U [V]
Connection data	8	160

Description	No. of positions	Dim. a [mm]	Type	Order No.	Pcs. Pkt.
Headers, 3.5 mm pitch, with and without threaded flange, color: green,	2	3.5	**MC 1,5/2-G-3,5**	**18 44 21 0**	50
	3	7	**MC 1,5/3-G-3,5**	**18 44 22 3**	
	4	10.5	**MC 1,5/4-G-3,5**	**18 44 23 6**	
	5	14	**MC 1,5/5-G-3,5**	**18 44 24 9**	
	6	17.5	**MC 1,5/6-G-3,5**	**18 44 25 2**	
	7	21	**MC 1,5/7-G-3,5**	**18 44 26 5**	
	8	24.5	**MC 1,5/8-G-3,5**	**18 44 27 8**	
	9	28	**MC 1,5/9-G-3,5**	**18 44 28 1**	
	10	31.5	**MC 1,5/10-G-3,5**	**18 44 29 4**	
	11	35	**MC 1,5/11-G-3,5**	**18 44 30 4**	
	12	38.5	**MC 1,5/12-G-3,5**	**18 44 31 7**	
	13	42	MC 1,5/13-G-3,5	18 44 32 0	
	14	45.5	**MC 1,5/14-G-3,5**	**18 44 33 3**	
	15	49	MC 1,5/15-G-3,5	18 44 34 6	
	16	52.5	**MC 1,5/16-G-3,5**	**18 44 35 9**	
	17	56	MC 1,5/17-G-3,5	18 44 36 2	
	18	59.5	MC 1,5/18-G-3,5	18 44 37 5	
	19	63	MC 1,5/19-G-3,5	18 44 38 8	
	20	66.5	MC 1,5/20-G-3,5	18 44 39 1	
Headers, 3.81 mm pitch, with and without threaded flange, color: green,	2	3.81	**MC 1,5/2-G-3,81**	**18 03 27 7**	50
	3	7.62	**MC 1,5/3-G-3,81**	**18 03 28 0**	
	4	11.43	**MC 1,5/4-G-3,81**	**18 03 29 3**	
	5	15.24	**MC 1,5/5-G-3,81**	**18 03 30 3**	
	6	19.05	**MC 1,5/6-G-3,81**	**18 03 31 6**	
	7	22.86	**MC 1,5/7-G-3,81**	**18 03 32 9**	
	8	26.67	**MC 1,5/8-G-3,81**	**18 03 33 2**	
	9	30.48	**MC 1,5/9-G-3,81**	**18 03 34 5**	
	10	34.29	**MC 1,5/10-G-3,81**	**18 03 35 8**	

查询"1803277"供应商

11	38.10	**MC 1,5/11-G-3,81**	**18 03 36 1**
12	41.91	**MC 1,5/12-G-3,81**	**18 03 37 4**
13	45.72	MC 1,5/13-G-3,81	18 03 38 7
14	49.53	**MC 1,5/14-G-3,81**	**18 03 39 0**
15	53.34	MC 1,5/15-G-3,81	18 03 40 0
16	57.15	**MC 1,5/16-G-3,81**	**18 03 41 3**
17	60.96	MC 1,5/17-G-3,81	18 41 30 7
18	64.77	MC 1,5/18-G-3,81	18 41 29 7
19	68.58	MC 1,5/19-G-3,81	18 41 28 4
20	72.39	MC 1,5/20-G-3,81	18 41 27 1

Accessories

(1) **Coding section,** is inserted into the slot on the header, red insulating material		**CP-MSTB**	**17 34 63 4** 100
(2) **Marker card,** with 14 pcs., 10-section marker strips, white, self-adhesive, for 140 terminal blocks		**SK 3,5/2,8 or SK 3,81/2,8** (see info 1, info 2)	

Technical data

Dimensions			see description	
Pitch	[mm]		3.5 / 3.81	
Pin dimensions	[mm] x [mm]		0.8 x 0.8	
Hole diameter	[mm]		1.2	
Technical data in accordance with IEC / DIN VDE				
Insulation material group	–		IIIa	
Surge voltage category / contamination class	–/–	III / 3	III / 2	II / 2
Rated voltage	[V]	160	160	250
Rated surge voltage	[kV]	2.5	2.5	2.5
Nominal current	[A]		8	
Maximum load current per position	[A]		8	
Insulation material			PBT	
Inflammability class acc. to UL 94			V0	
Temperature indices RTI/Ti			140/120	
Approval data (UL and CSA)				
Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG		300 / 8 / –	
	CSA: [V] / [A] / AWG		300 / 8 / –	

Note:
Only actuate MINI-COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available on request.

Articles printed in bold can be delivered at short notice.
Products with black or gray housing available on request.

Drilling diagrams see info.

Dimensional drawing

查询"1803277"供应商

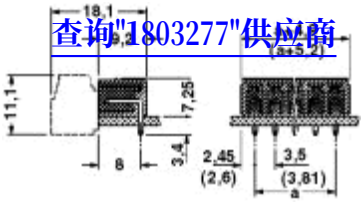
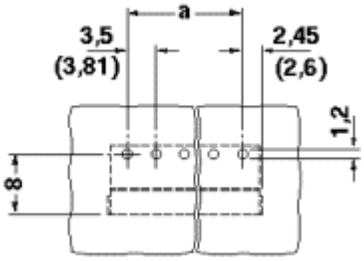
Drilling diagram