

NEW Product

- 26 A output current
- 12 V input voltage
- Wide-output voltage adjust
 - 1.2 Vdc to 5.5 Vdc for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'
- Auto-track™ sequencing*
- Margin up/down controls
- Efficiencies up 94.5%
- Output ON/OFF inhibit
- Output voltage sense
- Point-of-Load-Alliance (POLA) compatible
- Available RoHS compliant



2 YEAR WARRANTY

The PTH12030 is a next generation series of non-isolated dc-dc converters offering some of the most advanced POL features available in the industry. The primary new feature provides for sequencing between multiple modules, a function, which is becoming a necessity for powering advanced silicon including DSP's, FPGA's and ASIC's requiring controlled power-up and power-down. Other industry leading features include margin up/down controls and efficiencies up to 94.5%. The PTH12030 has an input voltage of 10.2 Vdc to 13.8 Vdc and offers a wide output voltage range adjustable with external trim resistor, allowing for maximum design flexibility and a pathway for future upgrades.

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated
 $C_{in} = 560 \mu F$, $C_{out} = 0 \mu F$

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability (See Note 4)	Suffix 'W' Suffix 'L'	1.2-5.5 Vdc 0.8-1.8 Vdc
Setpoint accuracy		±2.0% Vo
Line regulation		±5 mV typ.
Load regulation		±5 mV typ.
Total regulation		±3.0% Vo
Minimum load		0 A
Ripple and noise 20 MHz bandwidth (See Note 8)	Suffix 'W' Suffix 'L'	25 mV pk-pk 15 mV pk-pk
Temperature co-efficient	-40 °C to +85 °C	±0.5% Vo
Transient response (See Note 5)		50 µs recovery time Overshoot/undershoot 150 mV
Margin adjustment		±5.0% Vo

INPUT SPECIFICATIONS

Input voltage range	(See Note 3)	10.2-13.8 Vdc
Input current	No load	10 mA typ.
Remote ON/OFF	(See Note 1)	Positive logic
Start-up time		1 V/ms
Undervoltage lockout		8.5-9.5 V typ.
Track input voltage	Pin 11 (See Note 6)	±0.3 Vin

EMC CHARACTERISTICS

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

GENERAL SPECIFICATIONS

Efficiency	See Tables on page 2	
Insulation voltage	Non-isolated	
Switching frequency	Over Vin and Io ranges	575 kHz typ.
Approvals and standards (pending)	EN60950 UL/cUL60950	
Material flammability	UL94V-0	
Dimensions	(L x W x H)	34.80 x 28.45 x 9.00 mm 1.370 x 1.120 x 0.354 in
Weight	7 g (0.25 oz)	
MTBF	Telcordia SR-332	2,821,000 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Note 2)	Operating ambient, temperature Non-operating	-40 °C to +85 °C -40 °C to +125 °C
MSL ('Z' suffix only)	JEDEC J-STD-020C	Level 3

PROTECTION

Short-circuit	Auto reset	40 A typ.
Thermal	Auto recovery	

International Safety Standard Approvals

UL/cUL CAN/CSA-C22.2 No. 60950-1-03/UL 60950-1,
File No. E174104

TUV Product Service (EN60950) Certificate No. B 04 06 38572 044
CB Report and Certificate to IEC60950, Certificate No.
US/8292/UL

*Auto-track™ is a trade mark of
Texas Instruments

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (MAX.)	REGULATION		MODEL NUMBER ^(9,10)
						LINE	LOAD	
143 W	10.2-13.8 Vdc	0.8-1.8 Vdc	0 A	26 A	89.0%	±5 mV	±5 mV	PTH12030L
143 W	10.2-13.8 Vdc	1.2-5.5 Vdc	0 A	26 A	94.5%	±5 mV	±5 mV	PTH12030W

Part Number System with Options

PTH12030WAST

Product Family
Point of Load Alliance
Compatible

Input Voltage
12 = 12 V

Output Current
03 = 26 A

Mechanical Package
Always 0

Packaging Options
No Suffix = Trays
T = Tape and Reel ⁽⁸⁾

Mounting Option ⁽⁹⁾
D = Horizontal Through-Hole (Matte Sn)
H = Horizontal Through-Hole (Sn/Pb)
S = Surface-Mount (63/37 Sn/Pb pin solder material)
Z = Surface-Mount (96.5/3.0/0.5 Sn/Ag/Cu pin solder material)

Pin Option
A = Through-Hole Std. Pin Length (0.140")
A = Surface-Mount Tin/Lead Solder Ball

Output Voltage Code
W = Wide, L = Low Voltage

Output Voltage Adjustment of the PTH12030 Series

The ultra-wide output voltage trim range offers major advantages to users who select the PTH12030. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 1.2 Vdc to 5.5 Vdc for suffix 'W' and 0.8 Vdc to 1.8 Vdc for suffix 'L'. When the PTH12030 converter leaves the factory the output has been adjusted to the default voltage of 1.2 V for the PTH12030W and 0.8V for the PTH12030L.

EFFICIENCY TABLE - PTH12030W ($I_o = 18$ A)

OUTPUT VOLTAGE	EFFICIENCY
Vo = 5.0 V	94.5%
Vo = 3.3 V	92.7%
Vo = 2.5 V	91.4%
Vo = 2.0 V	90.3%
Vo = 1.8 V	89.5%
Vo = 1.5 V	88.2%
Vo = 1.2 V	86.2%

EFFICIENCY TABLE - PTH12030L ($I_o = 18$ A)

OUTPUT VOLTAGE	EFFICIENCY
Vo = 1.8 V	89%
Vo = 1.5 V	87%
Vo = 1.2 V	85%
Vo = 1.0 V	83%
Vo = 0.8 V	80%

Notes

- Remote ON/OFF. Active High
ON: Pin 4 open; or $V > V_{in} - 0.5$ V
OFF: Pin 4 GND; or $V < 0.8$ V (min - 0.2 V).
- See Figure 1 for safe operating curve of the PTH12030W and Figure 4 for safe operating curve of PTH12030L.
- A 560 μ F electrolytic input capacitor is required for proper operation. The capacitor must be rated for a minimum of 800 mA rms of ripple current.
- An external output capacitor is not required for basic operation. Adding 330 μ F of distributed capacitance at the load will improve the transient response.
- 1 A/ μ s load step, 50 to 100% $I_{o,max}$, $C_{out} = 330$ μ F.
- If utilized Vout will track applied voltage by ± 0.3 V (up to Vo set point).
- Tape and reel packaging only available on the surface-mount versions.
- The pk-pk output ripple voltage is measured with an external 10 μ F ceramic capacitor. See Figure 3 Standard application schematic on the following page.
- To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTH12030WAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTH12030WAD.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

PTH12030W Characteristic Data

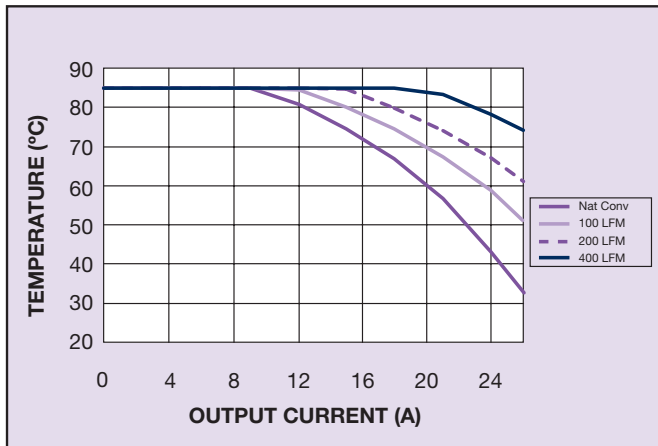


Figure 1 - Safe Operating Area
Vin = 12 V, Output Voltage = 3.3 V (See Note A)

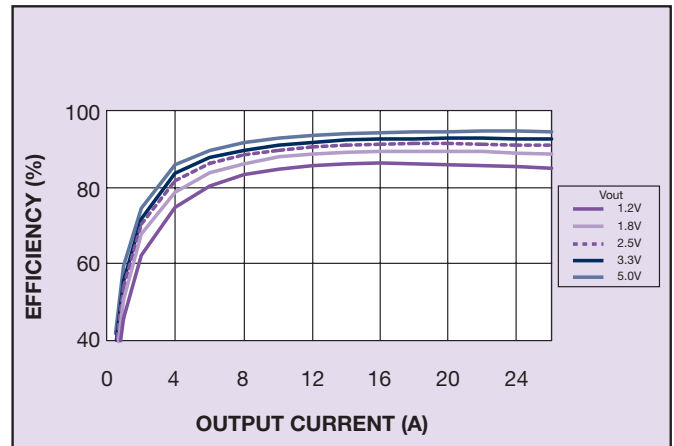


Figure 2 - Efficiency vs Load Current
Vin = 12 V (See Note B)

PTH12030L Characteristic Data

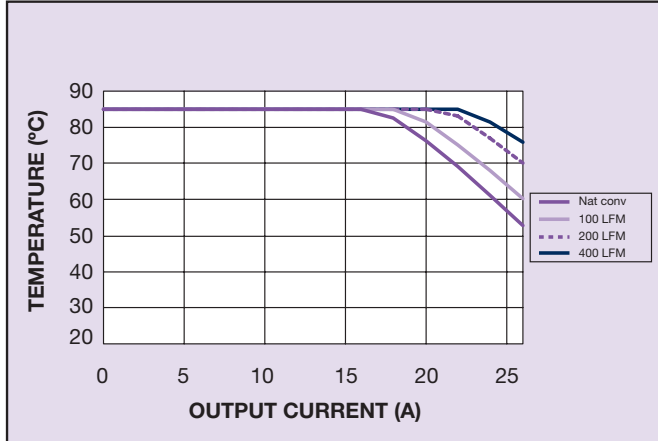


Figure 3 - Safe Operating Area for PTH12030L
Vin = 12 V, Output Voltage ≤ 1.8 V (See Note A)

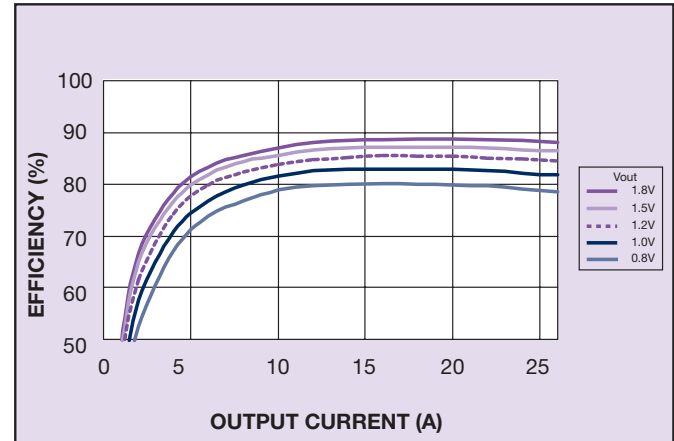


Figure 4 - Efficiency vs Load Current for PTH12030L
Vin = 12 V (See Note B)

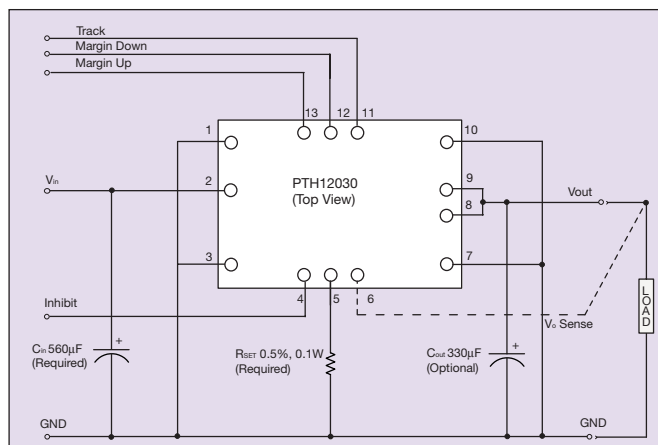


Figure 5 - Standard Application - All Models

Notes

- A** SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

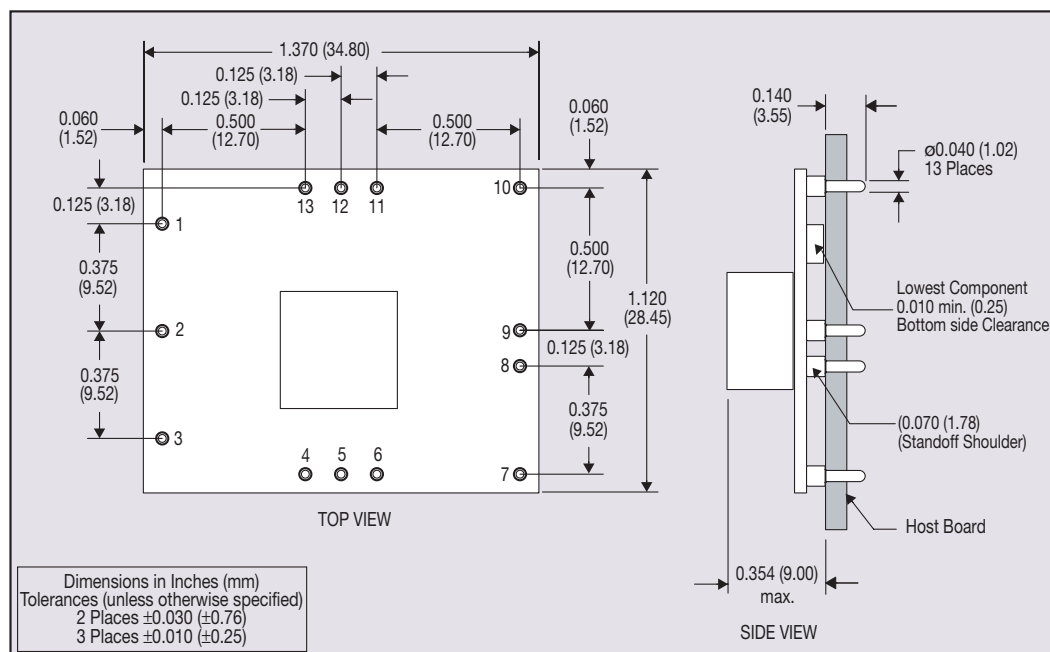


Figure 6 - Plated Through-Hole Mechanical Drawing

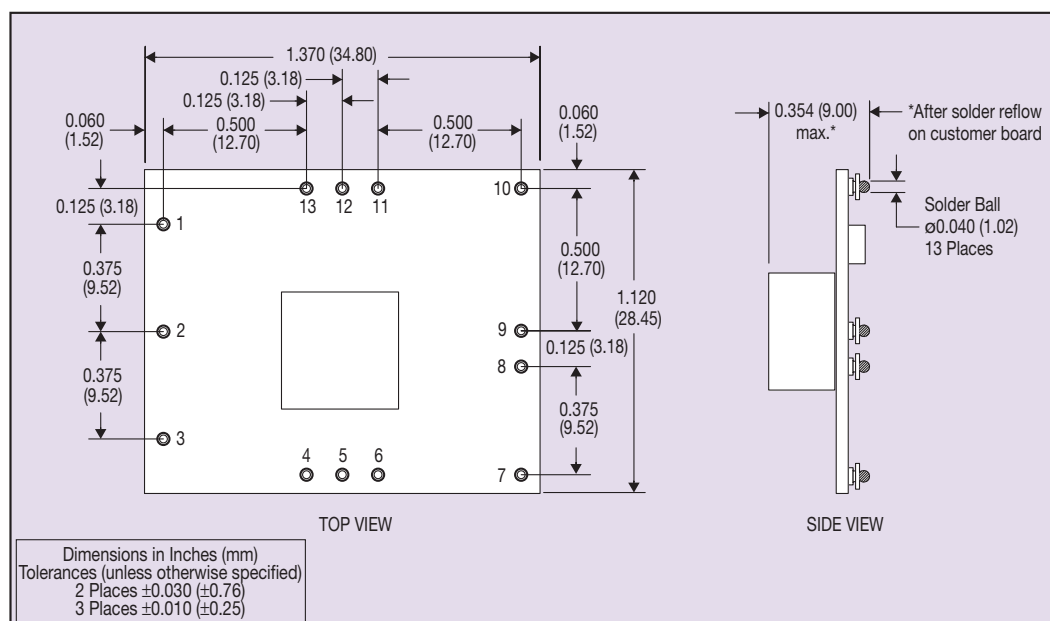


Figure 7 - Surface-Mount Mechanical Drawing

PIN CONNECTIONS	
PIN NO.	FUNCTION
1	Ground
2	Vin
3	Ground
4	Inhibit*
5	Vo adjust
6	Vo sense
7	Ground
8	Vout
9	Vout
10	Ground
11	Track
12	Margin down*
13	Margin up*

*Denotes negative logic:
Open = Normal operation
Ground = Function active

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn