COMPONENTS PRODUCT INFORMATION






LVDS Transmission Connector

FI-E Series

CONNECTOR MB-0102-2 December 2003

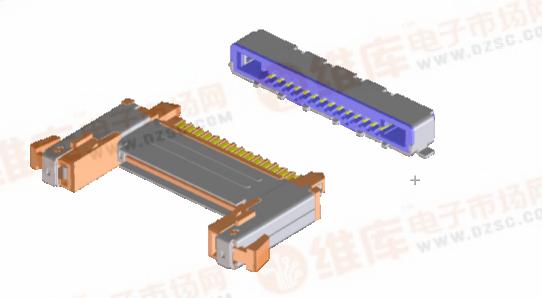

<<Outline>>

Along with digitalization trends, cases where LVDS (Low Voltage Differential Signaling) is used for internal wiring in consumer products such as TVs are increasing. JAE has developed a connector that combines both electrical considerations for LVDS transmission and mechanical considerations for TV interiors.

Features

- ■Connector optimal for LVDS (Performance equal to FFX connector series).
- ■Sufficient guide alignment and durability to permit blind mating.
- Mechanical lock available to prevent incomplete or inadequate mating.
- Low profile design with 3.2mm height when mounted.
- ■Crimp-style and solder-style available for harness-side. Crimp contact common to FI-X series.

General Specifications

- ■No. of contacts: 14 pos., 30 pos.
- ■Contact resistance: 40m ohm max.
- ■Withstanding voltage: AC500Vr.m.s

per minute

■Operating temperature: -40 Deg. C to

+80 Deg. C

- ■Rated current: AC,DC each 1A per 1pos.
- ■Rated voltage: AC,DC each 200V per 1pos.
- ■Insulation resistance: 100M ohm min.
- ■Pitch: 1mm



Materials and Finishes

FI-E**S (Board side)


Components	Materials and Finishes
Contact	Copper alloy/ Contact portion: Au Terminal portion: SnCu
Ground Plate	Copper alloy/ Tin plating
Insulator	Heat resistant plastic/ None
Shell	Stainless/ Tin plating

FI-E**C* (Cable side, soldering type)


Components	Materials and Finishes
Contact	Copper alloy/ Contact portion: Au Terminal portion: SnCu
Base shell	Copper alloy/ Tin plating
Insulator	Heat resistant plastic/ None
Lock spring	Stainless/ None

FI-E**H* (Cable side, crimp housing type)


Components	Materials and Finishes
Housing	Heat resistant plastic/ None
Shell	Copper alloy/ Tin-plating




Part Number	FI-E14S
SJ Drawing	SJ037690

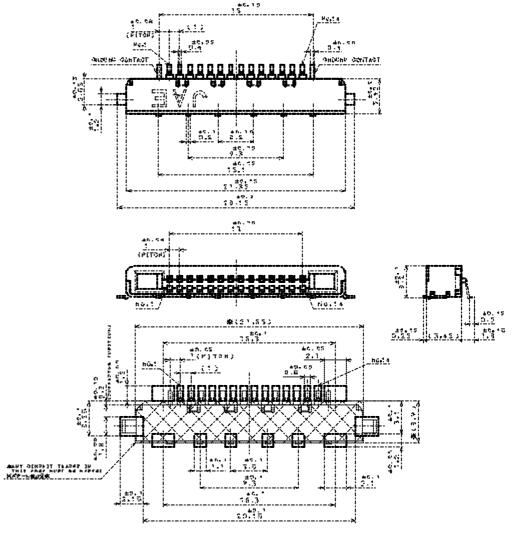


Applicable dimension of board (for reference)




Part Number	FI-E30S
SJ Drawing	SJ038770

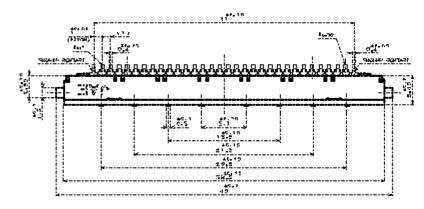






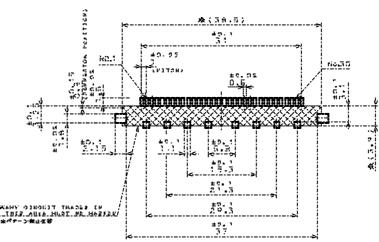


Applicable dimension of board _(for reference)




Modification code(None: Coaxial type 2: Discrete type)

Part Number	FI-E14C
SJ Drawing	SJ038723

* Connector is not sold individually.











Part Number	FI-E14C2
SJ Drawing	SJ038724

* Connector is not sold individually.











Modification code (None: Coaxial type


2: Discrete type)


Part Number	FI-E30C2	
SJ Drawing	SJ038773	

* Connector is not sold individually.

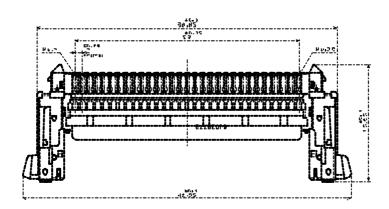





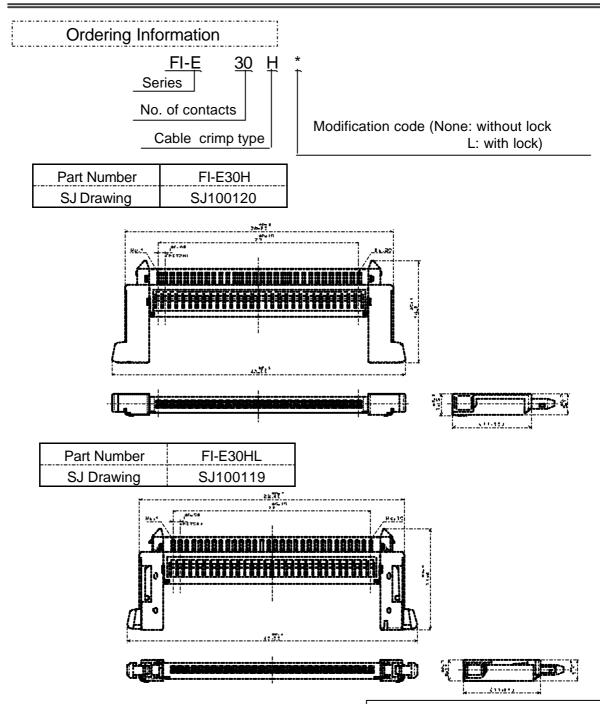

Japan Aviation Electronics Industry, Limited

Product Marketing Division Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539 Phone: +81-3-3780-2787 FAX: +81-3-3780-2946 **Notice:** Products shown in this leaflet are made for the applications listed below. However, if the above mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for life-support systems, or any other specific application requiring extremely high reliability, please contact JAE for further information.

Recommended applications: Computers, Office machines, Measuring devices, Telecommunication devices (Terminals, Mobile devices), AV devices, Household applications, FA devices, etc.

^{*} The specifications in this brochure are subject to change without notice. Please contact JAE for information. JAE PMK Div. Proprietary. Copyright © 2003, Japan Aviation Electronics Industry, Ltd.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download
Daily Updated Database
100% Free Datasheet Search Site
100% Free IC Replacement Search Site
Convenient Electronic Dictionary
Fast Search System

www.EEworld.com.cn