
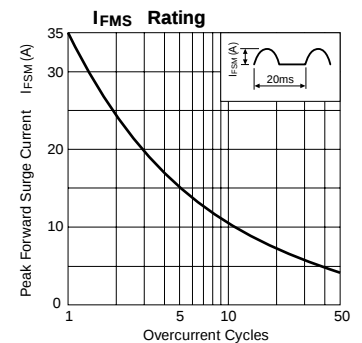
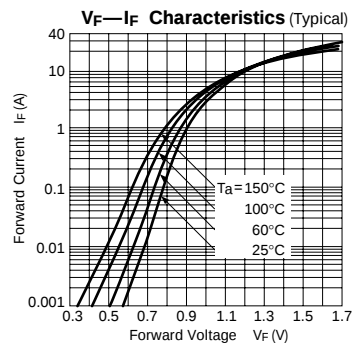


Rectifier Diodes




查询"EM1B"供应商

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25°C)				Others		
	V _{RM} (V)	I _{F (AV)} (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	R _{th} (j-ℓ)	Mass	Fig
			50Hz Half-cycle Sinewave Single Shot			max	I _F (A)	V _R = V _{RM} max	V _R = V _{RM} Ta = 100°C max	(°C/W)	(g)	
AM01Z	200	1.0	35	-40 to +150	0.98	1.0	10	50	22	0.13	Ⓐ	
AM01	400											
AM01A	600											
EM01Z	200	1.0	45		0.97	1.0			17	0.3	Ⓑ	
EM01	400											
EM01A	600											
EM 1Y	100	1.0	45		0.97	1.0	20	100			Ⓒ	
EM 1Z	200											
EM 1	400											
EM 1A	600											
EM 1B	800											
EM 1C	1000											




AM01 series



EM01 series

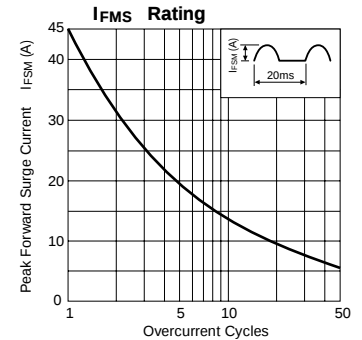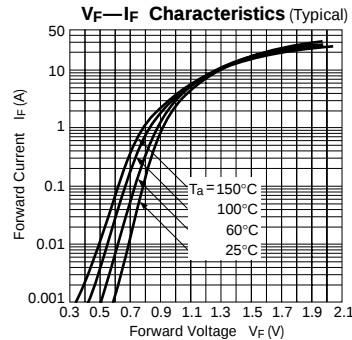

EM 1 series

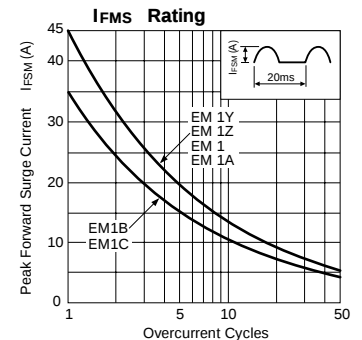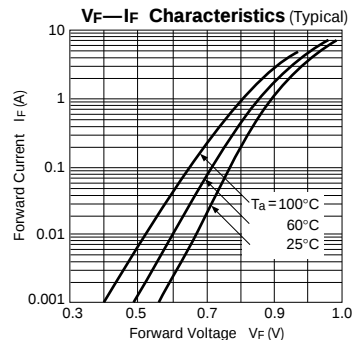

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

