
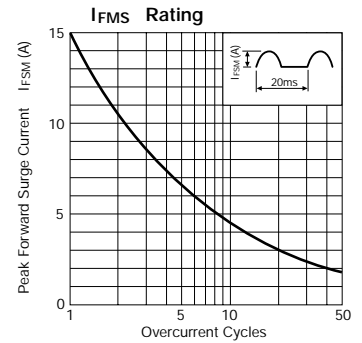
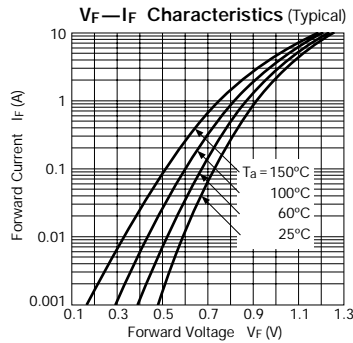


Fast-Recovery Rectifier Diodes




查询"EU2"供应商

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others		
		VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA) VR=VRM Ta=100°C max	trr (1) (μs)		trr (2) (μs)		Rth (j-ℓ) (°C/W)	Mass (g)
							max	IF (A)			IF/IRP (mA)	IF/IRP (mA)				
EU 2Z	200	1.0	15	-40 to +150	1.4	1.0	10	300	0.4	10/10	0.18	10/20	17	0.3	Ⓐ	
EU 2	400															
EU 2A	600															
EU 2YX	100	1.2	25		0.9	1.2	0.2	0.08	Ⓑ							
RF 1Z	200	0.6	15		2.0	0.6	10	200		0.4	10/10	0.18	10/20	15		0.4
RF 1	400															
RF 1A	600															
RF 1B	800															




EU 2 series



EU 2YX

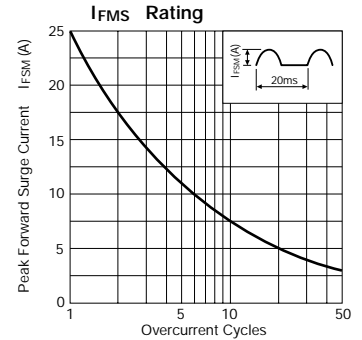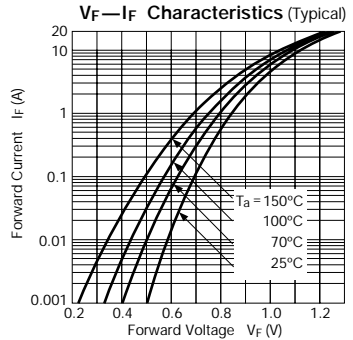

RF 1 series

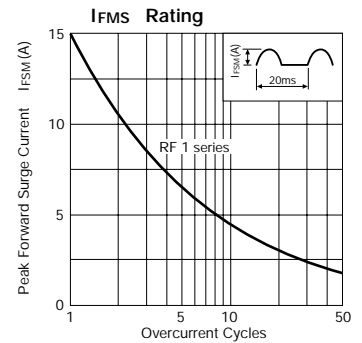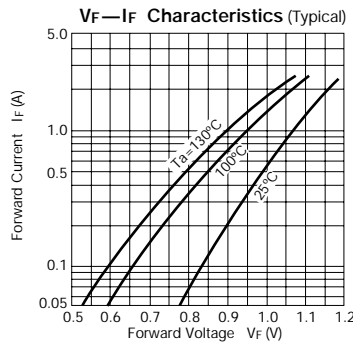

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

