


## Model 5301 & 5521 SMD Grabber® Test Clip Patch Cord

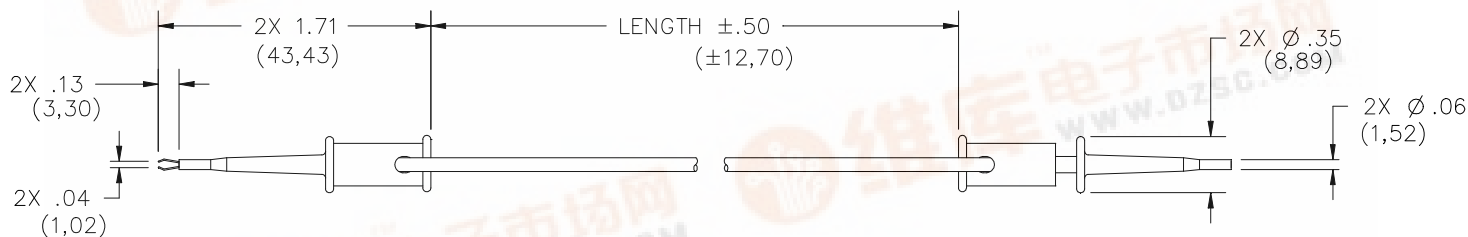

### FEATURES:

- Ideal for providing a temporary jumper wire between surface mount devices.

### MATERIALS:

SMD Grabber® test clip

Contact - Stainless Steel

Spring – Stainless Steel

Cap – Glass filled nylon. Color matches color of wire

Barrel – Glass filled nylon. Color matches color of wire

Marking: “POMONA GRABBER®”

Finish: Gold plated

Wire: 22 AWG, PVC insulated

Marking: “Model 5301”

### RATINGS:

Operating Temperature: +102°C (+216°F) Max.

Voltage: Hand-held testing 33 Vrms/70 Vdc Max.

Hands free testing in controlled voltage environments: 150 WVDC Max.

Current: .5 Amperes

### ORDERING INFORMATION: Model 5301-XX-\*

XX = Standard Lengths in Inches, 12” and 24”

\* = Color, -0 Black, -2 Red

Ordering Example: 5301-12-2 Indicates 12”, color is red.

5521 Kit contains 10 pieces of model 5301-24, 1 each of 10 colors.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ ” (.51 mm), .xxx =  $\pm .005$ ” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

D1094390  
Rev. 100

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
For “Where to Buy” information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)