

查询"COB75W-48S3V"供应商

75 WATT 4:1 INPUT RANGE DC-DC CONVERTERS



Features

- 75W Isolated Output
- Quarter-Brick Package
- Efficiency Up to 87%
- 4 : 1 Input Range
- Continuous Short Circuit Protection



NEW

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	SIZE
			MIN.	MAX.	NO LOAD	FULL LOAD		
CQB75W-24S3V3	9-36 VDC	3.3 VDC	0mA	12 A	50mA	2037mA	81	Quarter-Brick
CQB75W-24S05	9-36 VDC	5.0 VDC	0mA	12 A	50mA	2976mA	84	Quarter-Brick
CQB75W-24S12	9-36 VDC	12 VDC	0mA	6.25 A	50mA	3634mA	86	Quarter-Brick
CQB75W-24S15	9-36 VDC	15 VDC	0mA	5 A	50mA	3634mA	86	Quarter-Brick
CQB75W-24S24	9-36 VDC	24 VDC	0mA	3.12 A	50mA	3628mA	86	Quarter-Brick
CQB75W-48S3V3	18-75VDC	3.3 VDC	0mA	12 A	30mA	1006mA	82	Quarter-Brick
CQB75W-48S05	18-75VDC	5.0 VDC	0mA	12 A	30mA	1471mA	85	Quarter-Brick
CQB75W-48S12	18-75VDC	12 VDC	0mA	6.25 A	30mA	1817mA	86	Quarter-Brick
CQB75W-48S15	18-75VDC	15 VDC	0mA	5 A	30mA	1796mA	87	Quarter-Brick
CQB75W-48S24	18-75VDC	24 VDC	0mA	3.12 A	30mA	1796mA	87	Quarter-Brick

NOTE: 1. Nominal Input Voltage 24, 48 VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	24V.....	9-36V.....
	48V.....	18-75V.....
Under voltage lockout	24Vin power up	8.8V.....
	24Vin power down	8.0V.....
	48Vin power up	17V.....
	48Vin power down	16V.....
Positive Logic Remote ON/OFF (see note 4 & 5)		
Input Filter		PI Type.....


OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.5% max.
Transient Response :75% to 100% Step Load Change	
Error Band	±5% Vout
Recover Time	<500µS
External Trim Adj. Range	±10%
Ripple & Noise, 20MHz BW	
3.3V & 5V	40mV RMS, max.
	100mV pk-pk, max.
12V & 15V	60mV RMS, max.
	150mV pk-pk, max.
24V	100mV RMS, max.
	240mV pk-pk, max.
Temperature Coefficient	±0.03%/°C
Short Circuit Protection	Continuous
Line Regulation ¹	±0.2% max.
Load Regulation ²	±0.2% max.
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	110% ~140% Nominal Output

GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage	Input/Output..... 1500VDC min.
	Input/Case..... 1500VDC min.
	Output/Case..... 1500VDC min.
Isolation Resistance	10 ⁹ ohm min.
Switching Frequency	300KHz, Typ.
Operating Case Temperature	-40°C to +100°C
Storage Temperature	-55°C to +105°C
Thermal Shutdown, Case Temp.	+105°C Typ.
Dimensions.....	1.45 x 2.28 x 0.50 inches(36.8 x 57.9 x 12.7 mm)
Case Material	Aluminum Base-plate with Plastic Case
Weight.....	TBD

External Output Trim

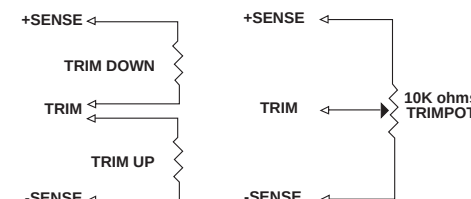

PIN CONNECTION


<i>Pin</i>	<i>Function</i>
1	+V Input
2	ON/OFF
3	-V Input
4	-V Output
5	-Sense
6	Trim
7	+Sense
8	+Vout

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to Zero Load
3. Output Ripple and Noise measured with 10uF tantalum and 1uF Ceramic capacitor across output
4. Logic Compatibility Open Collector ref to -Input
 Module ON >3.5Vdc to 75Vdc or Open Circuit
 Module OFF < 1.8Vdc
5. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF
 Module ON < 1.8Vdc
 Module OFF >3.5Vdc to 75Vdc or Open Circuit

SIZE QB

All Dimensions In Inches(mm)
Tolerance Inches: x.xx= ± 0.02 , x.xxx= ± 0.010
 Millimeters: x.x= ± 0.5 , x.xx= ± 0.25

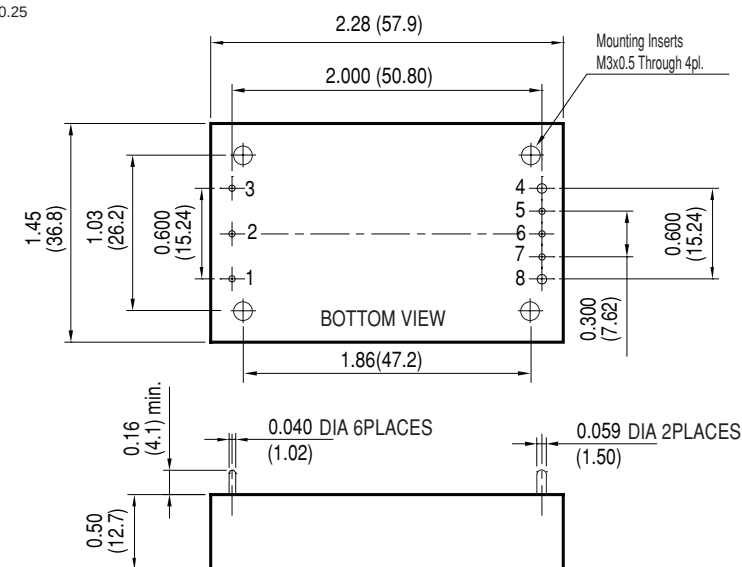

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.