Torqueleader TSC Calibrated and TSP Production Slipper Wrenches

A versatile new range of calibrated and production wrenches based on the proven Torqueleader 'slip free' principle.

TSC Models

Four models covering a torque range of 1 - 10 N.m and 10 - 90 lbf.ln.

TSC Calibrated Slipping Wrenches incorporate a micrometer-style fine adjustment with a positive locking system providing fast, easy and accurate setting.

Available with either ISO or imperial scales.

■ TSP Models


Two models covering a torque range of 1 - 10 N.m and 10 - 90 lbf.in.

TSP Pre-Set Slipping Wrenches are easily set on a Torqueleader TCA Torque Analyser. Adjustment is made using the new 'Double Positive' torque adjustment locking system, ensuring tamperproof setting reliability.

Automatic resetting

Automatic audible resetting when the wrench 'slips'. Completely eliminates the possibility of overtightening.

■ Non length dependent

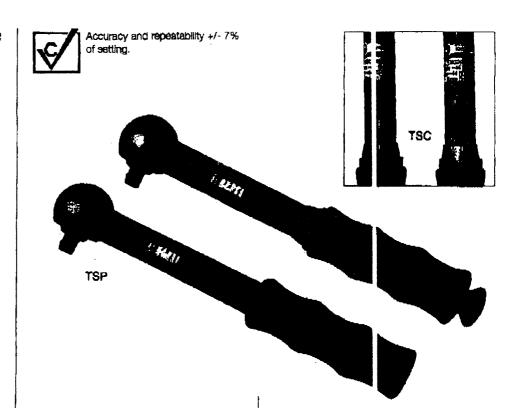

Accurate Repeatability

Accurate repeatability for equal tightness every time.

Fine ratchet head

Robust 1/4" square fine ratchet head with fully enclosed multi-lobe carn mechanism.

Rubber grips

Stainless steel heads with direction arrow, aircreft spec. aluminium handles and comfortable nitrile rubber grips with dust cape,

Low mair tenance

No special maintenar ce required.

Versatile

Designed to operate a any environment, from the toughest enginee and production line to the most delicate electric and electronic assembly areas.

Options

Available for anti-ctoc wise use on special request.

TSC Wrenches

MODEL	ORDERING CODE	- RANGE	INCREMENTS		mm	hu hu	om ∆	∆ oz	SQUARE DRIVE
TSC 5	056020	Fig. 1975		3.7	195	7.50	236	5.3	1/4" Ratchet
T8C 10	058040	4 .		<u>:</u> · ·	195	7.68	235	6.9	1/4" Flatuhet
TSC 45	030330	10 – 45 lbf.in	0.5 lbf.ln		195	7.66	235 .	8.3	1/4° Ratchet
TSC 90	058080	20 – 96 (bif.lin	1.0 lbf.jn	: '	195	7.68	236 ·	6.3	1/4" Ratchet

TSP Wrenches

MODEL	ORDERING		9	0		Δ	SQUARE DRIVE	
	CODE	Fa (c)	ib/.in	mm	ina	Dan A	æ	
TOP EVAE	056090		10 – 48	185	7.28	190	6.7	1/4" Retchet
TSP 10/90	055100		20 – 90	185	7.28	190	8,7	1/4* Ratchel