


查询"215-501-22-38"供应商

MARL

FEATURED PRODUCT

FILAMENT REPLACEMENT LEDs - T3 1/4

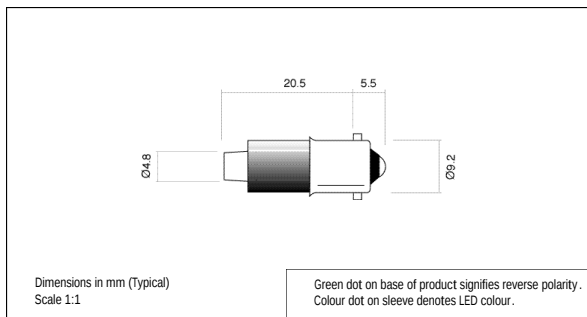

- Direct replacement for T3 1/4 BA9s
- Centre cathode polarity options
- Centre contact, anode as standard
- AC versions available



215 SERIES

MLQ = 20

Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH I p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
HIGH INTENSITY									
215-501-04-38	Red	Water Clear	1.9*	20	2750	660	Wide	-40 ~ +80	-40 ~ +80
215-521-04-38	Yellow		2.0*	20	4500	590			
215-532-04-38	Green		3.4*	20	6000	525			
215-930-04-38	Blue		3.4*	20	2000	470			
215-997-04-38	White		3.4*	20	3000	•			
215-501-20-38	Red		5/6	16	2750	660			
215-521-20-38	Yellow		5/6	15	4500	590			
215-532-20-38	Green		5/6	14	6000	525			
215-930-20-38	Blue		5/6	14	2000	470			
215-997-20-38	White		5/6	14	3000	•			
215-501-22-38	Red		24	20	2750	660			
215-521-22-38	Yellow		24	20	4500	590			
215-532-22-38	Green		24	20	6000	525			
215-930-22-38	Blue		24	20	2000	470			
215-997-22-38	White		24	20	3000	•			
UNITS				Vdc	mA	mcd			

* = Voltage DC for 20mA product is Vf@20mA, not Vopr

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K.
Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

Please note - This product is also available at 12, 28, 48, 60 and 110Vdc, 110 and 230Vac. Please contact our Sales department for further details.

FLAT-TOPPED LEDs FOR WIDE VIEWING ANGLE

Fax: +44 (0)1229 585155 • email: sales@marl.co.uk • website: www.marl.co.uk • website: www.marl-leds.com • Telephone +44 (0)1229 582430