



查询ECS-HFR-B供应

- ▶ Chip Type SMD Package
- ▶ RoHS Compliant (Note 7 Exemption)
- ▶ Built-in load capacitor
- ▶ Tape & Reel Packaging

ECS-HFR-B

更多型号与PCB打样加工, 24小时内加急出货

SMD CERAMIC RESONATOR

The ECS-HFR-B Series SMD ceramic resonator includes built in capacitors for reduced component count. The SMD Ceramic resonator is an excellent low cost frequency control solution when absolute frequency accuracy is not important.

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PART NUMBER *	FREQUENCY RANGE (MHz)	FREQUENCY ACCURACY @ 25°C (%)	FREQUENCY STABILITY -20 ~ +80°C (%)	AGING FOR TEN YEARS (%)	ESR (Ω) MAX.	BUILT-IN CAPACITANCE (C1 & C2)	IC
ECS-HFR-□□.□□-B	20.00 ~ 30.00	± 0.5	± 0.4	± 0.3	70	8 pF	1/6 TC74HCU04
ECS-HFR-□□.□□-B	30.10 ~ 50.00	± 0.5	± 0.3	± 0.3	60	8 pF	x2

Complete part number to include frequency i.e. ECS-HFR-20.00-B

PACKAGE DIMENSIONS (mm)

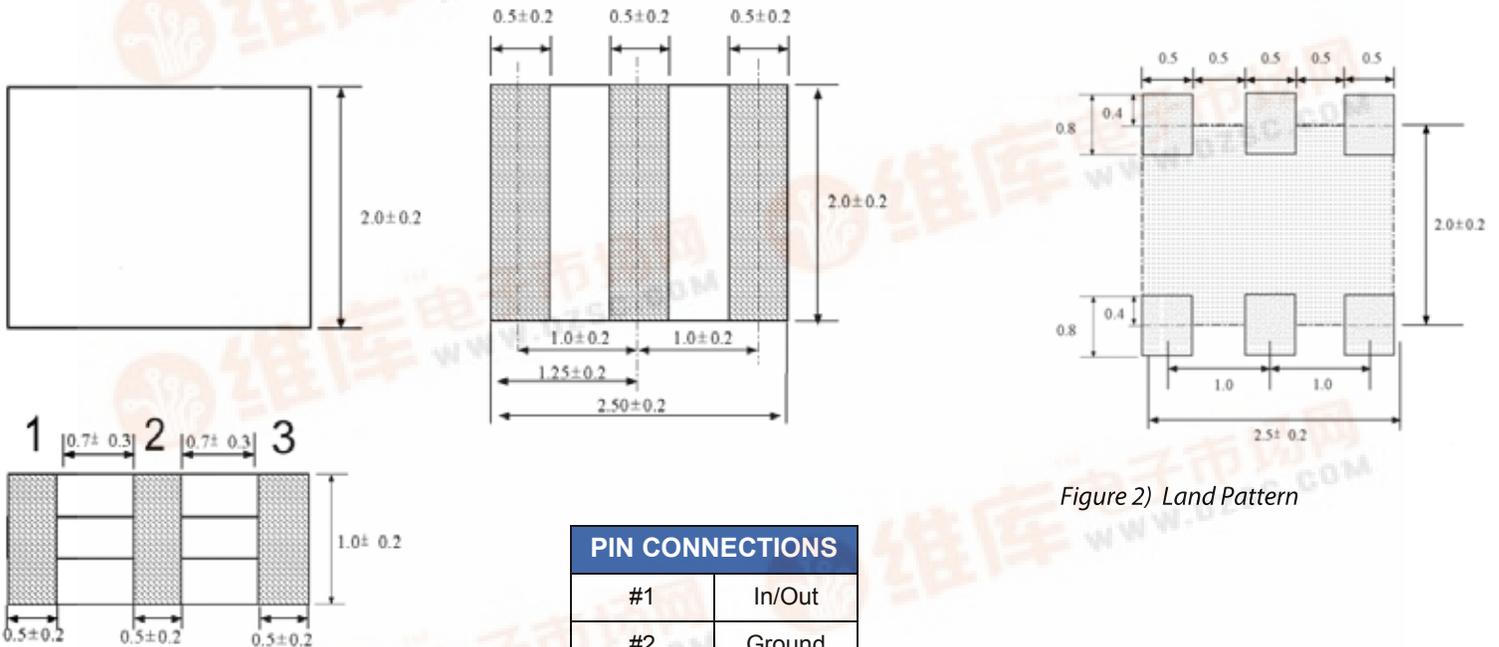


Figure 1) ECS-HFR-B Series - Top, Side and Bottom Views

Figure 2) Land Pattern

PART NUMBERING GUIDE: "Example" ECS-HFR-20.00-B-TR



ECS - Series

- Frequency

- Version

- Packaging

HFR = Chip Type

20.00 = 20.00 MHz

B = Built In Caps

TR = Tape & Reel