



Features

- Snap-in POTS splitter installation
- Accepts 3611, 3611-IDC, 3611A2 and 3631 POTS splitters
-  Listed per UL 1863
- Indoor or outdoor applications

7043 Series - POTS Splitter Enclosure

Bourns® Model 7043 Series simplifies the installation of DSL systems where there are no vacant positions in the installed NID. Bourns® 3611 and 3611-IDC for ADSL, 3611A2 for ADSL2+ or 3631 for VDSL POTS Splitters snap into the 7043 box at the subscriber premises. The weather-resistant enclosure is manufactured of high-impact resistant, ultraviolet desensitized, flame retardant material. A sectionalized grommet allows for wire entry and exit. The cover can be embossed with a company logo or other details.

How To Order

7043 - 0X - XX X

Model Number Designator _____

POTS Splitter Quantity _____

1 = One
0 = None (enclosure only)


POTS Splitter Type _____

A1 = ADSL Part Number 3611 / 3611-IDC* (see Special Options)
P1 = ADSL2+ Part Number 3611A2
V1 = VDSL Part Number 3631
0 = None

Special Options _____

I = IDC Connectors Part Number 3611-IDC

Product Dimensions

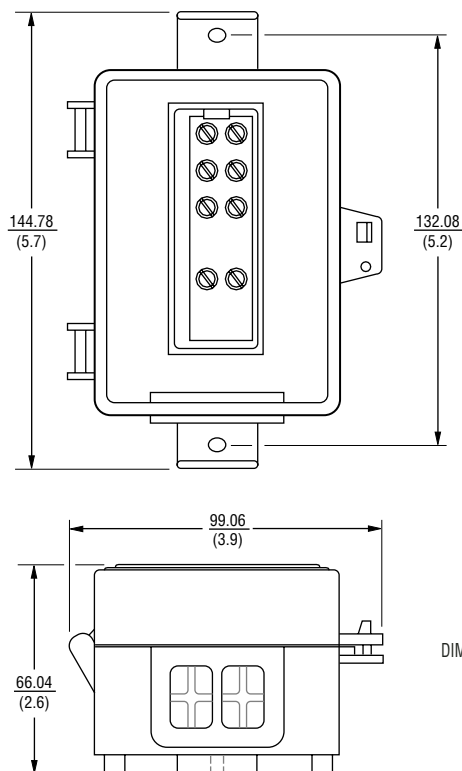

DIMENSIONS: $\frac{\text{MILLIMETERS}}{\text{(INCHES)}}$



Reliable Electronic Solutions

Asia-Pacific:

TEL +886- (0)2 25624117
FAX +886- (0)2 25624116

Europe:

TEL +41-41 7685555
FAX +41-41 7685510

The Americas:

TEL +1-951 781-5500
FAX +1-951 781-5700

www.bourns.com

REV. C 06/05

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.