Dual Schmitt-Trigger Inverter

The NL27WZ14 is a high performance dual inverter with Schmitt-Trigger inputs operating from a 1.65 to 5.5 V supply.

Pin configuration and function are the same as the NL27WZ04, but the inputs have hysteresis and, with its Schmitt trigger function, the NL27WZ14 can be used as a line receiver which will receive slow input signals. The NL27WZ14 is capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, it has a greater noise margin than conventional inverters. The NL27WZ14 has hysteresis between the positive-going and the negative-going input thresholds (typically 1.0 V) which is determined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.

- Designed for 1.65 V to 5.5 V V_{CC} Operation
- Over Voltage Tolerant Inputs and Outputs
- LVTTL Compatible Interface Capability with 5 V TTL Logic with $V_{CC} = 3 \text{ V}$
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- Current Drive Capability is 24 mA at the Outputs
- Chip Complexity: FET = 72




Figure 1. Pinout (Top View)



Figure 2. Logic Symbol



ON Semiconductor®

http://onsemi.com



SC-88/SOT-363/SC70-6 **DF SUFFIX CASE 419B**



MARKING



TSOP-6/SOT-23-6/SC59-6 **DT SUFFIX CASE 318G**



MA = Device Marking = Date Code

PIN ASSIGNMENT

Pin	Function		
1	IN A1		
2	GND		
3	IN A2		
4	OUT Y2		
5	V _{CC}		
6	OUT Y1		

FUNCTION TABLE

A Input	₹ Output
L	Н
Н	L

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.



MAXIMUM RATINGS

Symbol	Characteristics		Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to +7.0	V
VI	DC Input Voltage		$-0.5 \le V_1 \le +7.0$	V
Vo	DC Output Voltage Output in Z or LOW Sta	te (Note 1)	$-0.5 \le V_{O} \le 7.0$	V
I _{IK}	DC Input Diode Current	V _I < GND	-50	mA
I _{OK}	DC Output Diode Current	V _O < GND	-50	mA
Io	DC Output Sink Current		±50	mA
I _{CC}	DC Supply Current per Supply Pin		±100	mA
I _{GND}	DC Ground Current per Ground Pin		±100	mA
T _{STG}	Storage Temperature Range		-65 to +150	°C
P _D	Power Dissipation in Still Air SC-88	, TSOP-6	200	mW
θ_{JA}	Thermal Resistance SC-8	8, TSOP- 6	333	°C/W
TL	Lead Temperature, 1 mm from case for 10 s		260	°C
T _J	Junction Temperature under Bias		+150	°C
V _{ESD}	ESD Withstand Voltage Human Body Mod Machine Mod Charged Device Mod	el (Note 3)	> 2000 > 200 N/A	V

Maximum Ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute maximum-rated conditions is not implied. Functional operation should be restricted to the Recommended Operating Conditions.

- I_O absolute maximum rating must be observed.
 Tested to EIA/JESD22-A114-A
 Tested to EIA/JESD22-A115-A
 Tested to JESD22-C101-A

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit	
V _{CC}	Supply Voltage	Operating Data Retention Only	2.3 1.5	5.5 5.5	V
VI	Input Voltage		0	5.5	V
Vo	Output Voltage	(High or LOW State)	0	5.5	V
T _A	Operating Free-Air Temperature		- 55	+ 125	°C
Δt/ΔV	Input Transition Rise or Fall Rate	$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$ $V_{CC} = 3.0 \text{ V} \pm 0.3 \text{ V}$ $V_{CC} = 5.0 \text{ V} \pm 0.5 \text{ V}$	0 0 0	No Limit No Limit No Limit	ns/V

DC ELECTRICAL CHARACTERISTICS

			V _{CC}	T _A	= 25°C		-40°C ≤ T	∆ ≤ 85°C	$-55^{\circ}C \le T_A$	≤ 125°C	
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Min	Max	Unit
V _T +	Positive Input Threshold Voltage		2.3 2.7 3.0 4.5 5.5	1.0 1.2 1.3 1.9 2.2	1.5 1.7 1.9 2.7 3.3	1.8 2.0 2.2 3.1 3.6	1.0 1.2 1.3 1.9 2.2	1.8 2.0 2.2 3.1 3.6	1.0 1.2 1.3 1.9 2.2	1.8 2.0 2.2 3.1 3.6	V
V _T -	Negative Input Threshold Voltage		2.3 2.7 3.0 4.5 5.5	0.4 0.5 0.6 1.0 1.2	0.75 0.87 1.0 1.5 1.9	1.15 1.4 1.5 2.0 2.3	0.4 0.5 0.6 1.0 1.2	1.15 1.4 1.5 2.0 2.3	0.4 0.5 0.6 1.0 1.2	1.15 1.4 1.5 2.0 2.3	V
V _H	Input Hysteresis Voltage		2.3 2.7 3.0 4.5 5.5	0.25 0.3 0.4 0.6 0.7	0.75 0.83 0.93 1.2 1.4	1.1 1.15 1.2 1.5 1.7	0.25 0.3 0.4 0.6 0.7	1.1 1.15 1.2 1.5 1.7	0.25 0.3 0.4 0.6 0.7	1.1 1.15 1.2 1.5 1.7	V
V _{OH}	High- Level Output Voltage V _{IN} = V _{IH} or V _{IL}	$\begin{split} I_{OH} &= \text{-}100 \ \mu\text{A} \\ I_{OH} &= -3 \ \text{mA} \\ I_{OH} &= -8 \ \text{mA} \\ I_{OH} &= -12 \ \text{mA} \\ I_{OH} &= -16 \ \text{mA} \\ I_{OH} &= -24 \ \text{mA} \\ I_{OH} &= -32 \ \text{mA} \end{split}$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5	V _{CC} - 0.1 1.29 1.9 2.2 2.4 2.3 3.8	V _{CC} 1.52 2.1 2.4 2.7 2.5 4.0		V _{CC} - 0.1 1.29 1.9 2.2 2.4 2.3 3.8		V _{CC} - 0.1 1.29 1.8 2.1 2.3 2.2 3.7		V
V _{OL}	Low- Level Output Voltage V _{IN} = V _{IH} or V _{IL}	$\begin{split} I_{OL} &= 100 \; \mu\text{A} \\ I_{OL} &= 4 \; \text{mA} \\ I_{OL} &= 8 \; \text{mA} \\ I_{OL} &= 12 \; \text{mA} \\ I_{OL} &= 16 \; \text{mA} \\ I_{OL} &= 24 \; \text{mA} \\ I_{OL} &= 32 \; \text{mA} \end{split}$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5		0.08 0.2 0.22 0.28 0.38 0.42	0.1 0.24 0.3 0.4 0.4 0.55 0.55		0.1 0.24 0.3 0.4 0.4 0.55		0.1 0.24 0.4 0.5 0.5 0.55	V
I _{IN}	Input Leakage Current	$V_{IN} = V_{CC}$ or GND	0 to 5.5			±0.1		±1.0		±1.0	μΑ
I _{OFF}	Power Off- Output Leakage Current	V _{OUT} = 5.5 V	0			1		10		10	μΑ
I _{CC}	Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND	5.5			1		10		10	μА

AC ELECTRICAL CHARACTERISTICS (Input $t_f = t_f = 3.0 \text{ ns}$)


				T,	T _A = 25°C		-40° C \leq T _A \leq 85 $^{\circ}$ C		-55° C \leq T _A \leq 125 $^{\circ}$ C		
Symbol	Parameter	Condition	V _{CC} (V)	Min	Тур	Max	Min	Max	Min	Max	Unit
t _{PLH}	Propagation	$R_L = 1 \text{ M}\Omega$, $C_L = 15 \text{ pF}$	2.5 ± 0.2	1.8	4.3	7.4	1.8	8.1	1.8	9.1	ns
t _{PHL}	Input A to Y (Figure 3 and 4)	$R_L = 1 \text{ M}\Omega, C_L = 15 \text{ pF}$ $R_L = 500 \Omega, C_L = 50 \text{ pF}$	3.3 ± 0.3	1.5 1.8	3.3 4.0	5.0 6.0	1.5 1.8	5.5 6.6	1.5 1.8	6.5 7.6	
	,	$R_L = 1 \text{ M}\Omega, C_L = 15 \text{ pF}$ $R_L = 500 \Omega, C_L = 50 \text{ pF}$	5.0 ± 0.5	1.0 1.2	2.7 3.2	4.1 4.9	1.0 1.2	4.5 5.4	1.0 1.2	5.5 6.4	


CAPACITIVE CHARACTERISTICS

Symbol	Parameter	Parameter Condition			
C _{IN}	Input Capacitance	V_{CC} =5.5 V, V_I = 0 V or V_{CC}	2.5	pF	
C _{PD}	Power Dissipation Capacitance (Note 5)	10 MHz, V_{CC} = 3.3 V, V_{I} = 0 V or V_{CC} 10 MHz, V_{CC} = 5.0 V, V_{I} = 0 V or V_{CC}	11 12.5	pF	

^{5.} C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$. C_{PD} is used to determine the no-load dynamic power consumption; $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$.

http://opcomi.com



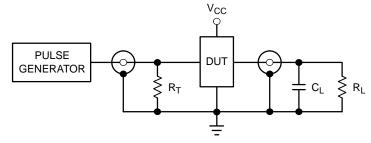

 R_T = C_L or equivalent (includes jog and probe capacitance) R_T = Z_{OUT} of pulse generator (typically 50 Ω)

Figure 3. Switching Waveforms

Figure 4. Test Circuit




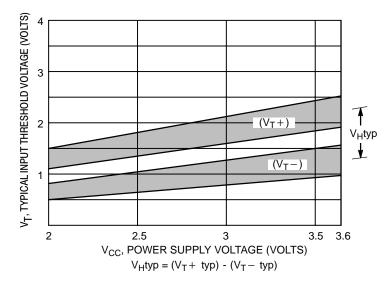


Figure 5. Typical Input Threshold, $V_{T}{}^{+}$, $V_{T}{}^{-}$ versus Power Supply Voltage







(b) A Schmitt-Trigger Offers Maximum Noise Immunity

Figure 6. Typical Schmitt-Trigger Applications

DEVICE ORDERING INFORMATION

		Device Nomenclature							
Device Order Number	Circuit Indicator	No. of Gates per Package	Temp Range Identifier	Technology	Device Function	Package Suffix	Tape & Reel Suffix	Package Type (Name/SOT#/ Common Name)	Tape and Reel Size
NL27WZ14DFT2	NL	2	7	WZ	14	DF	T2	SC-88/SOT-363 /SC70-6	178 mm 3000 Units
NL27WZ14DTT1	NL	2	7	WZ	14	DT	T1	TSOP-6/SOT-23-6 /SC59-6	178 mm 3000 Units

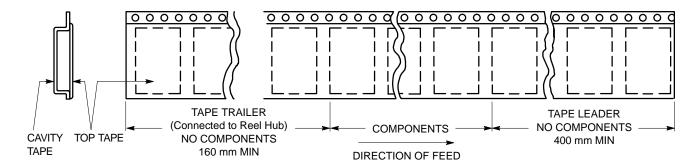


Figure 7. Tape Ends for Finished Goods

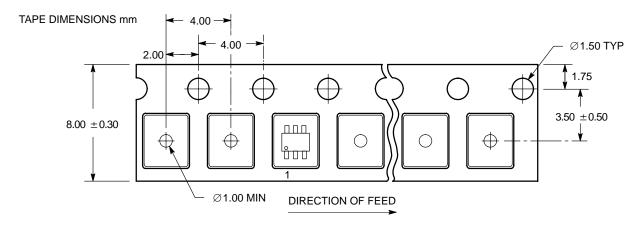


Figure 8. SC70-6/SC-88/SOT-363 DFT2 and SOT23-6/TSOP-6/SC59-6 DTT1 Reel Configuration/Orientation

http://opsami.com

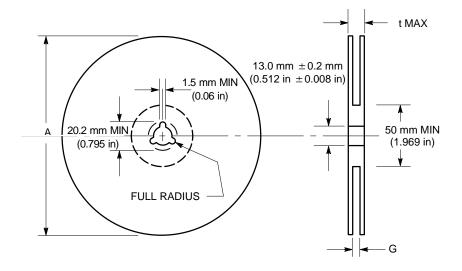


Figure 9. Reel Dimensions

REEL DIMENSIONS

Tape Size	T and R Suffix	A Max	G	t Max
8 mm	T1, T2	178 mm (7 in)	8.4 mm, + 1.5 mm, -0.0 (0.33 in + 0.059 in, -0.00)	14.4 mm (0.56 in)

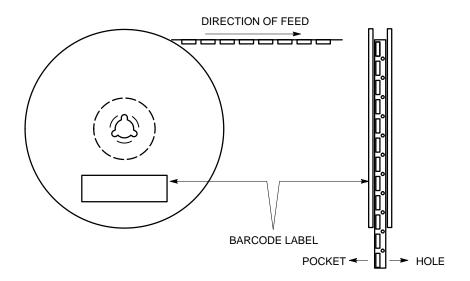



Figure 10. Reel Winding Direction

http://opcomi.com

PACKAGE DIMENSIONS

SC70-6/SC-88/SOT-363 **DF SUFFIX**


CASE 419B-02 ISSUE P



Н

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. 419B-01 OBSOLETE, NEW STANDARD 419B-02.


	INC	HES	MILLIM	IETERS				
DIM	MIN	MAX	MIN	MAX				
Α	0.071	0.087	1.80	2.20				
В	0.045	0.053	1.15	1.35				
C	0.031	0.043	0.80	1.10				
D	0.004	0.012	0.10	0.30				
G	0.026	BSC	0.65 BSC					
Н		0.004		0.10				
J	0.004	0.010	0.10	0.25				
K	0.004	0.012	0.10	0.30				
N	0.008 REF		0.20 REF					
S	0.079	0.087	2.00	2.20				





PACKAGE DIMENSIONS


SOT23-6/TSOP-6/SC59-6 DT SUFFIX

CASE 318G-02 ISSUE I









NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI
 V14 5M 1982
- 2. CONTROLLING DIMENSION: MILLIMETER.
- 2. OOVITHOCHING DIMILITIES IN MICHIDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL
- 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	2.90	3.10	0.1142	0.1220
В	1.30	1.70	0.0512	0.0669
С	0.90	1.10	0.0354	0.0433
D	0.25	0.50	0.0098	0.0197
G	0.85	1.05	0.0335	0.0413
Н	0.013	0.100	0.0005	0.0040
J	0.10	0.26	0.0040	0.0102
K	0.20	0.60	0.0079	0.0236
L	1.25	1.55	0.0493	0.0610
M	0 °	10°	0 °	10°
S	2.50	3.00	0.0985	0.1181

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada **Fax**: 303-675-2176 or 800-344-3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center 2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051 Phone: 81-3-5773-3850

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.