

KR Electronics

General Description


KR 2815 is a 6 dB negative slope equalizer. The equalizer has $< \pm 0.5$ dB deviation from a linear slope from 100 MHz to 900 MHz. Other frequencies and slopes are available. Please consult the factory.

Features


- Negative Slope Equalizer
- $< \pm 0.5$ dB from Linear Slope
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Deviation from Linear Slope
(1 dB/div)

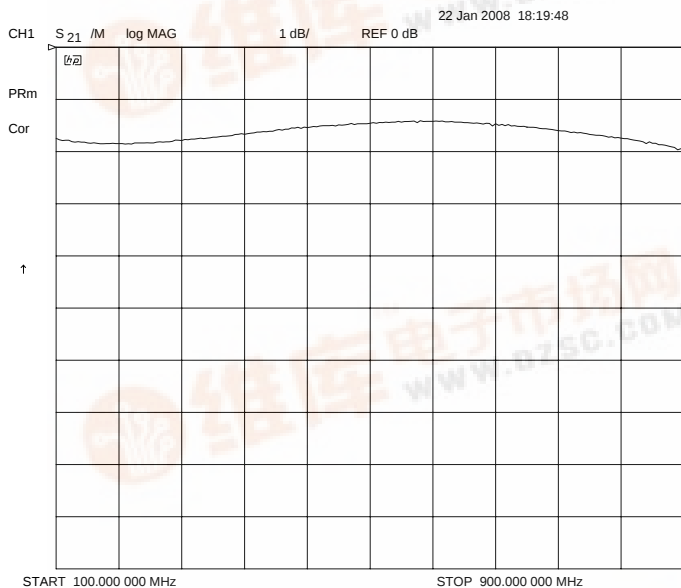

Ideal Response and Measured Response
(1 dB/div)

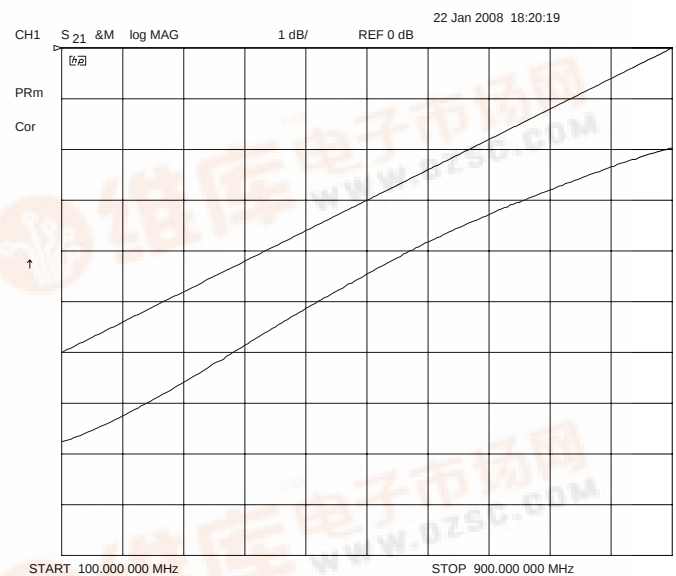

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982




KR 2815 Equalizer

Specifications

Parameter	Specification
Filter type	Equalizer
Frequency Range	100 MHz to 900 MHz
Negative Slope	6 dB
Source and Load	50 Ω

Physical Dimensions

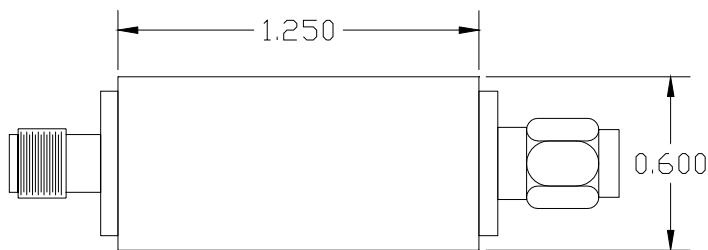

Dimensions in inches
Metal Case
SMA (f) to SMA (m)

