

100731/730/723/720


JOBBER DRILLS

查询"10001.5"供应商

Straight Shank
Standard Helix

BS 328 DIN 338 ISO 235/1

| | Range | Finish |
|-------------------|------------------------------|--------------------|
| 01 000 HSS | 1/16"-3/4" 1.55mm-25.00mm | P1 Blue P1 Blue |
| 01 030 HSS | 1/64"-3/4" 0.30mm-25.00mm | Bright Bright |
| 01 005 HSS | 3/64"-3/4" 1.00mm-20.00mm | TiN TiN |

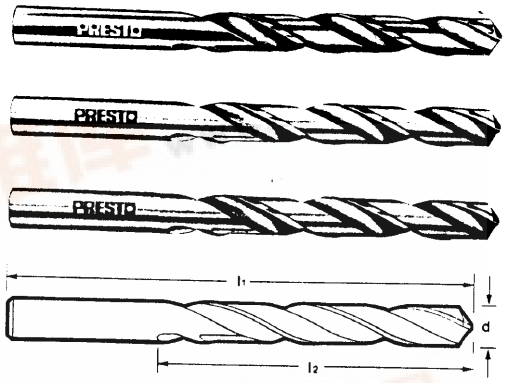

Point Angle 118° General Purpose

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| | | | | | | | | | | | | | | | |
|-------|----|----|---|---|------|----|----|---|---|-------|------|----|-----|---|---|
| *0.30 | 4 | 19 | • | - | 1.80 | 22 | 46 | • | • | | | | | | |
| *0.32 | 4 | 19 | • | - | 1.85 | 22 | 46 | • | • | 5/32 | 3.95 | 43 | 75 | • | • |
| *0.35 | 4 | 19 | • | - | 1.90 | 22 | 46 | • | • | | 4.00 | 43 | 75 | • | • |
| *0.38 | 4 | 19 | • | - | 1.95 | 24 | 49 | • | • | | 4.05 | 43 | 75 | • | • |
| *1/64 | 5 | 20 | • | - | 5/64 | 24 | 49 | • | • | | 4.10 | 43 | 75 | • | • |
| *0.40 | 5 | 20 | • | - | | 24 | 49 | • | • | | 4.15 | 43 | 75 | • | • |
| *0.42 | 5 | 20 | • | - | | 24 | 49 | • | • | | 4.20 | 43 | 75 | • | • |
| *0.45 | 5 | 20 | • | - | | 24 | 49 | • | • | | 4.25 | 43 | 75 | • | • |
| *0.48 | 5 | 20 | • | - | | 27 | 53 | • | • | | 4.30 | 47 | 80 | • | • |
| *0.50 | 6 | 22 | • | - | | 27 | 53 | • | • | | 4.35 | 47 | 80 | • | • |
| *0.52 | 6 | 22 | • | - | | 27 | 53 | • | • | 11/64 | 4.40 | 47 | 80 | • | • |
| *0.55 | 7 | 24 | • | - | | 27 | 53 | • | • | | 4.45 | 47 | 80 | • | • |
| *0.58 | 7 | 24 | • | - | | 27 | 53 | • | • | | 4.50 | 47 | 80 | • | • |
| *0.60 | 7 | 24 | • | - | 3/32 | 30 | 57 | • | • | | 4.55 | 47 | 80 | • | • |
| *0.62 | 8 | 26 | • | - | | 30 | 57 | • | • | | 4.60 | 47 | 80 | • | • |
| *0.65 | 8 | 26 | • | - | | 30 | 57 | • | • | | 4.65 | 47 | 80 | • | • |
| *0.68 | 9 | 28 | • | - | | 30 | 57 | • | • | | 4.70 | 47 | 80 | • | • |
| *0.70 | 9 | 28 | • | - | | 30 | 57 | • | • | | 4.75 | 47 | 80 | • | • |
| *0.72 | 9 | 28 | • | - | | 30 | 57 | • | • | | 4.80 | 52 | 86 | • | • |
| *0.75 | 9 | 28 | • | - | | 30 | 57 | • | • | 3/16 | 4.85 | 52 | 86 | • | • |
| *0.78 | 10 | 30 | • | - | | 33 | 61 | • | • | | 4.90 | 52 | 86 | • | • |
| *1/32 | 10 | 30 | • | - | 7/64 | 33 | 61 | • | • | | 4.95 | 52 | 86 | • | • |
| *0.80 | 10 | 30 | • | - | | 33 | 61 | • | • | | 5.00 | 52 | 86 | • | • |
| *0.82 | 10 | 30 | • | - | | 33 | 61 | • | • | | 5.10 | 52 | 86 | • | • |
| *0.85 | 10 | 30 | • | - | | 33 | 61 | • | • | | 5.15 | 52 | 86 | • | • |
| *0.88 | 11 | 32 | • | - | | 33 | 61 | • | • | | 5.20 | 52 | 86 | • | • |
| *0.90 | 11 | 32 | • | - | | 33 | 61 | • | • | | 5.25 | 52 | 86 | • | • |
| *0.92 | 11 | 32 | • | - | | 33 | 61 | • | • | 13/64 | 5.30 | 52 | 86 | • | • |
| *0.95 | 11 | 32 | • | - | | 36 | 65 | • | • | | 5.35 | 57 | 93 | • | • |
| *0.98 | 12 | 34 | • | - | | 36 | 65 | • | • | | 5.40 | 57 | 93 | • | • |
| *1.00 | 12 | 34 | • | - | | 36 | 65 | • | • | | 5.45 | 57 | 93 | • | • |
| *1.05 | 12 | 34 | • | - | 1/8 | 36 | 65 | • | • | | 5.50 | 57 | 93 | • | • |
| *1.10 | 14 | 36 | • | - | | 36 | 65 | • | • | | 5.55 | 57 | 93 | • | • |
| *1.15 | 14 | 36 | • | - | | 36 | 65 | • | • | | 5.60 | 57 | 93 | • | • |
| *3/64 | 16 | 38 | • | - | | 36 | 65 | • | • | 7/32 | 5.65 | 57 | 93 | • | • |
| *1.20 | 16 | 38 | • | - | | 36 | 65 | • | • | | 5.70 | 57 | 93 | • | • |
| *1.25 | 16 | 38 | • | - | | 39 | 70 | • | • | | 5.75 | 57 | 93 | • | • |
| *1.30 | 16 | 38 | • | - | | 39 | 70 | • | • | | 5.80 | 57 | 93 | • | • |
| *1.35 | 18 | 40 | • | - | | 39 | 70 | • | • | | 5.85 | 57 | 93 | • | • |
| *1.40 | 18 | 40 | • | - | | 39 | 70 | • | • | | 5.90 | 57 | 93 | • | • |
| *1.45 | 18 | 40 | • | - | 9/64 | 39 | 70 | • | • | | 5.95 | 57 | 93 | • | • |
| *1.50 | 18 | 40 | • | - | | 39 | 70 | • | • | | 6.00 | 57 | 93 | • | • |
| 1/16 | 20 | 43 | • | - | | 39 | 70 | • | • | 15/64 | 6.05 | 63 | 101 | • | • |
| | 20 | 43 | • | - | | 39 | 70 | • | • | | 6.10 | 63 | 101 | • | • |
| | 20 | 43 | • | - | | 39 | 70 | • | • | | 6.15 | 63 | 101 | • | • |
| | 20 | 43 | • | - | | 43 | 75 | • | • | | | | | | |
| | 20 | 43 | • | - | | 43 | 75 | • | • | | | | | | |
| | 20 | 43 | • | - | | 43 | 75 | • | • | | | | | | |
| | 22 | 46 | • | - | | 43 | 75 | • | • | | | | | | |



J O B B E R D R I L L S


[查询"10001.5"供应商](#)

Straight Shank

Standard Helix

BS 328 DIN 338 ISO 235/1

| | Range | Finish |
|------------|------------------------------|--------------------|
| 01 000 HSS | 1/16"-3/4" 1.55mm-25.00mm | P1 Blue P1 Blue |
| 01 030 HSS | 1/64"-3/4" 0.30mm-25.00mm | Bright Bright |
| 01 005 HSS | 3/64"-3/4" 1.00mm-20.00mm | TiN TiN |

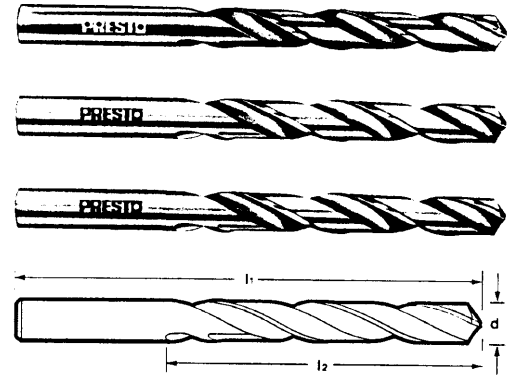

Point Angle 118° General Purpose

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| | | | | | |
|-------|------|----|-----|---|---|
| 1/4 | 6.20 | 63 | 101 | • | • |
| | 6.25 | 63 | 101 | • | • |
| | 6.30 | 63 | 101 | • | • |
| | 6.35 | 63 | 101 | • | • |
| | 6.40 | 63 | 101 | • | • |
| | 6.45 | 63 | 101 | • | • |
| | 6.50 | 63 | 101 | • | • |
| | 6.55 | 63 | 101 | • | • |
| | 6.60 | 63 | 101 | • | • |
| | 6.65 | 63 | 101 | • | • |
| | 6.70 | 63 | 101 | • | • |
| 17/64 | 6.75 | 69 | 109 | • | • |
| | 6.80 | 69 | 109 | • | • |
| | 6.90 | 69 | 109 | • | • |
| | 6.95 | 69 | 109 | • | • |
| | 7.00 | 69 | 109 | • | • |
| | 7.05 | 69 | 109 | • | • |
| | 7.10 | 69 | 109 | • | • |
| 9/32 | 7.15 | 69 | 109 | • | • |
| | 7.20 | 69 | 109 | • | • |
| | 7.25 | 69 | 109 | • | • |
| | 7.30 | 69 | 109 | • | • |
| | 7.35 | 69 | 109 | • | • |
| | 7.40 | 69 | 109 | • | • |
| | 7.50 | 69 | 109 | • | • |
| 19/64 | 7.55 | 75 | 117 | • | • |
| | 7.60 | 75 | 117 | • | • |
| | 7.65 | 75 | 117 | • | • |
| | 7.70 | 75 | 117 | • | • |
| | 7.75 | 75 | 117 | • | • |
| | 7.80 | 75 | 117 | • | • |
| | 7.85 | 75 | 117 | • | • |
| | 7.90 | 75 | 117 | • | • |
| 5/16 | 7.95 | 75 | 117 | • | • |
| | 8.00 | 75 | 117 | • | • |
| | 8.05 | 75 | 117 | • | • |
| | 8.10 | 75 | 117 | • | • |
| | 8.15 | 75 | 117 | • | • |
| | 8.20 | 75 | 117 | • | • |
| | 8.25 | 75 | 117 | • | • |
| | 8.30 | 75 | 117 | • | • |
| 21/64 | 8.35 | 75 | 117 | • | • |

| | | | | | |
|-------|-------|----|-----|---|---|
| 11/32 | 8.40 | 75 | 117 | • | • |
| | 8.50 | 75 | 117 | • | • |
| | 8.55 | 75 | 117 | • | • |
| | 8.60 | 81 | 125 | • | • |
| | 8.65 | 81 | 125 | • | • |
| | 8.70 | 81 | 125 | • | • |
| | 8.75 | 81 | 125 | • | • |
| | 8.80 | 81 | 125 | • | • |
| | 8.85 | 81 | 125 | • | • |
| | 8.90 | 81 | 125 | • | • |
| | 9.00 | 81 | 125 | • | • |
| | 9.05 | 81 | 125 | • | • |
| | 9.10 | 81 | 125 | • | • |
| 23/64 | 9.15 | 81 | 125 | • | • |
| | 9.20 | 81 | 125 | • | • |
| | 9.25 | 81 | 125 | • | • |
| | 9.30 | 81 | 125 | • | • |
| | 9.35 | 81 | 125 | • | • |
| | 9.40 | 81 | 125 | • | • |
| | 9.45 | 81 | 125 | • | • |
| | 9.50 | 81 | 125 | • | • |
| 3/8 | 9.55 | 87 | 133 | • | • |
| | 9.60 | 87 | 133 | • | • |
| | 9.65 | 87 | 133 | • | • |
| | 9.70 | 87 | 133 | • | • |
| | 9.75 | 87 | 133 | • | • |
| | 9.80 | 87 | 133 | • | • |
| | 9.85 | 87 | 133 | • | • |
| | 9.90 | 87 | 133 | • | • |
| 25/64 | 9.95 | 87 | 133 | • | • |
| | 10.00 | 87 | 133 | • | • |
| | 10.05 | 87 | 133 | • | • |
| | 10.10 | 87 | 133 | • | • |
| | 10.15 | 87 | 133 | • | • |
| | 10.20 | 87 | 133 | • | • |
| | 10.25 | 87 | 133 | • | • |
| | 10.30 | 87 | 133 | • | • |
| 13/32 | 10.35 | 87 | 133 | • | • |
| | 10.40 | 87 | 133 | • | • |
| | 10.45 | 87 | 133 | • | • |
| | 10.50 | 87 | 133 | • | • |
| | 10.55 | 87 | 133 | • | • |
| | 10.60 | 87 | 133 | • | • |

| | | | | | |
|-------|-------|-----|-----|---|---|
| 27/64 | 10.65 | 87 | 133 | • | • |
| | 10.70 | 94 | 142 | • | • |
| | 10.75 | 94 | 142 | • | • |
| | 10.80 | 94 | 142 | • | • |
| | 10.85 | 94 | 142 | • | • |
| | 10.90 | 94 | 142 | • | • |
| | 10.95 | 94 | 142 | • | • |
| | 11.00 | 94 | 142 | • | • |
| | 11.05 | 94 | 142 | • | • |
| | 11.10 | 94 | 142 | • | • |
| 7/16 | 11.15 | 94 | 142 | • | • |
| | 11.20 | 94 | 142 | • | • |
| | 11.25 | 94 | 142 | • | • |
| | 11.30 | 94 | 142 | • | • |
| | 11.35 | 94 | 142 | • | • |
| | 11.40 | 94 | 142 | • | • |
| | 11.45 | 94 | 142 | • | • |
| | 11.50 | 94 | 142 | • | • |
| 29/64 | 11.55 | 94 | 142 | • | • |
| | 11.60 | 94 | 142 | • | • |
| | 11.65 | 94 | 142 | • | • |
| | 11.70 | 94 | 142 | • | • |
| | 11.75 | 94 | 142 | • | • |
| | 11.80 | 94 | 142 | • | • |
| | 11.85 | 101 | 151 | • | • |
| | 11.90 | 101 | 151 | • | • |
| 15/32 | 11.95 | 101 | 151 | • | • |
| | 12.00 | 101 | 151 | • | • |
| | 12.10 | 101 | 151 | • | • |
| | 12.20 | 101 | 151 | • | • |
| | 12.25 | 101 | 151 | • | • |
| | 12.30 | 101 | 151 | • | • |
| 31/64 | 12.40 | 101 | 151 | • | • |
| | 12.50 | 101 | 151 | • | • |
| | 12.60 | 101 | 151 | • | • |
| 1/2 | 12.70 | 101 | 151 | • | • |
| | 12.75 | 101 | 151 | • | • |
| | 12.80 | 101 | 151 | • | • |
| | 12.90 | 101 | 151 | • | • |
| | 13.00 | 101 | 151 | • | • |
| 33/64 | 13.10 | 101 | 151 | • | • |


J O B B E R D R I L L S

[查询"10001.5"供应商](#)

Straight Shank
Standard Helix

BS 328 DIN 338 ISO 235/1

| | Range | Finish |
|-------------------|------------------------------|--------------------|
| 01 000 HSS | 1/16"-3/4" 1.55mm-25.00mm | P1 Blue P1 Blue |
| 01 030 HSS | 1/64"-3/4" 0.30mm-25.00mm | Bright Bright |
| 01 005 HSS | 3/64"-3/4" 1.00mm-20.00mm | TiN TiN |

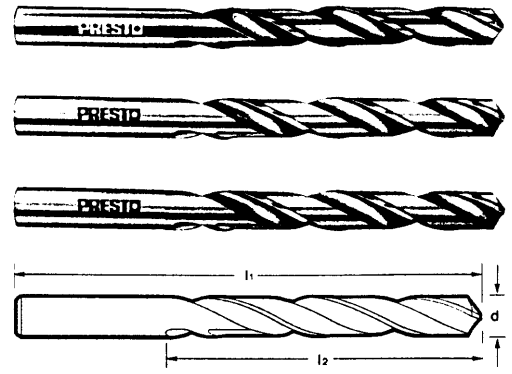

Point Angle 118° General Purpose

| Dia | Flute Length | Overall Length | 01000 | 01005 |
|-----|----------------|----------------|-------|--------------|
| in | mm | mm | 01030 | Availability |
| d | l ₂ | l ₁ | | |

| | | | | |
|-------|-----|-----|---|---|
| 13.20 | 101 | 151 | • | • |
| 13.25 | 108 | 160 | • | • |
| 13.30 | 108 | 160 | • | • |
| 13.40 | 108 | 160 | • | • |
| 17/32 | 108 | 160 | • | • |
| 13.50 | 108 | 160 | • | • |
| 13.60 | 108 | 160 | • | • |
| 13.70 | 108 | 160 | • | • |
| 13.75 | 108 | 160 | • | • |
| 13.80 | 108 | 160 | • | • |
| 35/64 | 108 | 160 | • | • |
| 13.90 | 108 | 160 | • | • |
| 14.00 | 108 | 160 | • | • |
| 14.25 | 114 | 169 | • | • |
| 9/16 | 114 | 169 | • | • |
| 14.50 | 114 | 169 | • | • |
| 37/64 | 114 | 169 | • | • |
| 14.75 | 114 | 169 | • | • |
| 15.00 | 114 | 169 | • | • |
| 19/32 | 120 | 178 | • | • |
| 15.25 | 120 | 178 | • | • |
| 39/64 | 120 | 178 | • | • |
| 15.50 | 120 | 178 | • | • |
| 15.75 | 120 | 178 | • | • |
| 5/8 | 120 | 178 | • | • |
| 16.00 | 120 | 178 | • | • |
| 41/64 | 125 | 184 | • | • |
| 16.50 | 125 | 184 | • | • |
| 21/32 | 125 | 184 | • | • |
| 17.00 | 125 | 184 | • | • |
| 43/64 | 130 | 191 | • | • |
| 11/16 | 130 | 191 | • | • |
| 17.50 | 130 | 191 | • | • |
| 18.00 | 130 | 191 | • | • |
| 23/32 | 135 | 198 | • | • |
| 18.50 | 135 | 198 | • | • |
| 19.00 | 135 | 198 | • | • |
| 3/4 | 140 | 205 | • | • |
| 19.50 | 140 | 205 | • | • |
| 25/32 | 140 | 205 | • | • |
| 20.00 | 140 | 205 | • | • |
| 21.00 | 145 | 213 | • | - |
| 22.00 | 150 | 221 | • | - |
| 23.00 | 155 | 229 | • | - |
| 24.00 | 160 | 236 | • | - |
| 25.00 | 160 | 236 | • | - |