

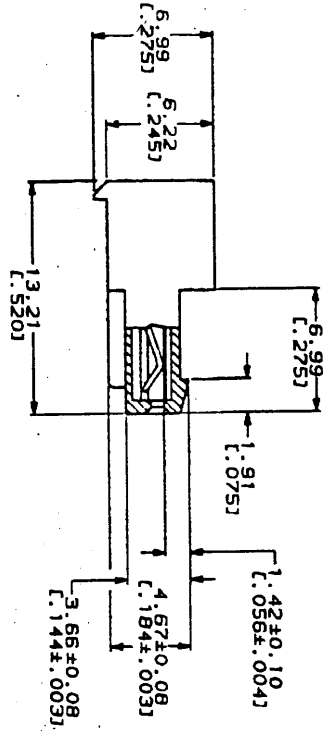


查询"640442-2"供应商



- 1. MATERIAL. CONNECTOR - NYLON U94V-2 (BLUE) CONTACTS - 0.301(.012) THICK COPPER ALLOY (BRIGHT-TIN 0.00203 (.000080) MIN THK)
- 2. CONTACTS ACCEPT 26 AWG WIRE WITH 1.52(.050) MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03(.025 ±.001) SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE CLOSED END WITH LOCKING RAMP.

METRIC

DO NOT SCALE PRINT.		OR		DIN A	
UNLESS SPECIFIED DIMENSIONS IN MM (INCHES) TOLERANCES ON:		8. LEUIS 4-22-91		AMP	
3 DEC DEC 2 0.13 (.005)		8. 21118 4-22-91		AMP Incorporated	
MATERIAL		8. MILLER 4-22-91		Harrisburg, PA 17105-2000	
PRODUCT SPEC		108-1050		NAME	
APPLICATION SPEC		114-1019		MTA 100 CONNECTOR ASSEMBLY,	
SCALE 5:1		SIZE CASE CODE		26 AWG, STANDARD	
SHEET 1 OF 1		00779		DRAWING NO	
CUSTOMER DRAWING		640442		PART NO	

588-325

588 258
260
271
283
295
301
313

(640442)

CM	54	Zone	LINE	DESCRIPTION	DATE	APPRO
				REACT 2--0 THRU 2--3, 2--6,		
				2--7 & 2--8 PER PR CH 92-2	1-7-92	MS

640442