



Lead-free

1N5819HW


1.0A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- Σ Guard Ring Die Construction for Transient Protection
- Σ Low Power Loss, High Efficiency
- Σ High Surge Capability
- Σ High Current Capability and Low Forward Voltage Drop
- Σ For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- Σ **Lead Free/RoHS Compliant (Note 1)**

Mechanical Data

- Σ Case: SOD-123
- Σ Plastic Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Σ Moisture Sensitivity: Level 1 per J-STD-020C
- Σ Polarity: Cathode Band
- Σ Leads: Solderable per MIL-STD-202, Method 208
- Σ Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe)
- Σ Marking: Date Code and Type Code, See Page 3
- Σ Type Code: SL
- Σ Ordering Information: See Page 3
- Σ Weight: 0.01 grams (approximate)



SOD-123		
Dim	Min	Max
A	3.55	3.85
B	2.55	2.85
C	1.40	1.70
D	—	1.35
E	0.45	0.65
	0.55 Typical	
G	0.25	—
H	0.11 Typical	
J	—	0.10
a	0 ∞	8 ∞
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage @ I _R = 1.0mA	V _{RRM} V _{RWM} V _R	40	V
RMS Reverse Voltage	V _{R(RMS)}	28	V
Average Rectified Output Current @ T _L = 90°C	I _O	1.0	A
Repetitive Peak Forward Current t _p ≤ 1ms, d ≤ 0.5	I _{FRM}	1.5	A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	25	A
Power Dissipation (Note 2)	P _d	450	mW
Typical Thermal Resistance Junction to Ambient (Note 2)	R _{qJA}	222	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +125	°C





- Notes:
1. No purposefully added lead.
 2. Device mounted on FR-4 PC Board, 2"x2", 2 oz. Copper, single sided, Cathode pad dimensions 0.75"x1.0", Anode pad dimensions 0.25"x1.0".



Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 3)	$V_{(BR)R}$	40	∞	∞	V	$I_R = 1.0\text{mA}$
Forward Voltage	V_F	∞ ∞ ∞	∞ ∞ ∞	0.320 0.450 0.750	V	$I_F = 0.1\text{A}$ $I_F = 1.0\text{A}$ $I_F = 3.0\text{A}$
Reverse Leakage Current (Note 3)	I_R	∞ ∞ ∞ ∞ ∞ ∞	∞ ∞ 10 1 15 1.5	1.0 10 50 2 75 3	mA mA mA mA mA mA	$V_R = 40\text{V}, T_A = 25^\circ\text{C}$ $V_R = 40\text{V}, T_A = 100^\circ\text{C}$ $V_R = 4\text{V}, T_A = 25^\circ\text{C}$ $V_R = 4\text{V}, T_A = 100^\circ\text{C}$ $V_R = 6\text{V}, T_A = 25^\circ\text{C}$ $V_R = 6\text{V}, T_A = 100^\circ\text{C}$
Total Capacitance	C_T	∞	50	∞	pF	$V_R = 4\text{V}, f = 1.0\text{MHz}$

Notes: 3. Short duration pulse test used to minimize self-heating effect.

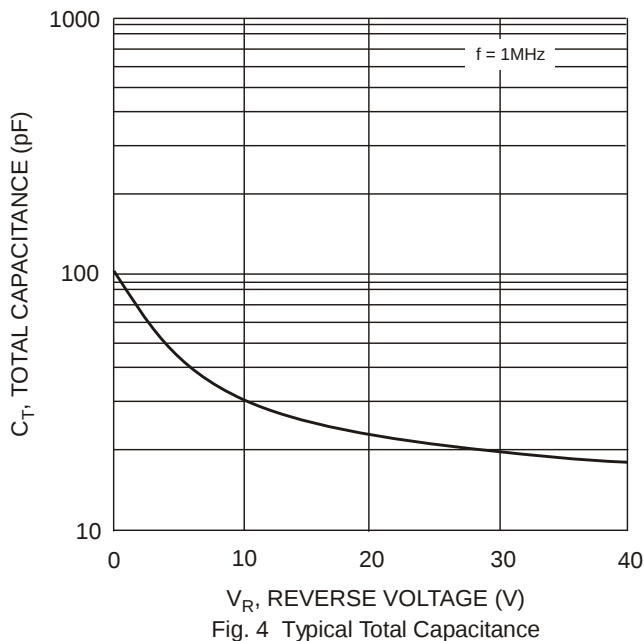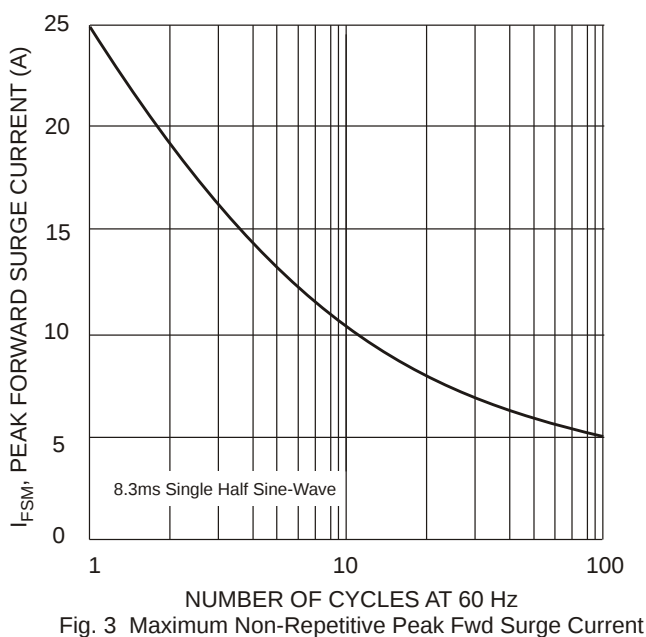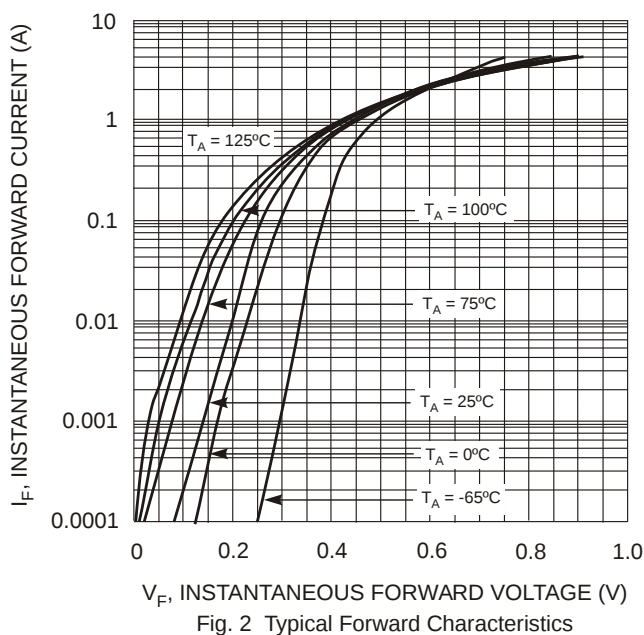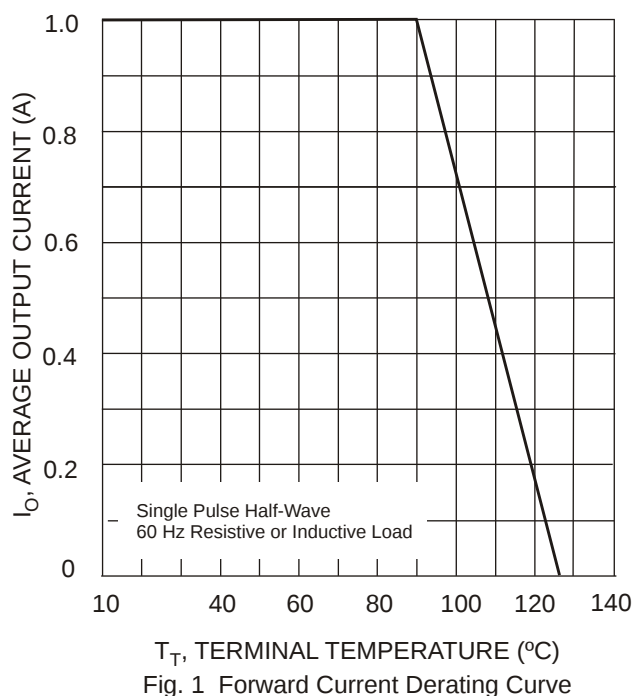

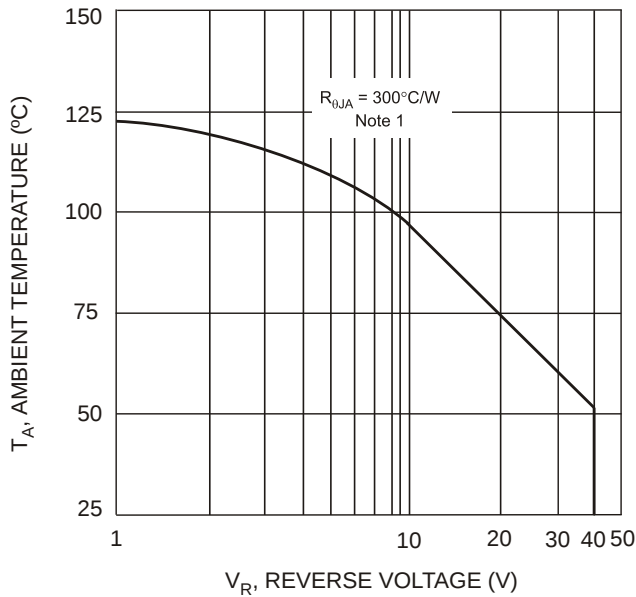


Fig. 5 Typical Safe Operating Area

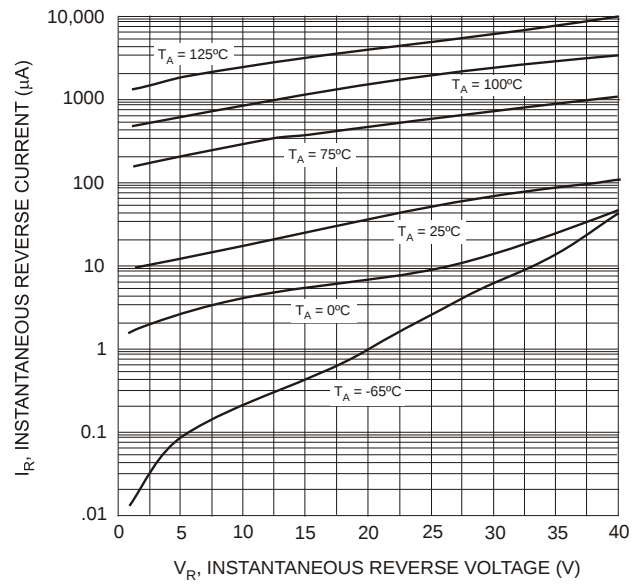


Fig. 6 Typical Reverse Characteristics

Ordering Information (Note 4)

Device	Packaging	Shipping
1N5819HW-7-F	SOD-123	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



SL = Product Type Marking Code
YM = Date Code Marking
Y = Year (ex: N = 2002)
M = Month (ex: 9 = September)

Date Code Key

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009
Code	M	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.