

ALUMINUM ELECTROLYTIC CAPACITORS

深圳UHD0603MPR供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

nichicon

HD

High Ripple Low Impedance

series



Smaller



Low Impedance



Anti-Solvent Feature



Laminated case products

- Laminated case series.
- Lower impedance at high frequency range.
- Smaller case size and high ripple current.

HC

Low Impedance


HD



Specifications

Item	Performance Characteristics								
Category Temperature Range	— 40 ~ + 105°C								
Rated Voltage Range	6.3 ~ 50V								
Rated Capacitance Range	22 ~ 6800μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3(μ A), whichever is greater.								
tan δ	Rated voltage (V)		6.3	10	16	25	35	50	120Hz 20°C
	tanδ (MAX.)		0.22	0.19	0.16	0.14	0.12	0.10	
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.								
Stability at Low Temperature	Rated voltage (V)		6.3	10	16	25	35	50	120Hz
	Impedance ratio ZT/Z20(MAX.)	Z—25°C/Z+20°C	2	2	2	2	2	2	
		Z—40°C/Z+20°C	3	3	3	3	3	3	
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 5000 hours (φD ≤ 6.3 : 2000 hours, φD=8 : 3000 hours, φD=10 : 4000 hours) at 105°C the peak voltage shall not exceed the rated D.C. voltage, capacitors meet the characteristics requirements listed below.								
	Capacitance change		Within ±25% of initial value						
	tanδ		200% or less of initial specified value						
	Leakage current		Initial specified value or less						
Marking	Black print on the case top.								

Radial Lead Type

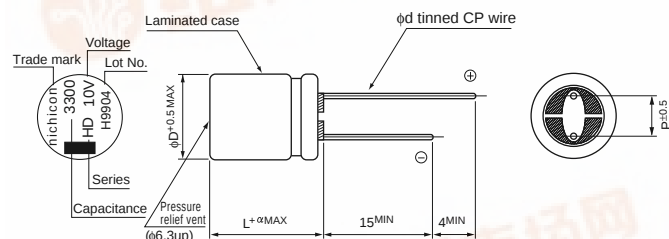


α	(L<20)	1.5
	(L≥20)	2.0

	φD	5	6.3	8	10	12.5	16
P	2.0	2.5	3.5	5.0	5.0	7.5	
φd	0.5	0.5	0.6	0.6	*0.6	0.8	

※ In case L > 25 for the φ12.5 dia. unit, lead dia. φd=0.8mm

Type numbering system (Example : 10V 3300μF)

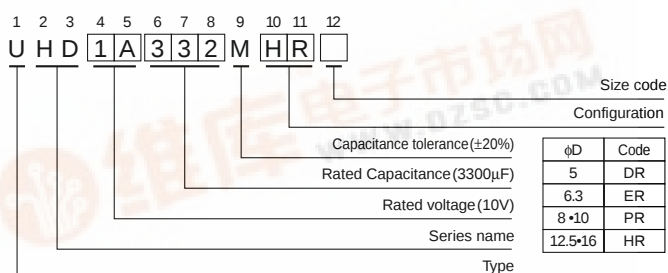

φD	Code
5	DR
6.3	ER
8-10	PR
12.5-16	HR



Please refer to page 18, 19, 20 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

HD series

■ Standard ratings

V(Code) Cap.(μF) Item Code		6.3(0J)				10(1A)			
		Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz	Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz
			20°C/100kHz	— 10°C/100kHz			20°C/100kHz	— 10°C/100kHz	
100	101					5 × 11	0.30	1.0	250
150	151	5 × 11	0.30	1.0	250				
220	221					6.3 × 11	0.13	0.41	405
330	331	6.3 × 11	0.13	0.41	405				
470	471					8 × 11.5	0.072	0.22	760
560	561	8 × 11.5	0.072	0.22	760				
680	681					8 × 15	0.056	0.17	995
						▲ 10 × 12.5	0.053	0.16	1030
820	821	8 × 15	0.056	0.17	995				
1000	102	10 × 12.5	0.053	0.16	1030	8 × 20	0.041	0.13	1250
						▲ 10 × 16	0.038	0.12	1430
1200	122	8 × 20	0.041	0.13	1250	10 × 20	0.023	0.069	1820
		▲ 10 × 16	0.038	0.12	1430				
1500	152	10 × 20	0.023	0.069	1820	10 × 25	0.022	0.066	2150
2200	222	10 × 25	0.022	0.066	2150	12.5 × 20	0.021	0.053	2360
3300	332	12.5 × 20	0.021	0.053	2360	12.5 × 25	0.018	0.045	2770
3900	392	12.5 × 25	0.018	0.045	2770	12.5 × 31.5	0.016	0.041	3290
						▲ 16 × 20	0.018	0.045	3140
4700	472	12.5 × 31.5	0.016	0.041	3290	12.5 × 35.5	0.015	0.039	3400
5600	562	12.5 × 35.5	0.015	0.039	3400				
		▲ 16 × 20	0.018	0.045	3140	16 × 25	0.016	0.043	3460
6800	682	16 × 25	0.016	0.043	3460				

V(Code) Cap.(μF) Item Code		16(1C)				25(1E)			
		Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz	Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz
			20°C/100kHz	— 10°C/100kHz			20°C/100kHz	— 10°C/100kHz	
47	470					5 × 11	0.30	1.0	250
56	560	5 × 11	0.30	1.0	250				
100	101					6.3 × 11	0.13	0.41	405
120	121	6.3 × 11	0.13	0.41	405				
220	221					8 × 11.5	0.072	0.22	760
330	331	8 × 11.5	0.072	0.22	760	8 × 15	0.056	0.17	995
						▲ 10 × 12.5	0.053	0.16	1030
470	471	8 × 15	0.056	0.17	995	8 × 20	0.041	0.13	1250
		▲ 10 × 12.5	0.053	0.16	1030	▲ 10 × 16	0.038	0.12	1430
680	681	8 × 20	0.041	0.13	1250	10 × 20	0.023	0.069	1820
		▲ 10 × 16	0.038	0.12	1430				
820	821					10 × 25	0.022	0.066	2150
1000	102	10 × 20	0.023	0.069	1820	12.5 × 20	0.021	0.053	2360
1200	122	10 × 25	0.022	0.066	2150				
1500	152	12.5 × 20	0.021	0.053	2360	12.5 × 25	0.018	0.045	2770
1800	182					12.5 × 31.5	0.016	0.041	3290
						▲ 16 × 20	0.018	0.045	3140
2200	222	12.5 × 25	0.018	0.045	2770	12.5 × 35.5	0.015	0.039	3400
2700	272	12.5 × 31.5	0.016	0.041	3290	16 × 25	0.016	0.043	3460
		▲ 16 × 20	0.018	0.045	3140				
3300	332	12.5 × 35.5	0.015	0.039	3400				
3900	392	16 × 25	0.016	0.043	3460				

▲ : In this case, [6] will be put at 12th digit of type numbering system.

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

HD series

■ Standard ratings

V(Code) Cap.(μF) Code		35(1V)				50(1H)			
		Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz	Case size φD × L (mm)	Impedance(ΩMAX.)		Rated ripple (mA rms) 105°C/100kHz
			20°C/100kHz	— 10°C/100kHz			20°C/100kHz	— 10°C/100kHz	
22	220					5 ×11	0.34	1.18	238
33	330	5 ×11	0.30	1.0	250				
56	560	6.3 ×11	0.13	0.41	405	6.3 ×11	0.14	0.50	385
100	101					8 ×11.5	0.074	0.22	724
120	121					8 ×15	0.061	0.18	950
150	151	8 ×11.5	0.072	0.22	760	10 ×12.5	0.061	0.18	979
180	181					8 ×20	0.046	0.14	1190
220	221	8 ×15 ▲10 ×12.5	0.056 0.053	0.17 0.16	995 1030	10 ×16	0.042	0.12	1370
270	271	8 ×20	0.041	0.13	1250	10 ×20	0.030	0.090	1580
330	331	10 ×16	0.038	0.12	1430	10 ×25	0.028	0.085	1870
470	471	10 ×20	0.023	0.069	1820	12.5 ×20	0.027	0.068	2050
560	561	10 ×25	0.022	0.066	2150	12.5 ×25	0.023	0.059	2410
680	681	12.5 ×20	0.021	0.053	2360	12.5 ×31.5	0.021	0.052	2860
820	821					12.5 ×35.5 ▲16 ×20	0.019 0.023	0.051 0.059	2960 2730
1000	102	12.5 ×25	0.018	0.045	2770	16 ×25	0.021	0.056	3010
1200	122	12.5 ×31.5 ▲16 ×20	0.016 0.018	0.041 0.045	3290 3140				
1500	152	12.5 ×35.5	0.015	0.039	3400				
1800	182	16 ×25	0.016	0.043	3460				

▲ : In this case, 6 will be put at 12th digit of type numbering system.

■ Frequency coefficient of rated ripple current

Cap.(μF)	Frequency				
	50Hz	120Hz	1kHz	10kHz	100kHz
22 ~ 33	0.45	0.55	0.75	0.90	1.00
39 ~ 330	0.60	0.70	0.85	0.95	1.00
390 ~ 1000	0.65	0.75	0.90	0.98	1.00
1200 ~ 6800	0.75	0.80	0.95	1.00	1.00