

PRELIMINARY DATA

Page 1/5 UK



IGBT BASED DC SOLID-STATE RELAY

- ▶ Latest high voltage IGBT technology generation.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

SCI0501200



Control voltage range	4.5-32VDC
Max transient peak voltage	1200v
Advised max. DC Mains peak voltage	650VDC
Max. Load Current (with heatsink)	50ADC

DC Mains voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
650VDC Max Advised (Depends on protection clamping voltage)	0 to 50A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

Fig. 1

HIGH SIDE WIRING DIAGRAM (Load connected to "-")

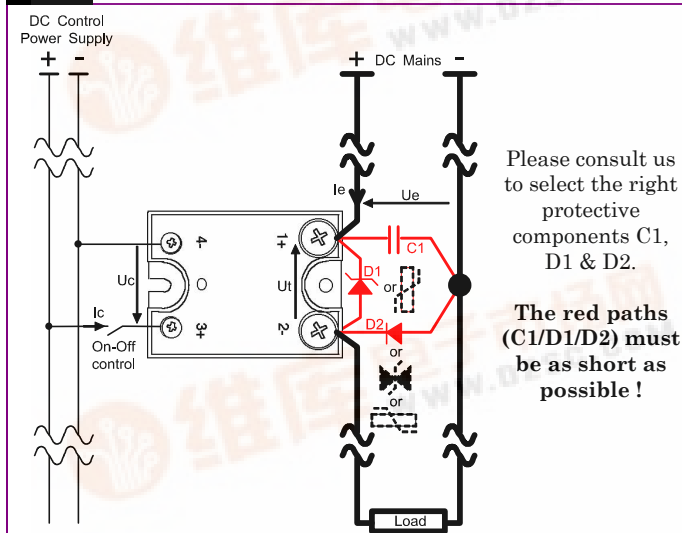


Fig. 2

LOW SIDE WIRING DIAGRAM (Load connected to "+")



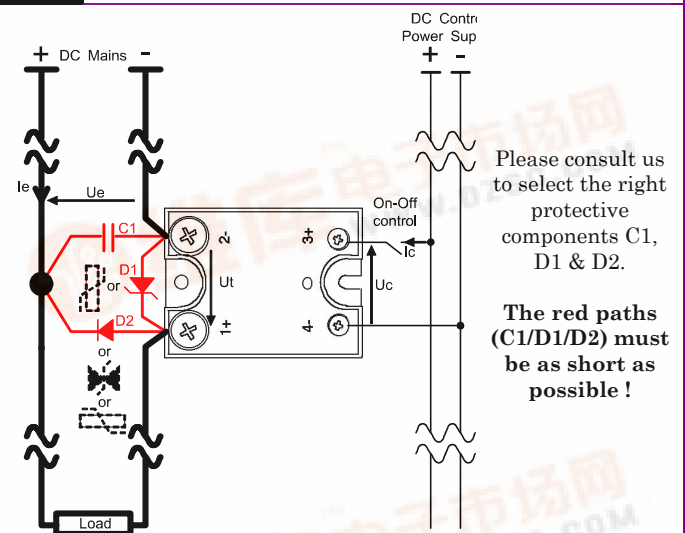


Fig. 3


INTERNAL DIAGRAM

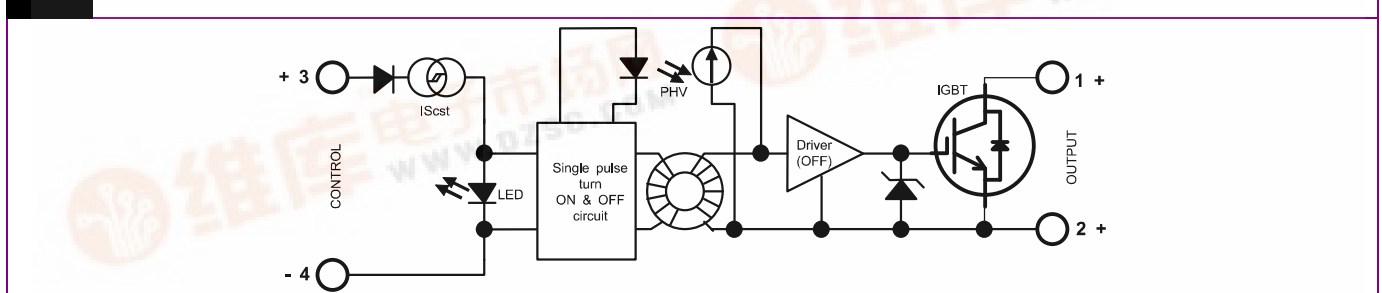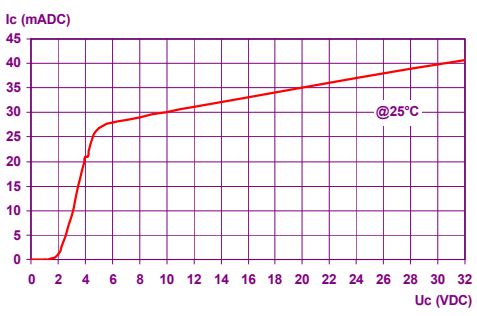

CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.	Fig. 4 CONTROL CURRENT vs. CONTROL VOLTAGE 
	Nom. Control voltage	U_{Cnom}	12-24VDC		
	Nom. Control current	I_{Cnom}	35mADC		
	Control voltage range	U_c	4.5 – 32VDC	typical=4.3V	
	Control current consumption	I_c	25 – 42mADC	See curve	
	Releasing control voltage	$U_{Coffmax}$	1VDC	Typical= 3.5V	
	Max. reverse control voltage	$-U_{Cmax}$	32VDC	$-I_{Cmax} < 100\mu A$	
	Input impedance	R_{in}	Current limitation	See curve	

TIME CHARACTERISTICS

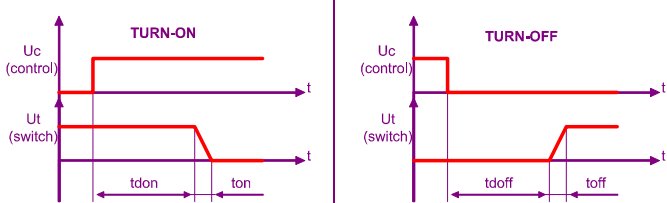TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	
	Turn on time	t_{on}	10 μ s	
	Turn on delay	t_{don}	600 μ s	
	Turn off time	t_{off}	50 μ s	
	Turn off delay	t_{doff}	100 μ s	
	Max. On-Off frequency	$F_{(on-off)}$	200Hz	

POWER OUTPUT CHARACTERISTICS

POWER CIRCUIT	CHARACTERISTIC		LABEL	VALUE			INFO.
	Mains voltage range		U_t U_e	Min = V_{CEsat} Max (Advised) = 650VDC			Depends on protection clamping voltage (D1)
	Non-repetitive peak voltage		U_{tp}	1200V			
	Overvoltage protection		D1	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)			Please consult us to select the right protective components
	Off-state max reverse voltage drop (internal diode)		$-U_t$	1.4V			@ $I_e=50A$
	Maximum nominal currents		$I_e \text{ max}$	Resistive		Motor	See fig. 9
				50A		Please contact us	
	Max. non-repetitive peak current		I_{epeak}	Switch OFF D<1%	Switch OFF F_{max}	ON-state	@ $T_c=100^\circ C$ @ $T_j=175^\circ C$ @ U_{tp} (See fig. 8)
				50A	50A	320A	
	Min. load current		I_{emin}	0mA			
	Max. leakage current		$I_{elk \text{ max}}$	1mA			@ U_{tp} @ T_{jmax}
	Max. on-state voltage		V_{CEsat}	1.4V @ $T_j=25^\circ C$		1.8V @ $T_j=125^\circ C$	@ I_{emax}
	Typ. output capacitance		C_{out}	300pF			@ U_{tp}
	Junction/case thermal resistance		R_{thjc}	0.4K/W			
	Built-in heatsink thermal resistance vertically mounted		R_{thra}	10K/W			@ $\Delta T_{ra}=75^\circ C$
	Heatsink thermal time constant		T_{thra}	10 minutes			@ $\Delta T_{ra}=60^\circ C$
	Control inputs/power outputs insulation voltage		U_{imp}	4kV			
	Inputs/case insulation voltage		U_{imp}	4kV			
	Outputs/case insulation voltage		U_{imp}	4kV			
	Isolation resistance		R_{io}	1G Ω			
	Isolation capacitance		C_{io}	<8pF			
	Maximum junction temperature		T_{jmax}	175 $^\circ C$			
	Storage ambient temperature		T_{stg}	-40->+100 $^\circ C$			
	Operating ambient temperature		T_{amb}	-40->+90 $^\circ C$			See fig. 9
	Max. case temperature		T_c	100 $^\circ C$			

OUTPUT SWITCH CHARACTERISTIC CURVES

Fig. 5 VOLTAGE DROP VS LOAD CURRENT

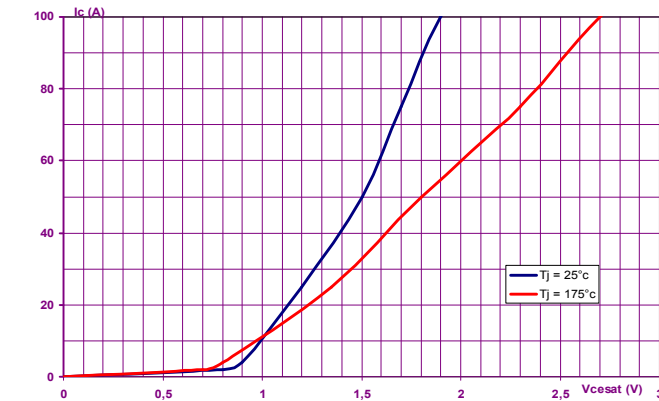


Fig. 6 REVERSE VOLTAGE DROP VS REVERSE CURRENT

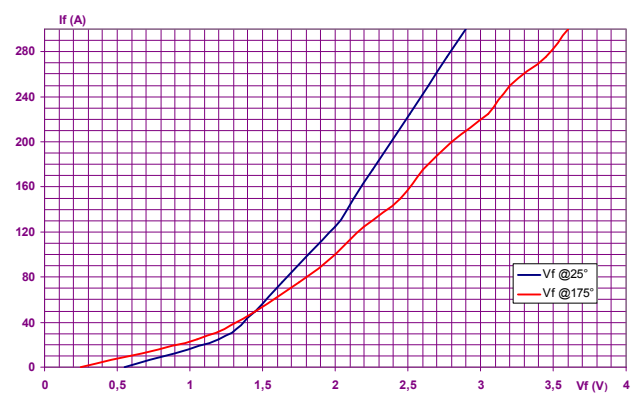


Fig. 7 POWER ELEMENT TRANSIENT THERMAL IMPEDANCE vs. PULSE DURATION

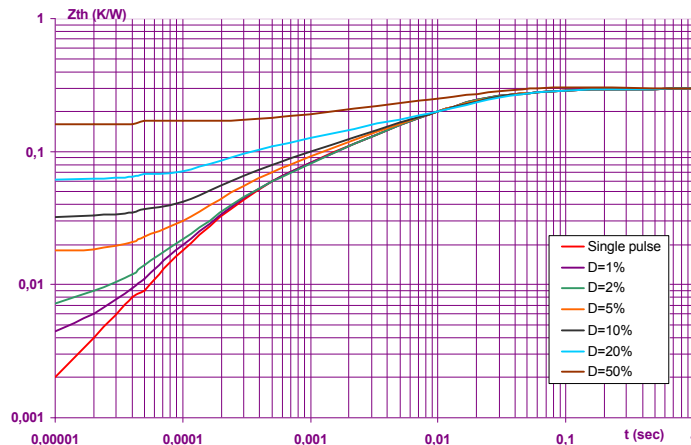


Fig. 8 ON-STATE PEAK OVERLOAD CURRENT vs. PULSE DURATION


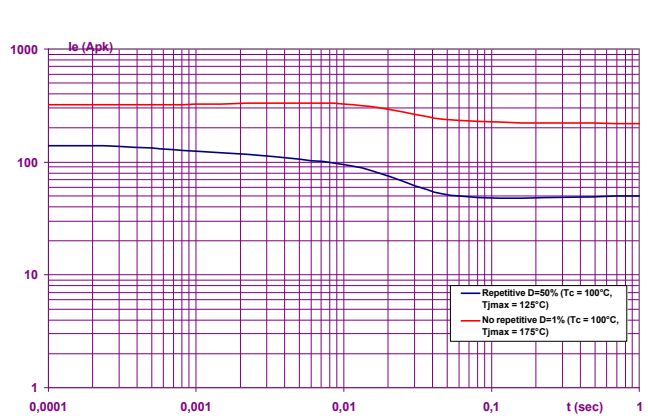


Fig. 9 POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

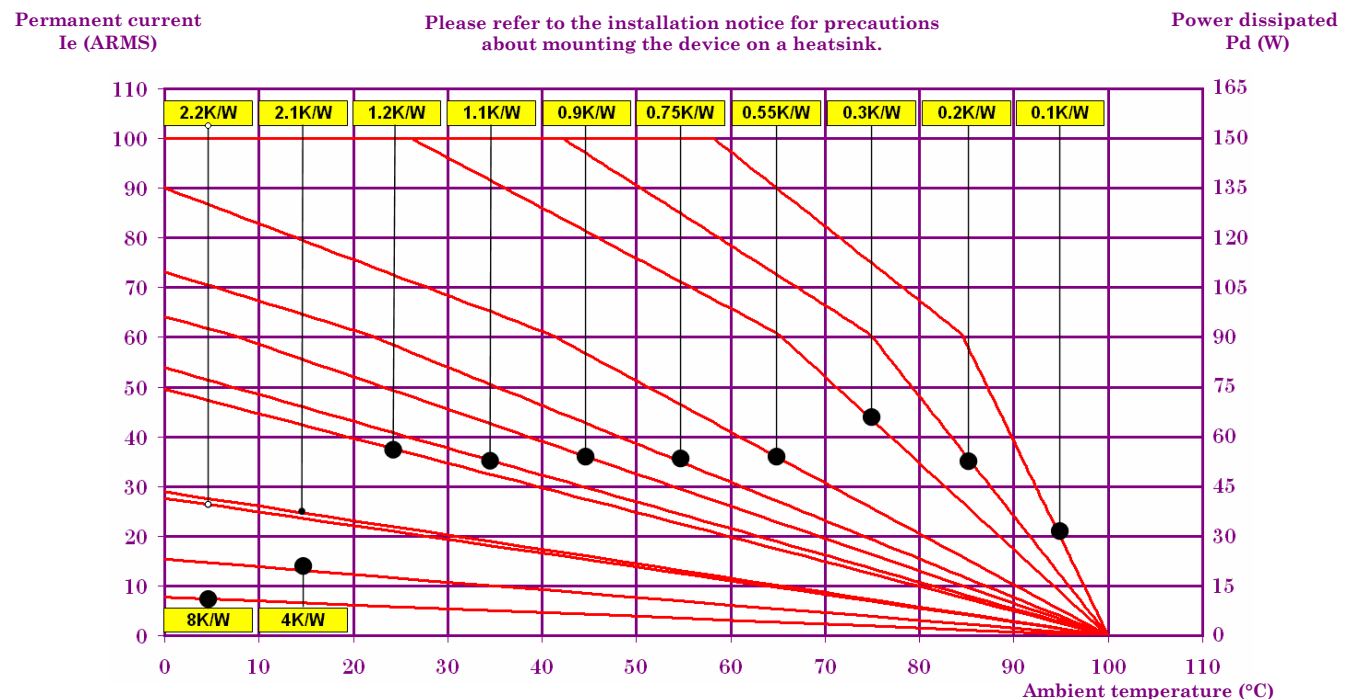

10K/W = No Heatsink / 1LD12020 4K/W = 150x150x3mm aluminium sheet 2.2K/W = WF262100 / WF151200
 2.1K/W = WF210000 1.2K/W = WF121000 1.1K/W = WF131100 0.9K/W = WF115100 0.75K/W = WF070000
 0.55K/W = WF050000 0.3K/W = WF031100 0.2K/W = No reference 0.1K/W = No reference

PRELIMINARY DATA

Page 4/5 UK

GENERAL INFORMATION

CONNECTIONS	Connections		Power	Control	
	Screwdriver advised		Philips™ NR2	Philips™ NR1	
	Min and max tightening torque		1.8 N.m	0.8 N.m	
	Insulated crimp terminals (round tabs, eyelet type)		M5	M3	
MISC.	Display		Green LED (indicates relay has switched ON)		
	Housing		UL94V0		
	Mounting		2 screws (M4x12mm)		See mounting sheet
	Noise level		No audible noise		
	Weight		100g		

STANDARDS

GENERAL	Standards		IEC60947-1	
	Protection level		IP00	
	Protection against direct touch		None	
	CE marking		Yes	
	UL, cULUS and VDE approvals		Pending	
E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	Pending	No effect
	Electric chocks	EN61000-4-5	Pending	?
	Voltage drop	EN61000-4-11	-	
E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	




PRELIMINARY DATA

Page 5/5 UK

DIMENSIONS AND ACCESSORIES


**Fig.
10**

DIMENSIONS (mm)

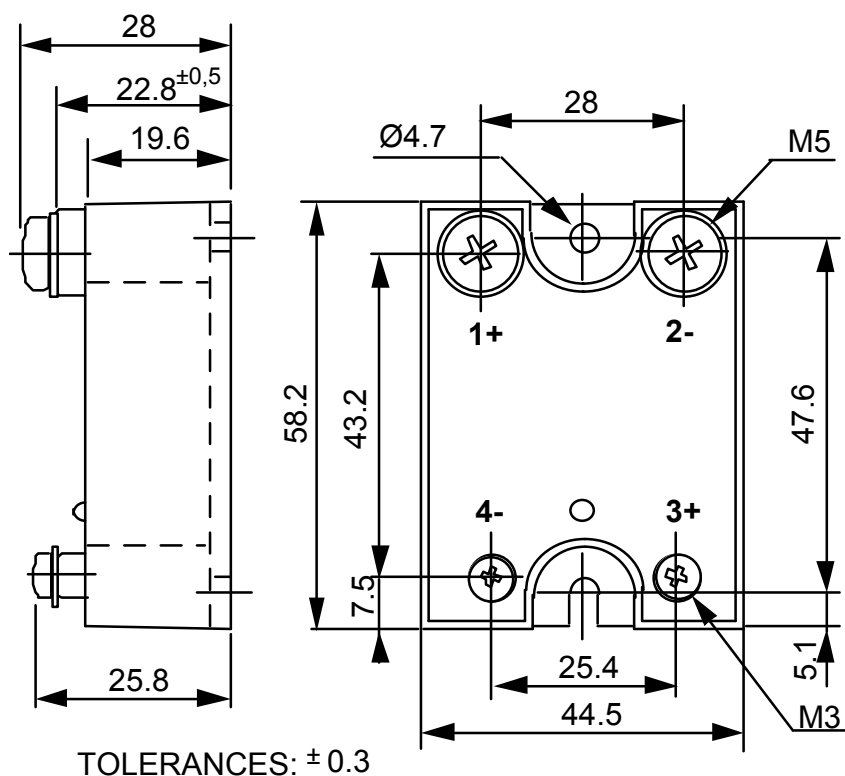

ACCESSORIES

**PROTECTIVE COVER
1K470000**

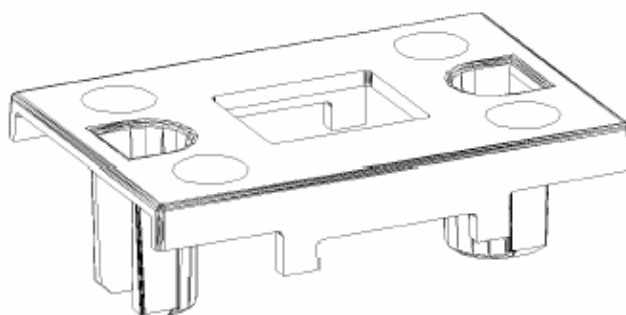

**Please consult our website for other accessory references
(Heatsinks, mounting adaptors, thermal grease...)**